


A hand in a blue glove holds a long-handled roller, applying a dark, viscous substance to a rough, textured surface. The roller is covered in the dark material, and a small puddle of it is visible on the surface below. The background is a light-colored, textured surface.

Construction Chemicals Price List

English - 2026-01

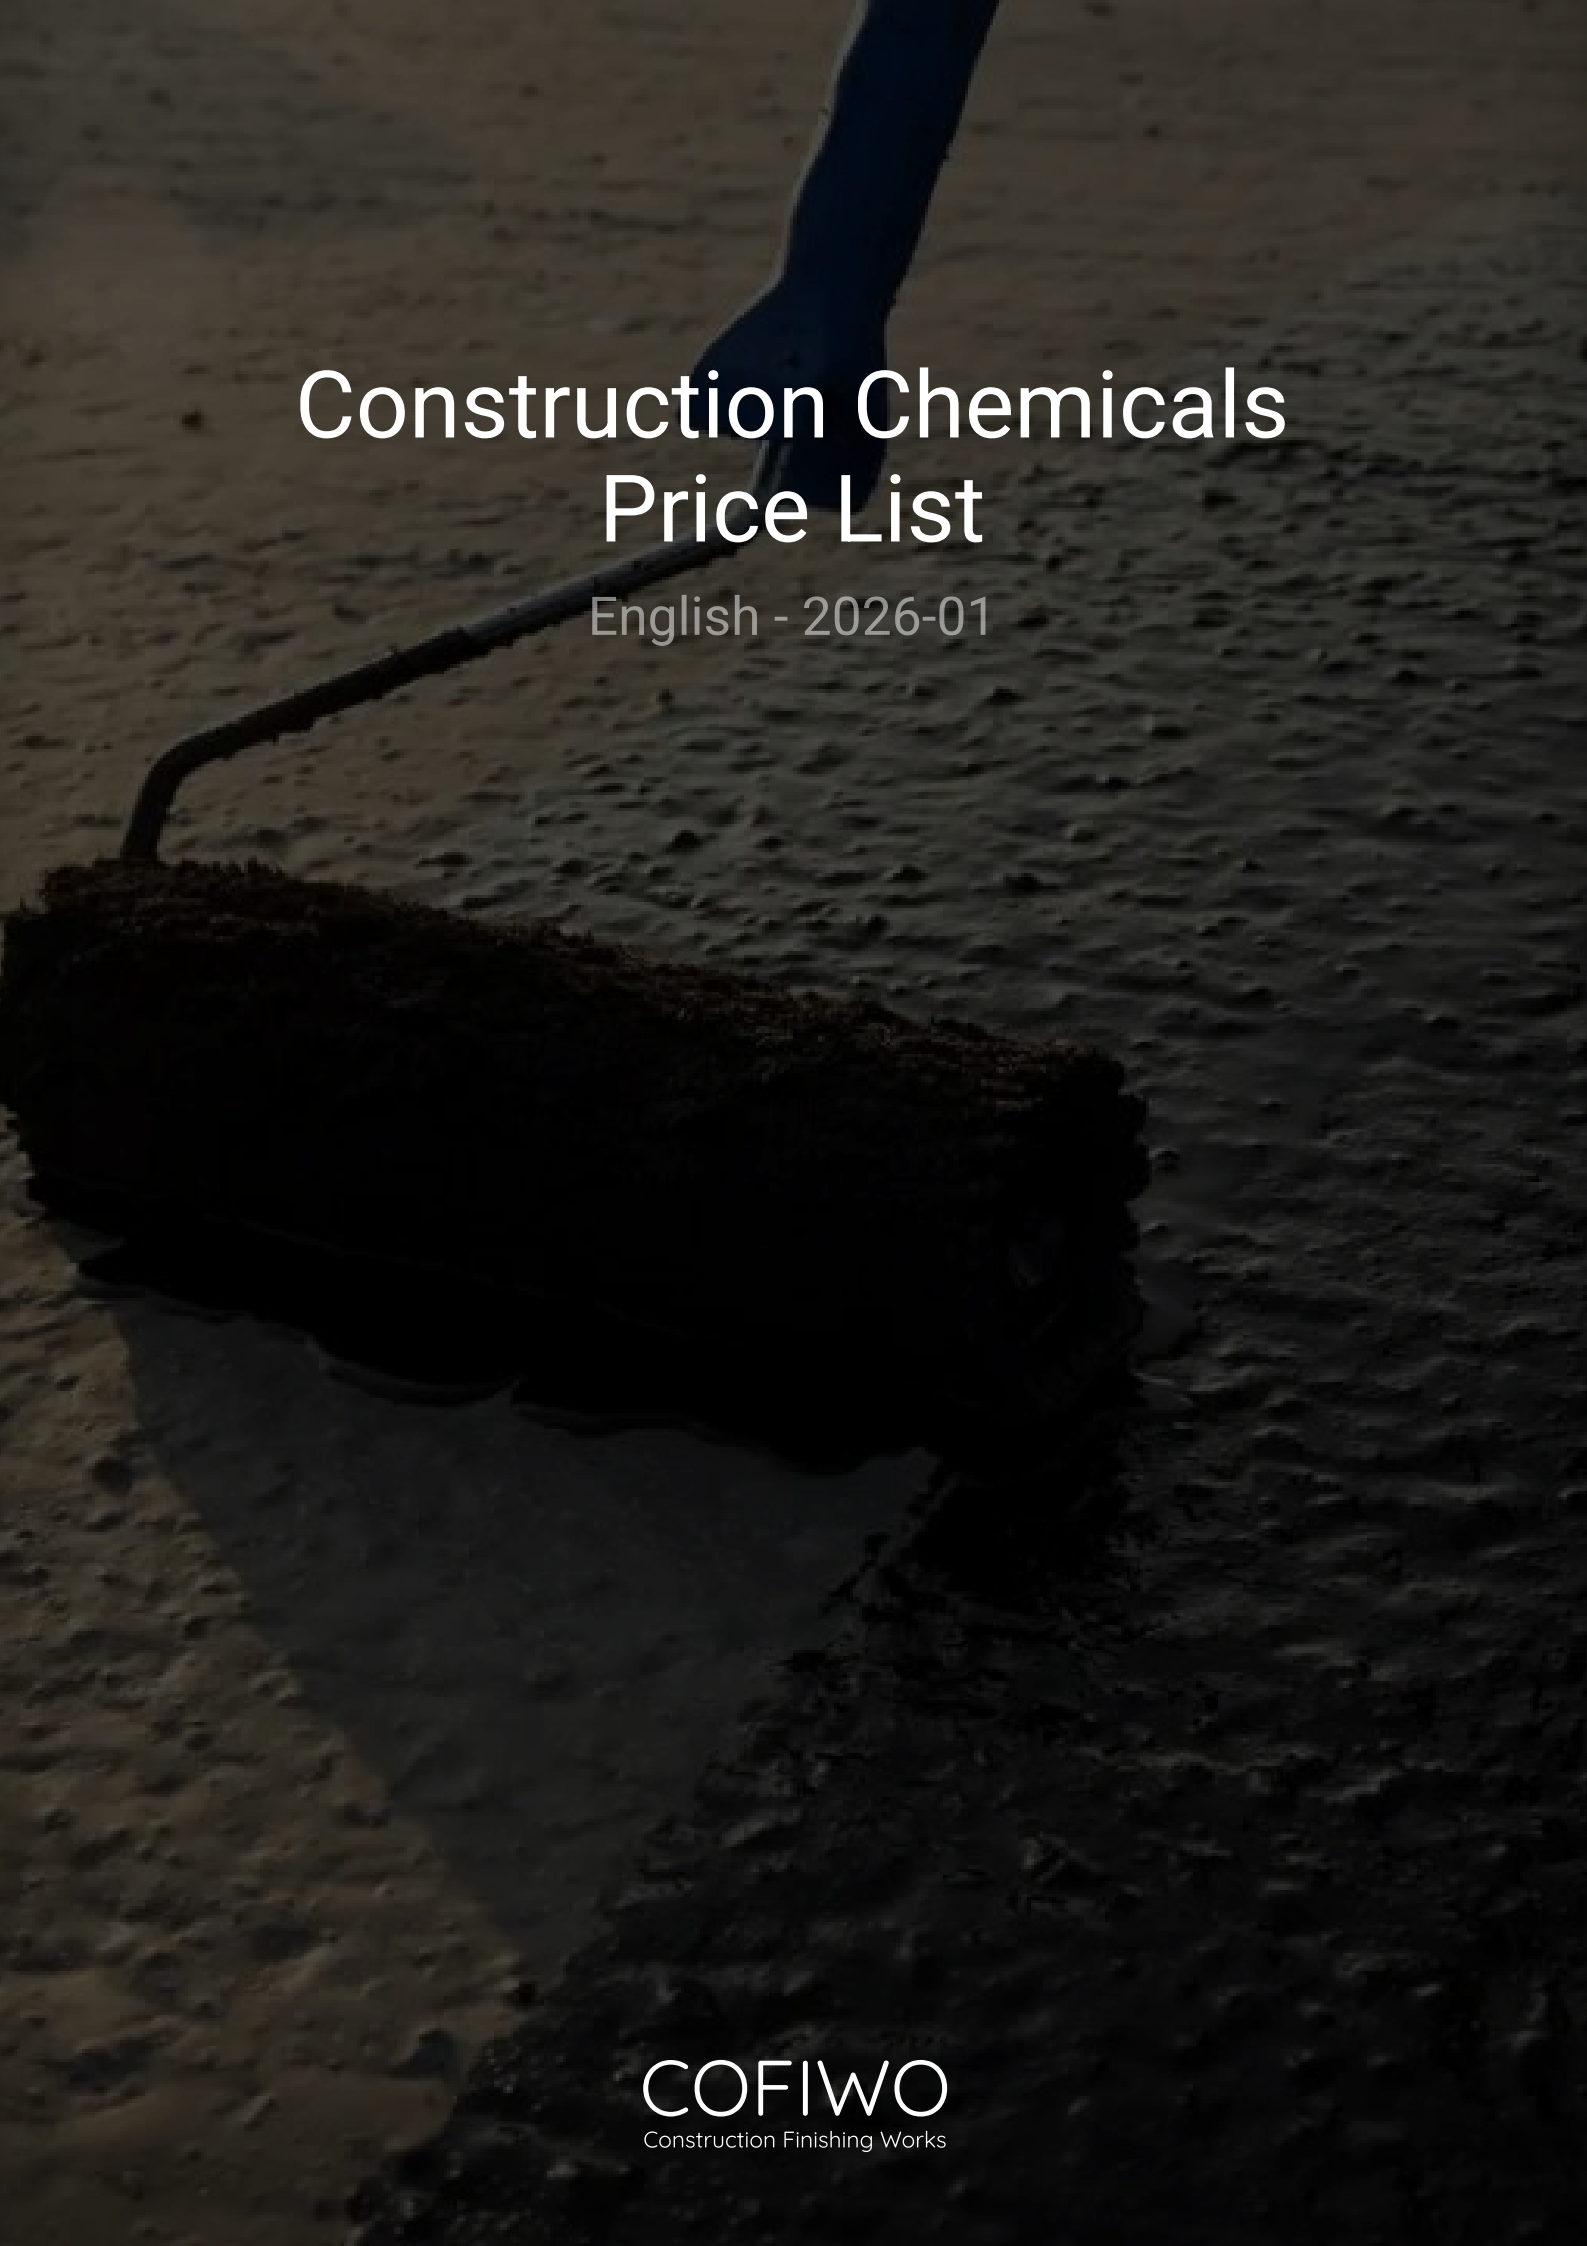

2026 Retail Price List - Waterproofing

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polymera MS MS Polymer Based Liquid Membrane Single component, semi-fluid, ready-to-use, solvent and isocyanate free, UV resistant, high technology coating and waterproofing material, produced with MS Polymer hybrid technology. POLYMER MS is a medium viscosity product used in covering and repairing cracks up to 5 mm on horizontal and vertical surfaces. Product Code: F.68214 Consumption: 1.40 - 1.50 kg/m² per coat for approximately 1 mm thickness. Consumption varies with the application area and the surface roughness and absorption. Color / Color Options: Grey Package Contents: 14 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Waterproofing, flexible bonding and local repairs of vertical and highly inclined surfaces, - On almost all kinds of mineral surfaces, such as concrete, stone, marble, ceramic, tile, all kinds of wood, glass, metal, tile, brick, cement mixed chip panel, gas concrete, and their combinations, - Balconies, terraces or pitched roofs where waterproofing is required, on wood and metal surfaces, in intersections of chimneys, ventilations and skylights, - Wet areas such as bathrooms and kitchens, - Places below ground level, such as foundations, garage and basements, against non-pressurized water and ground moisture.	Package	116,847 FCFA	125,481 FCFA
Polymera MS Fluid MS Polymer Based Fluid Liquid Membrane Single component, fluid, ready-to-use, solvent and isocyanate free, UV resistant, high technology coating and waterproofing material, produced with MS Polymer hybrid technology. POLYMER MS FLUID can be used for waterproofing of horizontal and vertical large surfaces and for bridging capillary cracks up to 3 mm. Product Code: F.68314 Consumption: 1.40 - 1.50 kg/m² per coat for approximately 1 mm thickness. At least 2 coats are recommended. Consumption varies with the application area and the surface roughness and absorption. Color / Color Options: Grey Package Contents: 14 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Waterproofing and local repairs of horizontal surfaces, thanks to its self levelling properties, - Waterproofing and local repair of vertical surfaces, thanks to its ease of application with roller or brush, - On almost all kind of mineral surfaces, such as concrete, stone, marble, ceramic, tile, all kinds of wood, glass, metal, tile, brick, betopan, aerated concrete, and their combinations, - Balconies, terraces or inclined roofs where waterproofing is required, on wood and metal surfaces, in intersections of chimneys, ventilations and skylights, - Wet areas such as bathrooms and kitchens, - Places below ground level, such as foundations, garage and basements, against non-pressurized water and ground moisture.	Package	116,847 FCFA	125,481 FCFA
Aquamer HB Hybrid Polymer Based Liquid Membrane and Coating Single component, ready-to-use, solvent and isocyanate free, UV resistant, high technology coating and waterproofing fluid material, produced with silane terminated hybrid polymer technology. Suitable for light pedestrian traffic. Product Code: F.68514 Consumption: Non-absorbent surfaces: approximately 0.70 kg/m² in 2 coats (2 × 0.35 kg/m²). Absorbent surfaces: approximately 1.00 kg/m² in 3 coats (3 × 0.35 kg/m²). Color / Color Options: Grey Package Contents: 14 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - As a coating material in balconies and terrace roofs with light pedestrian traffic, - On almost every surface, including mineral-based surfaces such as concrete, stone, marble, ceramic, tile, all kinds of wood, glass, metal, tile, brick, betopan, aerated concrete, and their combinations, - Repairing cracks up to 2 mm, - Wet areas such as bathrooms and kitchens, - Places below ground level, such as foundation, garage and basement, against ground moisture, - Waterproofing and local repairs of horizontal surfaces, thanks to its self levelling properties - Waterproofing and local repair of vertical surfaces, thanks to its ease of application with roller or brush - Balconies, terraces or inclined roofs, on wood and metal surfaces, in intersections of chimneys, ventilations and skylights where waterproofing is required.	Package	304,865 FCFA	313,498 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Aquamer HB Invisible Hybrid Polymer Based Transparent Coating and Waterproofing Material Single component, ready-to-use, solvent and isocyanate free, UV resistant, high technology transparent coating and waterproofing fluid material produced with silane terminated hybrid polymer technology. Suitable for light pedestrian traffic. Product Code: F.68605 Consumption: Dust and dirt prevention: approximately 0.20 kg/m² in 1 coat. Non-absorbent surfaces: approximately 0.70 kg/m² in 2 coats (2 × 0.35 kg/m²). Absorbent surfaces: approximately 1.00 kg/m² in 3 coats (3 × 0.35 kg/m²). Color / Color Options: Transparent / Colorless Package Contents: 5 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Balconies and terrace roofs with light pedestrian traffic, - Balconies and terraces covered with glazed tiles, ceramics, natural stone, marble, floor tiles, to provide waterproofing without changing the appearance of the material, - Reinforced concrete, plaster and screed, - Covering cracks upto 2 mm, - Mosaics and mosaic tiles, - Glass and glass brick, - Metals such as iron, steel and aluminum, - Roof coverings such as CTP, PVC and polycarbonate, - Wet areas such as bathrooms and kitchens, - Parquet, wooden doors and window frames as a protecting coating and waterproofing material, - Joint combinations of all of the materials recommended above.	Package	126,499 FCFA	129,582 FCFA
Aquafix Crystallized Waterproofing Material Cement-based, crystallized waterproofing material that can be applied in both positive and negative hydrostatic pressure directions and becomes reactive with water and moisture. It reacts with water, moisture and free lime in the concrete and penetrates deeply into the concrete thanks to its formula consisting of cement, chemicals and specially selected fine aggregates. It creates insoluble minerals in capillary spaces and pores. Product Code: F.61025 Consumption: Under foundations, dry sprinkle: 3 kg/m². Shear-wall coating under positive water pressure: 2 kg/m² in 2 coats. Under negative water pressure: 2.5 kg/m² in 2 coats. Cold joints, slurry application: 3 kg/m². Color / Color Options: Grey or Red Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Interior waterproofing of basement walls and foundations, - Exterior waterproofing of water tanks that are not in the ground, - Retaining walls, - Tunnels and subways, - Floors and horizontal joints, - Elevator pits. - Groundwork and curtain walls, - Water tanks (from both interior and exterior positive waterproofing of the water tanks that are underground), - Swimming pools, - Irrigation canals, - Concrete pipes, - Tunnels and culverts, - Dams, - Cisterns.	Package	19,674 FCFA	35,090 FCFA
Aquafix S Sulphate Resistant Crystallized Waterproofing Material Cement based, sulfate resistant, crystallized mortar in powder form that can be applied in both positive and negative hydrostatic pressure directions and becomes reactive with water and moisture. Penetrates in depth into the concrete, in reaction with the water, moisture and free lime inside the concrete (old/new) with sulphate resistant cement, chemicals and specially selected fine aggregates in its formula, forms crystals that do not dissolve in capillary voids and pores. As it is resistant to sulphate and reactive, it protects the building against sulphate attacks, water and moisture throughout the life of the concrete, and prevents the iron reinforcement from the corrosion. Product Code: F.61225 Consumption: Under foundations, dry sprinkle: 3 kg/m². Shear-wall coating under positive water pressure: 2 kg/m² in 2 coats. Under negative water pressure: 2.5 kg/m² in 2 coats. Cold joints, slurry application: 3 kg/m². Color / Color Options: Grey or Red Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		Negative Water Pressure: - Reinforced concrete buildings for which sulphate causes risks, - Interior waterproofing of basement walls and grounds - Exterior waterproofing of water tanks which are not in the ground - Retaining walls - Tunnels and subways - Floors and horizontal joints - Elevator excavations. Positive Water Pressure: - Waterproofing of all kinds of reinforced concrete constructions which are exposed to sulphate and corrosive salts - Foundations and curtain walls - Water tanks (positive applications from both inside and outside of the water tanks under the ground) - Swimming pools - Irrigation systems and concrete pipes - Tunnels and vents - Dams - Cisterns.	Package	22,499 FCFA	37,916 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Aquafix C Concentrated Crystallized Waterproofing Material Cement-based, crystallized concentrated waterproofing material that can be applied in both positive and negative hydrostatic pressure directions and becomes reactive with water and moisture. It is the concentrated form of AQUAFIX Crystallized Waterproofing Material. It is applied alone or as the first coat before AQUAFIX to provide better penetration into the concrete. Product Code: F.61325 Consumption: Under foundations, dry sprinkle: 3 kg/m². Shear-wall coating under positive water pressure: 2 kg/m² in 2 coats. Under negative water pressure: 2.5 kg/m² in 2 coats. Cold joints, slurry application: 3 kg/m². Color / Color Options: Red Fine Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		Negative Water Pressure: • Interior waterproofing of basement walls and foundations, floors and horizontal joints, • Exterior waterproofing of water tanks that are not in the ground, • Retaining walls, tunnels, subways and elevator pits. Positive Water Pressure: • Groundwork and curtain walls, • Dams, irrigation canals, swimming pools and cisterns, • Concrete pipes, manholes and cisterns.	Package	24,161 FCFA	39,578 FCFA
Aquafix Pro Crystallized Waterproofing Material Cement-based, crystallized waterproofing material specifically developed for waterproofing of foundations that can be applied in positive hydrostatic pressure directions and becomes reactive with water and moisture. It reacts with water, moisture and free lime in the concrete and penetrates deeply into the concrete thanks to its formula consisting of cement, chemicals and specially selected fine aggregates. It creates insoluble minerals in capillary spaces and pores. Product Code: F.60020 Consumption: Under foundations, dry sprinkle: 2 - 3 kg/m². Color / Color Options: Grey Powder Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		It is used for structural waterproofing in concrete under foundation.	Package	13,744 FCFA	26,078 FCFA
Aquafix 2K Double Component Crystallized Waterproofing Material Cement and polymer emulsion based, double component, crystallized waterproofing material which can be applied in both positive and negative hydrostatic pressure directions. It becomes reactive with water and moisture. Due to its crystalline properties, it reacts with water, moisture, and free lime present in the concrete structure, forming crystals that fill the capillary voids in the concrete. At the same time, it creates a waterproof layer on the surface of the applied concrete. Product Code: F.61425 + 60003 Consumption: Against moisture: 2 kg/m² in 2 coats. Against non-pressurized water: 3 kg/m² in 2 coats. Against pressurized water: 4 kg/m² in 2 - 3 coats. Negative-side waterproofing: minimum 3 kg/m². Color / Color Options: Component A: Grey Powder Component B: White Liquid Package Contents: 28 kg (25 kg + 3 kg) set Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Waterproofing horizontal and vertical surfaces, • On exposed concrete surfaces, • On cement-based plasters and screeds, • Waterproofing against both positive and negative water pressure, • Waterproofing structures both below and above ground, • Retaining wall insulation, • Internal waterproofing of underground garage and basement retaining walls (negative waterproofing), • Potable and utility water tanks, • As a waterproofing material against leaks in balconies, bathrooms, kitchens, WCs, and private swimming pools, • Thermal pools and hot water tanks (T ≤ 80°C) as well as brine pools, • Reinforced concrete rain gutters and irrigation channels, • Waterproofing of silos, tunnels, and similar reinforced concrete structures.	Set	36,368 FCFA	53,635 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Aquafix Expan High Strength Shrinkage Compensated Structural Waterproofing Repair Mortar Cement-based, crystallized and non-shrinking structural repair mortar used for filling rod holes, chamfering and segregation repairs on concrete surfaces that gains high strength in a short time and provides water impermeability with the active chemicals it contains. It is resistant to both positive and negative hydrostatic pressure. Thanks to its reactive feature, it provides waterproofing on the concrete surfaces on which it is applied throughout the service life of the structure. Product Code: F.61320 Consumption: A 20 kg bag yields approximately 10 L of mortar. Color / Color Options: Grey Powder Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Repairing all kinds of concrete in contact with water, • Filling around rod holes and crossties, • Repairs requiring early and high strength, • Repairing segregated curtain concrete, • Horizontal and vertical cold joint repairs and chamfering applications, • Filling the gaps formed between old and new concrete, • Filling the core gaps,	Package	15,340 FCFA	27,673 FCFA
Aquafix Likit C Concentrated Crystallized Capillary Waterproofing Concrete Additive Concentrated, crystallized waterproofing liquid additive with reactive properties which forms needle-tipped crystals in the pores and capillary voids in reaction with water, moisture and free lime after it is mixed into the concrete. Product Code: F.62030 Consumption: Dose up to 1% of the cement mass in the concrete. Do not exceed 7 kg per m³ of concrete for any concrete class. Color / Color Options: Light Brown Liquid Package Contents: 30 kg Certification: CE, ISO Warranty: According to System		• All reinforced concrete structures exposed to chemicals that may damage the concrete such as water, moisture, sulfate and chloride ions, • Foundation and curtain concrete, • Bored pile foundation, • Wells and purification plants, • Potable and waste water tanks, • Elevator pits, • Swimming pools, • Dams and irrigation channels, • Concrete pipes, • Tunnels, subways and culverts, • Cisterns, • Retaining walls, • Underground car parks, • Precast concrete elements.	Package	37,969 FCFA	56,469 FCFA
Aquafix Likit C Concentrated Crystallized Capillary Waterproofing Concrete Additive Concentrated, crystallized waterproofing liquid additive with reactive properties which forms needle-tipped crystals in the pores and capillary voids in reaction with water, moisture and free lime after it is mixed into the concrete. Product Code: F.62000 Consumption: Dose up to 1% of the cement mass in the concrete. Do not exceed 7 kg per m³ of concrete for any concrete class. Color / Color Options: Light Brown Liquid Package Contents: 200 kg Certification: CE, ISO Warranty: According to System		• All reinforced concrete structures exposed to chemicals that may damage the concrete such as water, moisture, sulfate and chloride ions, • Foundation and curtain concrete, • Bored pile foundation, • Wells and purification plants, • Potable and waste water tanks, • Elevator pits, • Swimming pools, • Dams and irrigation channels, • Concrete pipes, • Tunnels, subways and culverts, • Cisterns, • Retaining walls, • Underground car parks, • Precast concrete elements.	Package	246,474 FCFA	369,808 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Aquafix Likit Crystallized Capillary Waterproofing Additive for Concrete Crystallized waterproofing liquid additive with reactive properties which forms needle-tipped crystals in the pores and capillary voids in reaction with water, moisture and free lime after it is mixed into the concrete. Product Code: F.61030 Consumption: Dose up to 2% of the cement mass in the concrete. Do not exceed 7 kg per m³ of concrete for any concrete class. Color / Color Options: Light Brown Liquid Package Contents: 30 kg Certification: CE, ISO Warranty: According to System		• All reinforced concrete structures exposed to chemicals that may damage the concrete such as water, moisture, sulfate and chloride ions, • Foundation and curtain concrete, • Bored pile foundation, • Wells and purification plants, • Potable and waste water tanks, • Elevator pits, • Swimming pools, • Dams and irrigation channels, • Concrete pipes, • Tunnels, subways and culverts, • Cisterns, • Retaining walls, • Underground car parks, • Precast concrete elements.	Package	31,985 FCFA	50,485 FCFA
Aquafix Likit Crystallized Capillary Waterproofing Additive for Concrete Crystallized waterproofing liquid additive with reactive properties which forms needle-tipped crystals in the pores and capillary voids in reaction with water, moisture and free lime after it is mixed into the concrete. Product Code: F.61200 Consumption: Dose up to 2% of the cement mass in the concrete. Do not exceed 7 kg per m³ of concrete for any concrete class. Color / Color Options: Light Brown Liquid Package Contents: 200 kg Certification: CE, ISO Warranty: According to System		• All reinforced concrete structures exposed to chemicals that may damage the concrete such as water, moisture, sulfate and chloride ions, • Foundation and curtain concrete, • Bored pile foundation, • Wells and purification plants, • Potable and waste water tanks, • Elevator pits, • Swimming pools, • Dams and irrigation channels, • Concrete pipes, • Tunnels, subways and culverts, • Cisterns, • Retaining walls, • Underground car parks, • Precast concrete elements.	Package	206,584 FCFA	329,917 FCFA
Aquastop Rapid Setting Powder Plugging Mortar Polymer-reinforced powder waterproofing material with special type cement and chemical additives. It hardens within 3 - 4 minutes when it reacts with water and used in the isolation and repair of active water leaks. It provides high adherence. Product Code: F.62105 Consumption: Approximately 2 kg per 1 L of filled volume. Color / Color Options: Grey Powder Package Contents: 5 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • All kinds of mineral based surfaces, • Waterproofing of active water leakages, • Plugging of existing water leakages before waterproofing, • Repair of static cracks, • Groundworks, • Plugging tie rod gaps inside molds, • Waterproofing of basements from inside, • Beveling corners to stop water.	Package	10,318 FCFA	13,401 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Aquacement 2K 251 Double Component Super Elastic Waterproofing Material Cement and acrylic based, super-elastic, double component waterproofing material which can bridge cracks. Components must be mixed to provide waterproofing. Resistant to positive and negative water pressure. Product Code: F.62025 + 63010 Consumption: 1.25 - 1.50 kg/m² per coat for 1 mm thickness. Apply at least 2 coats, total 2.50 - 3.00 kg/m². For stronger protection, apply 3 coats, total 3.75 - 4.50 kg/m². Color / Color Options: Component A: Grey Powder Component B: White Liquid Package Contents: 35 kg (25 kg + 10 kg) set Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Waterproofing areas subject to slight vibrance and movements such as groundwork, retaining walls and basement, • Water tanks, swimming pools (under the coating), • Waterproofing of terrace roofs and balconies (under the coating), • Elevator excavations, • Cisterns, irrigation channels, manholes, concrete pipes, • Wet areas such as bathrooms and kitchens, • Facilities such as thermal springs, • Turkish baths, • Waterproofing of concrete flower receptacle.	Set	57,095 FCFA	70,173 FCFA
Aquacement 2K 250 Double Component Super Elastic Waterproofing Material Cement and acrylic based, super-elastic, double component waterproofing material. Components must be mixed to provide waterproofing. Resistant to positive water pressure. Product Code: F.62125 + 63110 Consumption: 1.75 kg/m² per coat for 1 mm thickness. Apply at least 2 coats, total 3.50 kg/m². For higher protection, apply 3 coats, total 4.50 - 5.50 kg/m². Color / Color Options: Component A: Grey Powder Component B: White Liquid Package Contents: 35 kg (25 kg + 10 kg) set Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Water tanks and swimming pools (under the coating), • Waterproofing of groundwork, retaining walls and basements, • Waterproofing of terrace roofs and balconies (under the coating), • Cisterns, irrigation channels, manholes, concrete pipes, • Wet areas such as bathrooms and kitchens, • Facilities such as thermal springs, • Turkish baths, • Waterproofing of concrete flower receptacle, • Bonding coating materials, ceramic and granit.	Set	43,599 FCFA	65,182 FCFA
Aquacement 2K 207 Double Component Super Elastic Waterproofing Material Cement and acrylic based, super-elastic, double component waterproofing material. Components must be mixed to provide waterproofing. Resistant to positive water pressure. Product Code: F.62020 + 63210 Consumption: 1.00 kg/m² per coat for 1 mm thickness. Apply at least 2 coats. This is the current value in the official FIXA Price List dated 1 May 2026. Color / Color Options: Component A: Grey Powder Component B: White Liquid Package Contents: 30 kg (20 kg + 10 kg) set Certification: CE, ISO Warranty: According to System		• Indoor and outdoor • Horizontal and vertical applications • Water tanks and swimming pools (under the coating) • Waterproofing of groundwork, retaining walls and basements • Waterproofing of terrace roofs and balconies (under the coating) • Cisterns, irrigation channels, manholes, concrete pipes • Wet areas such as bathrooms and kitchens • Facilities such as thermal springs, Turkish baths • Waterproofing of concrete flower receptacle • Bonding ceramics, granite and covering materials.	Set	39,963 FCFA	58,463 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Aquacement 2K 205 Double Component Semi Elastic Waterproofing Material Cement and acrylic based, semi-elastic, double component waterproofing material. Components must be mixed to provide waterproofing. Resistant to positive water pressure. Product Code: F.62220 + 63005 Consumption: 1.00 - 1.50 kg/m² per coat for 1 mm thickness. Apply at least 2 coats, total 2.00 - 3.00 kg/m². For stronger protection, apply 3 coats, total 3.00 - 4.50 kg/m². Color / Color Options: Component A: Grey Powder Component B: White Liquid Package Contents: 25.4 kg (20 kg + 5.4 kg) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Wet areas, such as bathrooms and kitchens, - Waterproofing of terrace roofs and balconies (under the coating), - Waterproofing of concrete flower receptacle.	Set	19,841 FCFA	35,504 FCFA
Aquacement UV 500 Double Component Super Elastic Waterproofing Material White cement and acrylic based, super-elastic, double component waterproofing material with advanced UV resistance. Components must be mixed to provide waterproofing. Resistant to positive water pressure. Product Code: F.62120 + 63310 Consumption: 1.00 - 1.50 kg/m² per coat for 1 mm thickness. Apply at least 2 coats. This is the current value in the official FIXA Price List dated 1 May 2026. Color / Color Options: Component A: White Powder Component B: White Liquid Package Contents: 30 kg (20 kg + 10 kg) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Waterproofing of non trafficable inclined terrace roofs and balconies, - Wet areas such as bathrooms and kitchens, - Water tanks, cisterns, swimming pools, - Groundwork, retaining walls and basement waterproofing, - Irrigation canals, manholes, concrete pipes, - Facilities such as thermal springs, - Turkish baths, - Waterproofing of concrete flower receptacle.	Set	41,758 FCFA	60,258 FCFA
Akrilan 600 Acrylic Based UV Resistant Flexible Liquid Membrane Acrylic (elastomeric) resin based, single component, UV resistant, flexible waterproofing material. Product Code: F.64115 Consumption: Approximately 1.40 kg/m² per coat for 1 mm film thickness. Apply at least 2 coats; 3 coats are recommended where higher protection is required. Color / Color Options: White Acrylic Copolymer Liquid Package Contents: 15 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - On various surfaces such as reinforced concrete galvanized, zinc, aluminium and sheet iron, - Wet areas such as bathrooms and kitchens, - Flat and inclined roofs, - Chimney sides, gutters, eaves, drains, - Terraces and balconies.	Package	44,415 FCFA	53,665 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Akrilan 600E Acrylic Based Liquid Membrane Acrylic (elastomeric) resin based, single component, flexible waterproofing material. Product Code: F.64215 Consumption: Approximately 1.40 kg/m² per coat for 1 mm film thickness. Apply at least 2 coats; 3 coats are recommended where higher protection is required. Color / Color Options: White Acrylic Copolymer Liquid Package Contents: 15 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - On various surfaces such as reinforced concrete galvanized, zinc, aluminium and sheet iron, - Wet areas such as bathrooms and kitchens, - Flat and inclined roofs, - Chimney sides, gutters, eaves, drains, - Terraces and balconies which are not directly exposed to sunlights.	Package	36,935 FCFA	46,185 FCFA
Aqualon Surface Protector and Water Repellent Silicone based, solventborne colorless surface protector and water repellent which prevents rainwater to flow in, by penetrating underneath the surface. Product Code: F.65017 Consumption: 200 - 600 g/m². Consumption may increase on highly absorbent surfaces. Color / Color Options: Transparent / Colorless Liquid Package Contents: 17 L Certification: CE, ISO Warranty: According to System		- Exterior facades of buildings, vertical surfaces - Semi absorbent surfaces such as concrete, plaster, slate stone - Absorbent surfaces such as brick, gas concrete, travertine, natural stone - Restoring and protecting historical buildings from weather conditions.	Package	91,818 FCFA	101,068 FCFA
Izo-Cera Colorless Surface Protector and Water Repellent Silicone based colorless surface protector and water repellent material which prevents the water to flow in by penetrating underneath the surface. It is water based, does not contain solvent. Product Code: F.65120 Consumption: 200 - 700 g/m². Consumption may increase on highly absorbent surfaces. Color / Color Options: White Liquid; The Treatment Is Colorless Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		- Interior and exterior facades of buildings, preferably vertical surfaces - Repelling the water in joints of covering materials such as ceramic, tile, glass mosaic - Outer areas such as balconies, terraces - Wet areas such as bathrooms and kitchens - Semi absorbent surfaces such as concrete, plaster, slate stone - Absorbent surfaces such as brick, gas concrete, travertine, natural stone - Restoring and protecting historical buildings from weather conditions.	Package	111,742 FCFA	124,076 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Bitumfix ER 2K Bitumen - Rubber and Cement Based Double Component Waterproofing Material Polymer modified bitumen rubber based, cement cured, double component, elastic and waterborne waterproofing material. BITUMFIX ER 2K is a thixotropic material which is flexible after curing and has high adherence properties and long aging time. Product Code: F.67032 Consumption: 1.00 - 1.50 kg/m² per coat for 1 mm thickness. Apply at least 2 - 3 coats. Color / Color Options: Component A: Brown Bitumen-Rubber Emulsion, Turning Black After Drying Component B: Grey Cement-Based Powder Package Contents: 32 kg (24 kg + 8 kg) set Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical surfaces, • Protecting and isolating groundwork, retaining walls and curtain walls, • Places such as basement and cellars, • Underneath the coatings in terrace insulation.	Set	43,691 FCFA	63,425 FCFA
Bitumfix PU 1K Bitumen and Polyurethane Based Single Component Waterproofing Material Bitumen - polyurethane based, single component, protective waterproofing material. Thanks to the polyurethane in its content, it bonds strongly to the surface and generates a layer that is more resistant to water and moisture. Product Code: F.67025 Consumption: 1.50 - 2.00 kg/m² per coat. Apply at least 2 coats. Consumption varies with surface absorption and roughness. Color / Color Options: Black Emulsion Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Outdoor, • Horizontal and vertical surfaces, • On surfaces of materials such as concrete, stone, ethemite and metal, • Waterproofing the foundation and shear walls of reinforced concrete structures against ground moisture and seepage water, • Canals, flumes and rain creeks (excluding PVC based rain gutters), • Underneath the coatings in waterproofing of balconies, terraces and green roofs.	Package	92,308 FCFA	107,724 FCFA
Bitumfix PU 2K Bitumen and Polyurethane Based Double Component Waterproofing Material Bitumen - polyurethane based, double component, protective, super elastic waterproofing material. Thanks to the polyurethane in its content, it bonds strongly to the surface and generates a layer that is more resistant to water and moisture. Product Code: F.67130 Consumption: 1.50 - 2.00 kg/m² per coat. Apply at least 2 coats. Consumption varies with surface absorption and roughness. Color / Color Options: Component A: Black Emulsion Component B: Transparent Viscous Liquid Package Contents: 30 kg (15 kg + 15 kg) set Certification: CE, ISO Warranty: According to System		• Outdoor, • Horizontal and vertical surfaces, • On surfaces of materials such as concrete, stone, ethemite and metal, • Waterproofing the foundation and shear walls of reinforced concrete structures against ground moisture and seepage water, • Bridges, canals, flumes and rain creeks (excluding PVC based rain gutters), Waterproofing of retaining walls and isolation of water tanks from outside, • Underneath the coatings in waterproofing of balconies, terraces and green roofs.	Set	130,715 FCFA	149,215 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polan A Polyurethane Floor Primer Polyurethane based, single component, solventborne, transparent and ready to use primer which dries fast and is developed for rough and absorbent surfaces. It forms a middle layer to provide the coating adhere better. Product Code: F.57015 Consumption: 150 - 300 g/m² in 1 coat. Consumption varies with surface absorption and roughness. Color / Color Options: Transparent Liquid Package Contents: 15 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor - On concrete, plaster and absorbent surfaces - As a primer prior to the coating on highly uneven or damp surfaces - As an adherence increasing primer on floors, under polyurethane, MS or hybrid based waterproofing materials, floor coverings and top coat paints - Surfaces with PVC, EPDM, bitumen and other polymeric membranes - As a primer for polyurethane based parquet adhesive - Fixing the dusting and crumbling surfaces - Increasing the abrasion resistance of mineral based surfaces.	Package	78,322 FCFA	87,572 FCFA
Polan 500 Polyurethane Coating and Waterproofing Material Polyurethane based, single component, ready to use, UV resistant, walkable, solventborne liquid coating and waterproofing material. Product Code: F.57125 Consumption: 500 - 800 g/m² per coat. Apply at least 2 coats. Consumption varies with surface absorption and roughness. Color / Color Options: Standard Colors: Off-White and Grey Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Outdoor, - Surfaces such as concrete, stone, corrugated plate, metal, - Waterproofing of terrace roofs, eaves, - Waterproofing of water tanks and cisterns (except contact with potable water), - Protecting polyurethane foam from UV radiation.	Package	108,929 FCFA	124,346 FCFA
Polan 620 Polyurethane Based Double Component Waterproofing Material Polyurethane based, double component, solvent free liquid waterproofing material. Product Code: F.68006 Consumption: 600 g/m² per coat. Apply at least 2 coats. Color / Color Options: Standard Colors: Pool Blue and Off-White Package Contents: 6 kg (5 kg + 1 kg) set Certification: CE, ISO Warranty: According to System		- Indoor, and outdoor (under the coating), - Horizontal and vertical surfaces, - Surfaces such as concrete, stone, wood and metal, - Water tanks, cisterns, swimming pools.	Set	26,542 FCFA	30,242 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polan 600 Invisible Polyurethane Based Double Component Waterproofing Material Polyurethane based, double component, solvent free liquid waterproofing material. Product Code: F.68102 Consumption: Approximately 250 - 300 g/m² per coat. Apply at least 2 coats. Consumption varies with surface absorption and roughness. Color / Color Options: Transparent Package Contents: 2.5 kg Certification: CE, ISO Warranty: According to System		- Indoor, and outdoor (under the coating), - Horizontal and vertical surfaces, - Surfaces such as concrete, stone, wood and metal, - Water tanks, cisterns, swimming pools.	Package	25,354 FCFA	26,895 FCFA
Polan 600 Invisible Polyurethane Based Double Component Waterproofing Material Polyurethane based, double component, solvent free liquid waterproofing material. Product Code: F.68107 Consumption: Approximately 250 - 300 g/m² per coat. Apply at least 2 coats. Consumption varies with surface absorption and roughness. Color / Color Options: Transparent Package Contents: 7.5 kg Certification: CE, ISO Warranty: According to System		- Indoor, and outdoor (under the coating), - Horizontal and vertical surfaces, - Surfaces such as concrete, stone, wood and metal, - Water tanks, cisterns, swimming pools.	Package	66,087 FCFA	70,712 FCFA
Polan 700 Pure Polyurea Coating and Waterproofing Material 100% polyurea based, double component, flexible spray coating and waterproofing material with high reactivity. It can cover the cracks. Product Code: F.68220 + 68225 Consumption: 1.10 - 1.20 kg/m² per coat for 1 mm thickness. Apply at least 2 coats. Consumption varies with surface absorption and roughness. Color / Color Options: Component A: Light Yellow Liquid Component B: Grey Liquid Package Contents: 420 kg set (220 kg component A + 200 kg component B) Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Residential buildings, shopping malls and business centers, - Coating terraces, balconies and roofs, - Waterproofing and coating of roads open to vehicular traffic, parking lot and garage floors, - Waterproofing of canals, tunnels, pipelines, water tanks, potable water tanks, - Industrial zones, factory floors, - Protection of middle and large size parts in metal industry against corrosion, - Coating of load bearing surfaces in commercial vehicles, - Waterproofing of decorative pools and swimming pools.	Set	3,142,399 FCFA	3,401,399 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polan 710 Hybrid Polyurea Coating and Waterproofing Material Hybrid polyurea based, double component, flexible spray coating and waterproofing material with high reactivity. It can cover the cracks. Product Code: F.68230 + 68235 Consumption: 1.10 - 1.20 kg/m² per coat for 1 mm thickness. Apply at least 2 coats. Consumption varies with surface absorption and roughness. Color / Color Options: Component A: Light Yellow Liquid Component B: Grey Liquid Package Contents: 420 kg set (220 kg component A + 200 kg component B) Certification: CE, ISO Warranty: According to System		• Indoor, and outdoor, • Residential buildings, shopping malls and business centers, • Coating terraces, balconies and roofs, • Waterproofing and coating of roads open to vehicular traffic, parking lot and garage floors, • Waterproofing of canals, tunnels, pipelines, water tanks, potable water tanks, Industrial zones, factory floors, • Protection of middle and large size parts in metal industry against corrosion, • Coating of load bearing surfaces in commercial vehicles, • Waterproofing of decorative pools and swimming pools.	Set	2,500,160 FCFA	2,759,160 FCFA
Polan 750 Hybrid Polyurea Waterproofing Material Hybrid polyurea based, double component, flexible spray coating and waterproofing material with high reactivity. It can cover the cracks. Product Code: F.68240 + 68245 Consumption: 1.10 - 1.20 kg/m² per coat for 1 mm thickness. Apply at least 2 coats. Consumption varies with surface absorption and roughness. Color / Color Options: Component A: Light Yellow Liquid Component B: Grey Liquid Package Contents: 425 kg set (225 kg component A + 200 kg component B) Certification: CE, ISO Warranty: According to System		• Indoor, and outdoor , • Residential buildings, shopping malls and business centers, • Coating terraces, balconies and roofs, • Waterproofing of floors open to light pedestrian traffic, • Waterproofing of canals, tunnels, pipelines, water tanks, potable water tanks, • Protection of middle and large size parts in metal industry against corrosion, • Coating of load bearing surfaces in commercial vehicles, • Waterproofing of decorative pools and swimming pools.	Set	2,388,644 FCFA	2,650,728 FCFA
Impermo PVC Waterproofing Tape Elastic, thermoplastic elastomer based joint waterproofing tape with polyester knit fabric, isolating construction and dilatation joints. Product Code: F.69001 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Blue-Grey Centre with White Sides Package Contents: 100/50 mm x 50 m roll Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Wet areas such as pools, water tanks, bathrooms and wc before tile, ceramics and waterproofing applications, • Pipe inlet-outlet details of water tanks, pools, • Between layers of waterproofing materials applied by brush, on perpendicular corners at balconies and terraces, • Isolating dynamic (moving) cracks and construction joints on floors and curtain walls	Roll	28,450 FCFA	30,468 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Impermo PVC Waterproofing Tape Elastic, thermoplastic elastomer based joint waterproofing tape with polyester knit fabric, isolating construction and dilatation joints. Product Code: F.69002 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Blue-Grey Centre with White Sides Package Contents: 120/70 mm x 50 m roll Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Wet areas such as pools, water tanks, bathrooms and wc before tile, ceramics and waterproofing applications, • Pipe inlet-outlet details of water tanks, pools, • Between layers of waterproofing materials applied by brush, on perpendicular corners at balconies and terraces, • Isolating dynamic (moving) cracks and construction joints on floors and curtain walls	Roll	30,444 FCFA	32,462 FCFA
Impermo PU Waterproofing Tape Polyurethane waterproofing ready-to-use joint tape with polyester non-woven substrate and 160% extension break, made of three special coated layers. The middle part is composed of waterproofing polyurethane membrane; the other two layers are of non-woven polyester. There are holes of 2 cm on both corners. Product Code: F.69101 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: White Package Contents: 120 mm x 50 m roll Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Wet areas such as pools, water tanks, bathrooms and WC, • Pipe inlet-outlet details of water tanks, pools, • Drainer details, • Between layers of waterproofing materials applied by brush, on perpendicular corners at balconies and terraces, provides waterproofing and prevents cracks.	Roll	41,694 FCFA	43,510 FCFA
Impermo Sodium Bentonite Based Water Swellable Tape Sodium bentonite and butyl rubber based water swellable tape for joints. Makes concrete joints waterproof by swelling upon contact with water. Product Code: F.69220 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Black Package Contents: 5 mm x 20 mm x 20 m roll Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Swimming pools, water tanks and purification facilities, • Joints of foundation and shear wall, • Manholes, • Pipe inlet-outlets, • Construction joints in cable canals, • Tunnel segments, • Joints of fresh and old concrete, • Construction joints.	Roll	53,610 FCFA	55,151 FCFA




Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Impermo Sodium Bentonite Based Water Swellable Tape Sodium bentonite and butyl rubber based water swellable tape for joints. Makes concrete joints waterproof by swelling upon contact with water. Product Code: F.69210 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Black Package Contents: 10 mm x 20 mm x 10 m roll Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Swimming pools, water tanks and purification facilities, • Joints of foundation and shear wall, • Manholes, • Pipe inlet-outlets, • Construction joints in cable canals, • Tunnel segments, • Joints of fresh and old concrete, • Construction joints.	Roll	36,656 FCFA	38,198 FCFA
Impermo Acryl-300 Acrylic Based Water Swellable Tape Acrylic polymer and rubber based, high performance, hydrophilic water stop, elastic water swellable tape for joints. Makes concrete joints waterproof by swelling up to 300% upon contact with water. Product Code: F.69505 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Red Package Contents: 5 mm x 20 mm x 20 m roll Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Swimming pools, water tanks and purification facilities, • Joints of foundation and shear wall, • Manholes, • Pipe inlet-outlets, • Construction joints in cable canals, • Tunnel segments, • Joints of fresh and old concrete, • Construction joints.	Roll	76,214 FCFA	77,756 FCFA
Impermo Acryl-300 Acrylic Based Water Swellable Tape Acrylic polymer and rubber based, high performance, hydrophilic water stop, elastic water swellable tape for joints. Makes concrete joints waterproof by swelling up to 300% upon contact with water. Product Code: F.69510 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Red Package Contents: 10 mm x 20 mm x 10 m roll Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Swimming pools, water tanks and purification facilities, • Joints of foundation and shear wall, • Manholes, • Pipe inlet-outlets, • Construction joints in cable canals, • Tunnel segments, • Joints of fresh and old concrete, • Construction joints.	Roll	50,950 FCFA	52,492 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Impermo TPE Thermoplastic Elastomer Based Water Swellable Tape Thermoplastic elastomer (TPE) water swellable tape for joints with hydrophilic particles, offering high swelling capacity and long cyclic durability. Makes concrete joints waterproof by swelling up to 400% upon contact with water. Product Code: F.69605 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Red Package Contents: 5 mm x 20 mm x 20 m roll Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Swimming pools, water tanks and purification facilities, • Joints of foundation and shear wall, • Manholes, • Pipe inlet-outlets, • Construction joints in cable canals, • Tunnel segments, • Joints of fresh and old concrete, • Construction joints.	Roll	60,258 FCFA	61,800 FCFA
Impermo TPE Thermoplastic Elastomer Based Water Swellable Tape Thermoplastic elastomer (TPE) water swellable tape for joints with hydrophilic particles, offering high swelling capacity and long cyclic durability. Makes concrete joints waterproof by swelling up to 400% upon contact with water. Product Code: F.69610 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Red Package Contents: 10 mm x 20 mm x 10 m roll Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Swimming pools, water tanks and purification facilities, • Joints of foundation and shear wall, • Manholes, • Pipe inlet-outlets, • Construction joints in cable canals, • Tunnel segments, • Joints of fresh and old concrete, • Construction joints.	Roll	56,934 FCFA	58,475 FCFA
Impermo Combi Waterproofing Tape for Dilatation Ready-to-use thermoplastic elastomer based tape for dilatation joints. Product Code: F.69301 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Grey Package Contents: 20 cm x 20 m roll Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Any engineering structure, such as dams, highways, tunnels, subways, • Water tanks, pools, parking garages and shopping malls, • Vertical and horizontal applications for expansion dilatation joints, • Raft foundation reinforced concrete wall intersections completed internally and externally.	Roll	50,040 FCFA	53,269 FCFA

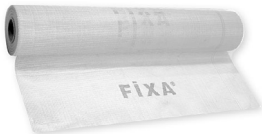

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Impermo Combi Waterproofing Tape for Dilatation Ready-to-use thermoplastic elastomer based tape for dilatation joints. Product Code: F.69302 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Grey Package Contents: 25 cm x 20 m roll Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Any engineering structure, such as dams, highways, tunnels, subways, - Water tanks, pools, parking garages and shopping malls, - Vertical and horizontal applications for expansion dilatation joints, - Raft foundation reinforced concrete wall intersections completed internally and externally.	Roll	62,217 FCFA	66,254 FCFA
Impermo Combi Waterproofing Tape for Dilatation Ready-to-use thermoplastic elastomer based tape for dilatation joints. Product Code: F.69303 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: Grey Package Contents: 30 cm x 20 m roll Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Any engineering structure, such as dams, highways, tunnels, subways, - Water tanks, pools, parking garages and shopping malls, - Vertical and horizontal applications for expansion dilatation joints, - Raft foundation reinforced concrete wall intersections completed internally and externally.	Roll	77,054 FCFA	81,898 FCFA
Impermo Waterproofing Mesh Waterproofing mesh with high alkaline resistance, woven with glass fiber, used to increase the resistance against capillary crack formation and support waterproofing systems where resistance to higher water pressure is required. Product Code: F.69401 Consumption: Measured by running metre. No area-based consumption rate applies. Color / Color Options: White Package Contents: 100 cm x 100 m roll Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - All waterproofing applications with brush, where alkaline resistance is required, - Places where high water pressure is required, such as water tanks, pools, - Balconies and terraces, to provide resistance against cracks between the layers of waterproofing materials applied by brush, - Places exposed to movements, vibrations and slight settlements such as foundation, retaining walls and basements.	Roll	43,570 FCFA	57,697 FCFA



2026 Retail Price List - Sealants

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polymera MS 925 MS Polymer Based Sealant (LM) MS polymer based, single component, low modulus (LM), elastic, solvent and isocyanate free hybrid construction sealant which does not contain solvent and isocyanate. Product Code: F.81925 Consumption: Per 1 running metre: 6 × 6 mm joint = 36 ml / 50.40 g; 10 × 10 mm = 100 ml / 140 g; 20 × 12 mm = 240 ml / 336 g. Color / Color Options: Standard: White, Grey, Black and Dark Brown. Other RAL colors are available as special production. Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - All indoor and outdoor dilatation joints of high buildings, - All kinds of cladding facade joints, - Rain gutters and construction intersections for sealing, - Bathrooms and kitchens, in joints of shower cabin, bath tub, washbasin, kitchen sink etc. - Joint combinations of glass, ceramic, tiles and glazed surfaces, - Joint combinations of metal, aluminum, wood and glass, - Joints of stainless, galvanized or black steels - Filling joints of natural materials such as marble, natural stone and granite, - Intersection details of prefabricated elements, - Sealing window, door and roofs.	Sausage	6,993 FCFA	7,484 FCFA
Polymera MS 940 MS Polymer Based Sealant (HM) MS Polymer based, single component, high modulus (HM), elastic, solvent and isocyanate free hybrid construction joint filler and adhesive. It is developed for bonding and sealing roof, facade, sandwich panel, container, wood, metal, composite and prefabricated assembly works. Product Code: F.81940 Consumption: Per 1 running metre: 6 × 6 mm joint = 36 ml / 49.32 g; 10 × 10 mm = 100 ml / 137 g; 20 × 12 mm = 240 ml / 329 g. Color / Color Options: Standard: White, Grey, Black, Dark Brown and Anthracite. Other RAL colors are available as special production. Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical joint combinations and dilatation joints , - Roof and terrace dilatations and in joints of parapet corners, - To absorb vibrations in intersection details and joints of cabin and body of containers, truck booths etc. - Intersection details of prefabricated elements, - Assembly and isolation of sandwich panels in roofs and facades, - Bathrooms and kitchens, in joints of shower cabin, bath tub, washbasin, kitchen sink etc. - Joint combinations of glass, ceramic, tiles and glazed surfaces, - Joint combinations of metal, aluminum, wood and glass, - Joints of stainless, galvanized or black steels, - Filling joints of natural materials such as marble, natural stone and granite, - Assembly and sealing of wood, metal, PVC, concrete, cement mixed chip panel and various composite boots, construction and container intersections.	Sausage	6,993 FCFA	7,484 FCFA
PU 970 Polyurethane Low Modulus Sealant (LM) Polyurethane based, single component, low modulus (LM) sealant which is an ideal product for static and dynamic expansion joints of construction elements. Product Code: F.81970 Consumption: Varies with joint width. Size the quantity from the actual joint geometry; no single ml/m rate applies. Color / Color Options: Standard: Grey, White and Black. Other RAL colors are available as special production. Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical dilatation joints, - Roof and terrace dilatations and joints of parapet corners, - Intersection details of prefabricated elements, - Between precast wall panels, - As a sealant in joints of PVC, wood, metal, aluminum and plastic joinery.	Sausage	4,134 FCFA	4,625 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
PU 971 Polyurethane High Modulus Sealant (HM) Polyurethane based, single component, high modulus (HM) sealant and adhesive which is developed to provide adhesion and waterproofing in roofs, facades, sandwich panels, containers, wood, metal, composite and prefabricated structural elements. Product Code: F.81971 Consumption: Varies with joint width. Size the quantity from the actual joint geometry; no single ml/m rate applies. Color / Color Options: Standard: Grey, White and Black. Other RAL colors are available as special production. Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical joint combinations and dilatation joints, - Roof and terrace dilatations and in joints of parapet corners, - To absorb vibrations in intersection details and joints of containers, truck booths etc. - Intersection details of prefabricated elements, - Assembly and isolation of sandwich panels in roof and facades, - Assembly and sealing of wood, metal, PVC, concrete, cement mixed chip panel and various composite boots, construction and container intersections.	Sausage	4,134 FCFA	4,625 FCFA
AS 910 Siliconized Acrylic Sealant Acrylic dispersion based, silicone added, single component, multi-purpose sealant resistant to weather conditions. It is an economical and ideal sealant for static joints of the buildings. Product Code: F.80910 Consumption: Varies with the application surface. Recommended joint width-to-depth ratio: 2:1. Color / Color Options: Standard: White, Grey, Black, Dark Brown and Golden Oak. Other RAL colors are available as special production. Package Contents: Gross 500 g Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Installation of window, wooden or PVC joinery, - Sealing window frames, - Baseboards.	Package	961 FCFA	1,289 FCFA
SS 930E Multi-purpose Silicone Sealant Silicone based, multi-purpose, single component (acetoxo) sealant which is cured with the moisture in the air. Can be used indoor and outdoor. Product Code: F.80929 Consumption: Varies with the application surface. Color / Color Options: Transparent and White Package Contents: Gross 280 g Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Bathrooms and kitchens, in joints of shower cabin, bath tub, washbasin, kitchen sink etc. - Glass assembly works, - Sealing window frames, - For sealing and filling purposes in door and window gaps.	Package	1,650 FCFA	1,834 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
SS 930 Multi-purpose Silicone Sealant Silicone based, multi-purpose, single component (acetoxo) sealant which is cured with the moisture in the air. Can be used indoor and outdoor. Product Code: F.80930 Consumption: Varies with the application surface. Color / Color Options: Standard: Transparent, White, Black, Grey and Dark Brown. Special: Silver Grey, Golden Oak, Anthracite, Cream, Beige and Bronze Package Contents: 280 ml (gross 320 g) Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Bathrooms and kitchens, in joints of shower cabin, bath tub, washbasin, kitchen sink etc. • Glass assembly works, • Sealing window frames, • For sealing and filling purposes in door and window gaps.	Package	1,857 FCFA	2,067 FCFA
SS 930X Multi Purpose Silicone Sealant Silicone based, multi-purpose, single component (acetoxo) sealant which is cured with the moisture in the air. Can be used indoor and outdoor. Product Code: F.80928 Consumption: Varies with the application surface. Color / Color Options: Standard: Transparent, White, Black, Grey and Dark Brown. Special: Silver Grey, Golden Oak, Anthracite, Cream, Beige and Bronze Package Contents: 300 ml (gross 345 g) Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Bathrooms and kitchens, in joints of shower cabin, bath tub, washbasin, kitchen sink etc. • Glass assembly works, • Sealing window frames, • For sealing and filling purposes in door and window gaps.	Package	1,995 FCFA	2,221 FCFA
SS 931 Universal Silicone Sealant (100% Silicone) High quality, multi-purpose, 100% silicone, solvent-free, single component (acetoxo) sealant which is cured with the moisture in the air. Can be used indoor and outdoor. Product Code: F.80931 Consumption: Varies with the application surface. Color / Color Options: Transparent, White and Black Package Contents: 300 ml Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Bathrooms and kitchens, in joints of shower cabin, bath tub, washbasin, kitchen sink etc. • Glass assembly works, • Sealing window frames, • Isolation of cold storage depots, • For sealing and filling purposes in door and window gaps.	Package	2,461 FCFA	2,691 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
SS 932 Sanitary Silicone Sealant High quality, 100% silicone, solvent-free, single component (acetoxo) sealant which is cured with the moisture in the air. Can be used in wet areas such as bathrooms and kitchens for sealing and filling purposes. Product Code: F.80932 Consumption: Varies with the application surface. Color / Color Options: Transparent and White Package Contents: 280 ml (gross 340 g) Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Wet areas such as bathrooms and kitchens, - For sealing in installation of products such as toilet, bath tubs, washbasins, - Installation and rounds of shower cabins for sealing purposes, - Joint of tiles which is open to water contact, - Sealing kitchen appliances and hygienic devices and equipments, - For sealing of cold storage depots and refrigerated vehicles.	Package	2,260 FCFA	2,483 FCFA
SS 932X Shower Cabin Silicone Sealant High quality, 100% silicone, solvent-free, single component (acetoxo) sealant which is cured with the moisture in the air. Can be used in wet areas such as shower cabins, bathrooms and kitchens for sealing and filling purposes. Product Code: F.80927 Consumption: Varies with the application surface. Color / Color Options: Transparent and White Package Contents: 300 ml (gross 360 g) Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Wet areas such as bathrooms and kitchens, - For sealing in installation of products such as toilet, bath tubs, shower cabins, washbasins, - Installation and rounds of shower cabins for sealing purposes, - Joint of tiles which is open to water contact, - Sealing kitchen appliances and hygienic devices and equipments, - For sealing of cold storage depots and refrigerated vehicles.	Package	2,397 FCFA	2,633 FCFA
SS 933 RTV Heat Resistant Silicone Sealant High quality, solvent-free, single component (acetoxo), red colored silicone sealant which is cured with the moisture in the air. Developed for the applications of engines and mechanical parts exposed to high temperatures. Product Code: F.80933 Consumption: Varies with the application surface. Color / Color Options: Red Package Contents: 300 ml Certification: CE, ISO Warranty: According to System		- Places exposed to continuous high temperatures, - Automotive motor components, differential cover, gear-case cover, motor hood and carburetor cover sealing, - Diluted acidic and basic environments, - Steam installations, as sealant in places exposed to hot water and steam, - Sealing chemical reactors, - Hot-air pipes, - Industrial mechanic parts, - All sealing applications exposed to mechanical or chemical heating.	Package	2,594 FCFA	2,824 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
SS 934 Construction Neutral Construction Silicone Sealant High quality, single component, 100% silicone, solvent-free sealant with neutral oxime structure, cured with the humidity in the air, which can be used in all kinds of indoor and outdoor areas of the building. Product Code: F.80934 Consumption: Per 1 running metre: 6 × 6 mm joint = 36 ml / 36.72 g glossy or 48.60 g matte; 10 × 10 mm = 100 ml / 102 g glossy or 135 g matte; 20 × 12 mm = 240 ml / 244.80 g glossy or 324 g matte. Color / Color Options: Matte Standard: Black, Grey, Golden Oak, Dark Brown, Anthracite, White, Beige, Cream and RAL 7046. Matte Special: Other matte RAL colors. Glossy Standard: Transparent, Silver Grey, Bronze and Glittered Copper. Glossy Special: Other glossy RAL colors. Package Contents: 300 ml cartridge Certification: CE, ISO Warranty: According to System		- Indoor and outdoor - All kinds of aluminum cladding facade joints - As a sealing material in construction joints - Bathrooms and kitchens, in joints of shower cabin, bath tub, washbasin, kitchen sink etc. - Glass assembly works - Joint combinations of glass, aluminum and glazed surfaces, - Sealing window frames - Isolation of cold storage depots - For sealing and filling purposes in door and window gaps, - All kinds of joint applications due to its neutral characteristics.	Cartridge	2,328 FCFA	2,558 FCFA
SS 934 Construction Neutral Construction Silicone Sealant High quality, single component, 100% silicone, solvent-free sealant with neutral oxime structure, cured with the humidity in the air, which can be used in all kinds of indoor and outdoor areas of the building. Product Code: F.81934 Consumption: Per 1 running metre: 6 × 6 mm joint = 36 ml / 36.72 g glossy or 48.60 g matte; 10 × 10 mm = 100 ml / 102 g glossy or 135 g matte; 20 × 12 mm = 240 ml / 244.80 g glossy or 324 g matte. Color / Color Options: Matte Standard: Black, Grey, Golden Oak, Dark Brown, Anthracite, White, Beige, Cream and RAL 7046. Matte Special: Other matte RAL colors. Glossy Standard: Transparent, Silver Grey, Bronze and Glittered Copper. Glossy Special: Other glossy RAL colors. Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		- Indoor and outdoor - All kinds of aluminum cladding facade joints - As a sealing material in construction joints - Bathrooms and kitchens, in joints of shower cabin, bath tub, washbasin, kitchen sink etc. - Glass assembly works - Joint combinations of glass, aluminum and glazed surfaces, - Sealing window frames - Isolation of cold storage depots - For sealing and filling purposes in door and window gaps, - All kinds of joint applications due to its neutral characteristics.	Sausage	4,124 FCFA	4,583 FCFA
SS 994 Facade Neutral, Facade Silicone Single component, weather resistant, high strength, neutral alkoxy structure (weatherseal), 100% silicone sealant developed for exterior use. Product Code: F.80994 Consumption: Per 1 running metre: 6 × 6 mm joint = 36 ml / 51.48 g; 10 × 10 mm = 100 ml / 143 g; 20 × 10 mm = 200 ml / 286 g. Color / Color Options: Black Package Contents: 300 ml cartridge Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - In all curtain wall joints, including structural facade joints, - As a sealing material in construction joints, - In laminated glass applications, - In glass installation and joinery isolation, - On many surfaces such as coated and anodized aluminum, wood, concrete, brick, ceramic, porcelain.	Cartridge	3,259 FCFA	3,489 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
SS 994 Facade Neutral, Facade Silicone Single component, weather resistant, high strength, neutral alkoxy structure (weatherseal), 100% silicone sealant developed for exterior use. Product Code: F.81994 Consumption: Per 1 running metre: 6 × 6 mm joint = 36 ml / 51.48 g; 10 × 10 mm = 100 ml / 143 g; 20 × 10 mm = 200 ml / 286 g. Color / Color Options: Black Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - In all curtain wall joints, including structural facade joints, - As a sealing material in construction joints, - In laminated glass applications, - In glass installation and joinery isolation, - On many surfaces such as coated and anodized aluminum, wood, concrete, brick, ceramic, porcelain.	Sausage	5,786 FCFA	6,015 FCFA
SS 935 Marble and Natural Stone Silicone Sealant High quality, 100% silicone, single component, neutral, solvent-free sealant which is cured with the moisture in the air. Can be used in joints of construction materials such as natural stone, marble and granite. Product Code: F.80935 Consumption: Per 1 running metre: 6 × 6 mm joint = 36 ml / 36.36 g; 10 × 10 mm = 100 ml / 101 g; 20 × 12 mm = 240 ml / 242.40 g. Color / Color Options: Transparent, White, Grey, Black and Dark Brown Package Contents: 300 ml Certification: CE, ISO Warranty: According to System		- Indoor and outdoor - Sensitive surfaces such as natural stone, marble and granite - Joints of facade coverings such as natural stone, marble and granite - Joint combinations of glass, aluminum and glazed surfaces - Sealing window frames.	Package	3,392 FCFA	3,621 FCFA
SS 936 Neutral Silicone Sealant High quality, single component, 100% silicone, solvent-free sealant with neutral oxime structure, cured with the humidity in the air, which can be used in indoor and outdoor. Product Code: F.80936 Consumption: Per 1 running metre: 6 × 6 mm joint = 36 ml / 36.72 g glossy or 48.60 g matte; 10 × 10 mm = 100 ml / 102 g glossy or 135 g matte; 20 × 12 mm = 240 ml / 244.80 g glossy or 324 g matte. Color / Color Options: Transparent, White, Grey, Black and Dark Brown Package Contents: 300 ml Certification: CE, ISO Warranty: According to System		- Indoor and outdoor - Automotive and transportation industries, in sheet metal and panel installations - Production of durable white goods for isolation purposes - As sealing material in home appliances - Bathrooms and kitchens, in joints of shower cabin, bath tub, washbasin, kitchen sink etc. - Sealing electronic and sensitive metal surfaces - Joint combinations of glass, aluminum and glazed surfaces.	Package	2,727 FCFA	2,957 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
SS 937 Aquarium Silicone Sealant High quality, 100% silicone, single component (acetox), solvent-free sealant which is cured with the moisture in the air. Specifically developed for aquariums and can be used indoor and outdoor. Product Code: F.80937 Consumption: Varies with the application surface. Color / Color Options: Transparent and Black Package Contents: 300 ml Certification: CE, ISO Warranty: According to System		• Indoor and outdoor • Inside the aquariums • Potable water tanks.	Package	2,461 FCFA	2,691 FCFA
SS 939 Mirror Silicone Sealant High quality, 100% silicone, single component, neutral, solvent-free sealant which is cured with the moisture in the air. Provides bonding of mirrors and ceramics without damaging the glazed surfaces. Product Code: F.80939 Consumption: Varies with the application surface. Color / Color Options: Transparent and Black Package Contents: 300 ml Certification: CE, ISO Warranty: According to System		• Indoor and outdoor • Fixing all kinds of mirrors • Joint combinations of glass, aluminum and glazed surfaces • Fixing the wall tiles and accessories with glazed surfaces.	Package	2,727 FCFA	2,957 FCFA
PU 960 Multi Purpose PU Foam Single component, general purpose polyurethane foam which is cured by expanding with the moisture in the air. Product Code: F.80960 Consumption: Varies with the application area. Consumption is controlled by the spray angle and applied pressure. Color / Color Options: Natural Package Contents: 750 ml (600 g) Certification: CE, ISO Warranty: According to System		• Inner and outer expansion joints of buildings • Terrace dilatations • Installation and isolation of frames of doors and windows • Isolation of hot and cold water pipes, electrical installations • Filling gaps, wide cracks and holes.	Package	2,908 FCFA	3,302 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
PU 960 Multi Purpose PU Foam Single component, general purpose polyurethane foam which is cured by expanding with the moisture in the air. Product Code: F.80985 Consumption: Varies with the application area. Consumption is controlled by the spray angle and applied pressure. Color / Color Options: Natural Package Contents: 750 ml (850 g) Certification: CE, ISO Warranty: According to System		• Inner and outer expansion joints of buildings • Terrace dilatations • Installation and isolation of frames of doors and windows • Isolation of hot and cold water pipes, electrical installations • Filling gaps, wide cracks and holes.	Package	3,887 FCFA	4,444 FCFA
PU 962 Multi-purpose Professional Polyurethane Foam Single component, general purpose polyurethane foam which is cured by expanding with the moisture in the air. Used with its special application gun. Product Code: F.80962 Consumption: Varies with the application area. Consumption is controlled by the spray angle and applied pressure. Color / Color Options: Natural Package Contents: 750 ml (850 g) Certification: CE, ISO Warranty: According to System		• Inner and outer expansion joints of buildings • Terrace dilatations • Installation and isolation of frames of doors and windows • Isolation of hot and cold water pipes, electrical installations • Filling gaps, wide cracks and holes.	Package	4,153 FCFA	4,710 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



2026 Retail Price List - Repair & Restoration

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Repairfix 5W Fine Repair Mortar (White) White cement based, single component, polymer added, fine aggregated surface repair and smoothing mortar which offers a smooth finishing in concrete surfaces. Complies with R2 class. Product Code: F.32025.01 Consumption: 1.50 kg/m² for 1 mm thickness. Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Restorations, • Repairing concrete and prefabricated concrete elements, • Smoothing and repairing wall and ceiling plaster, • Prior to painting, ceramic covering and waterproofing in order to have a flat and sound surface. Suitable for static cracks up to 5 mm.	Package	9,956 FCFA	18,628 FCFA
Repairfix 30W Coarse Repair Mortar (White) White cement based, single component, polymer added, coarse aggregated surface repair and smoothing mortar which offers a smooth finishing in concrete surfaces. Complies with R2 class. Product Code: F.32125.01 Consumption: 2.00 kg/m² for 1 mm thickness. Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Restorations, • Repairing concrete and prefabricated concrete elements, • Smoothing and repairing wall and ceiling plaster, • Prior to painting, ceramic covering and isolation in order to have a flat and sound surface. Suitable for static cracks up to 30 mm.	Package	10,031 FCFA	18,703 FCFA
Repairgrout Expan T60 High Strength Shrinkage Compensated Grout Mortar Cement based, single component, shrinkage compensated, thixotropic, high strength structural grout mortar. Complies with R4 class. Product Code: F.32225 Consumption: Approximately 20 kg/m² for 10 mm thickness. Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal, vertical and overhead repair applications, • Repairs that require early high strength, • Repairing reinforced concrete construction elements and floors, • Repairing concrete with segregation, • Grouting joints that exist between old and new concrete, • Grouting tie-rod holes, core holes and beveling applications, • Grouting the gaps that exist around the installation pipes and elements.	Package	11,013 FCFA	19,685 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Repairgrout Expan-S T60 High Strength Sulphate Resistant Shrinkage Compensated Grout Mortar Cement based, single component, sulphate resistant, shrinkage compensated, thixotropic, high strength structural grout mortar. Complies with R4 class. Product Code: F.32425 Consumption: Approximately 20 kg/m² for 10 mm thickness. Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal, vertical and overhead repair applications, - Repairing and protecting reinforced concrete surfaces which are exposed to sulphate and corrosive salts, - Repairing and protecting bridges, canals and ports thanks to its resistance to the sulphate, - Maintenance and repair of marine buildings, - Repairs that require early high strength, - Repairing reinforced concrete construction elements and floors, - Repairing concrete with segregation, - Grouting joints that exist between old and new concrete, - Grouting tie-rod holes and core holes, - Grouting the gaps that exist around the installation pipes and elements.	Package	11,164 FCFA	19,836 FCFA
Repairgrout Expan T45 High Strength Shrinkage Compensated Grout Mortar Cement based, single component, shrinkage compensated, thixotropic, high strength structural grout mortar. Complies with R4 class. Product Code: F.32625 Consumption: Approximately 20 kg/m² for 10 mm thickness. Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal, vertical and overhead repair applications, - Repairs that require early high strength, - Repairing reinforced concrete, prefabricated construction elements and floors, - Repairing concrete with segregation, - Grouting joints that exist between old and new concrete, - Grouting tie-rod holes, core holes and beveling applications, - Grouting the gaps that exist around the installation pipes and elements, - Reinforcing the connections of the curtains and the beams.	Package	9,956 FCFA	18,628 FCFA
Repairgrout Expan T35 High Strength Shrinkage Compensated Grout Mortar Cement based, single component, shrinkage compensated, thixotropic, high strength structural grout mortar. Complies with R3 class. Product Code: F.32525 Consumption: Approximately 20 kg/m² for 10 mm thickness. Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal, vertical and overhead repair applications, - Repairing reinforced concrete, prefabricated construction elements and floors, - Repairing concrete with segregation, cracks and abration, - Grouting joints that exist between old and new concrete, - Grouting the gaps that exist around the installation pipes and elements.	Package	9,502 FCFA	18,174 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Repairgrout GP F65 Shrinkage Compensated Flowable Grout and Anchoring Mortar Cement based, single component, shrinkage compensated, high strength grout and anchoring mortar in fluid consistency. Complies with R4 class, does not segregate or bleed. Product Code: F.32220 Consumption: Approximately 18 - 20 kg/m² for 10 mm thickness. Approximately 2 kg of powder is used per 1 L of mortar. Color / Color Options: Grey Powder Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Anchoring and bedding of machinery feet, • As a fluid mortar, in hard to access places, • Repairs that require early high strength, • Filling and strengthening the gaps and voids between column and beam conjunctions, • Repairs of concrete that is exposed to segregation by using mold.	Package	10,020 FCFA	16,957 FCFA
Repairgrout GP-S F65 Shrinkage Compensated Flowable Sulphate Resistant Grout and Anchoring Mortar Cement based, single component, shrinkage compensated, high strength grout and anchoring mortar in fluid consistency. Complies with R4 class, does not segregate or bleed. Resistant to sulphate. Product Code: F.32320 Consumption: Approximately 18 - 20 kg/m² for 10 mm thickness. Approximately 2 kg of powder is used per 1 L of mortar. Color / Color Options: Grey Powder Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • As a fluid mortar, in hard to reach areas (under soil and water etc.) of reinforced concrete buildings which are exposed to sulphate and corrosive salts, • Repairing bridges, canals and ports thanks to its resistance to the sulphate, • Maintenance and repair of marine buildings, • Anchoring and bedding of machinery feet • Repairs that require early high strength, • Filling and strengthening the gaps and voids between column and beam conjunctions, • Repairs of concrete that is exposed to segregation by using mold.	Package	10,503 FCFA	17,441 FCFA
Repairgrout GP F50 Shrinkage Compensated Flowable Grout and Anchoring Mortar Cement based, single component, shrinkage compensated, high strength grout and anchoring mortar in fluid consistency. Complies with R4 class, does not segregate or bleed. Product Code: F.32920 Consumption: Approximately 18 - 20 kg/m² for 10 mm thickness. Approximately 2 kg of powder is used per 1 L of mortar. Color / Color Options: Grey Powder Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Anchoring and bedding of machinery feet, • As a fluid mortar, in hard to access places, • Repairs that require early high strength, • Filling and strengthening the gaps and voids between column and beam conjunctions, • Repairs of concrete that is exposed to segregation by using mold.	Package	9,173 FCFA	16,111 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Repairgrout GP F40 Shrinkage Compensated Flowable Grout and Anchoring Mortar Cement based, single component, shrinkage compensated, high strength grout and anchoring mortar in fluid consistency. Complies with R3 class, does not segregate or bleed. Product Code: F.32820 Consumption: Approximately 18 - 20 kg/m² for 10 mm thickness. Approximately 2 kg of powder is used per 1 L of mortar. Color / Color Options: Grey Powder Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • As a fluid mortar, in hard to access places, • Repairs that require early high strength, • Filling and strengthening the gaps and voids between column and beam conjunctions, • Repairs of concrete that is exposed to segregation by using mold.	Package	8,327 FCFA	15,265 FCFA
Repairgrout Fast Fast Setting Shrinkage Compensated Flowable Grout Mortar Cement based, single component, shrinkage compensated, fast setting, high strength grout mortar in fluid consistency which does not segregate or bleed. Complies with R4 class. Product Code: F.32325 Consumption: Approximately 20 kg/m² for 10 mm thickness. Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Elevating manhole covers, • Assembling curbstones and borders, • Anchoring poles and city furnitures, • Anchoring machinery feet, • Repairing field concrete, runways and helipads, • Areas where quick usage and fast strength is required, • Assembling the concrete elements of prefabricated constructions, • Filling the gaps in places that are hard to access.	Package	13,204 FCFA	21,876 FCFA
RepoX 301 Epoxy Repair Mortar Epoxy resin based, three component epoxy repair mortar, resistant to corrosive chemicals. Used in repairing concrete surfaces which are exposed to mechanical impacts. Product Code: F.33015 Consumption: Approximately 2.00 kg/m² for 1 mm thickness. A 15 kg set yields approximately 7.5 L of mortar. Color / Color Options: Component A: Grey Liquid Component B: Light Yellow Liquid Component C: Sand-Colored Aggregate Package Contents: 15 kg set Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Repairing reinforced concrete, • Protecting and repairing subsurface structures, • Repairing and maintaining marine structures (such as docks, bridges), • Assembling and repairing crane beams and base plates that require high strength, • Repairing ceilings, columns and beams.	Set	40,787 FCFA	50,615 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
RepoX 302 Epoxy Anchoring and Mounting Mortar Epoxy resin based, three component epoxy anchoring and mounting mortar, highly resistant to corrosion. Used for anchoring bolts and irons to concrete, rock or walls. Product Code: F.33115 Consumption: Consumption: Approx. 1.95 kg/m² per 1 mm thickness; Anchoring: Min. 7.54 g and Max. 91.56 g per hole. See the technical data sheet for exact consumption. Color / Color Options: Component A: Grey Liquid Component B: Light Yellow Liquid Component C: Sand-Colored Aggregate Package Contents: 15 kg set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Fixing connecting rods on reinforced concrete, - Fixing anchoring elements, - Repairing wide cracks, - Highways, bridges, viaducts, dams, - Fixing guardrails on bridges, steel ladders, cranes and viaducts, - Anchoring and mounting all types of metal and steel components on reinforced concrete, metal and steel surfaces.	Set	39,790 FCFA	49,618 FCFA
RepoX 310 Epoxy Repair, Adhesive and Assembly Mortar Epoxy resin based, solvent free, thixotropic, double component structural repair, adhesive and assembly mortar. Product Code: F.33208 Consumption: 1.65 - 3.30 kg/m² for 1 - 2 mm thickness. An 8 kg set yields approximately 4.8 L of mortar. Color / Color Options: Component A: Cream Paste Component B: Dark Grey Liquid Package Contents: 8 kg set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Repairing reinforced concrete such as columns, beams and shear walls, - Repairing wide cracks, - Bonding ceramics, hard natural stones, mortars and brick walls, - Bonding steel, iron, wood and glass.	Set	39,837 FCFA	45,079 FCFA
RepoX 340 Polyester Chemical Anchoring Adhesive Multi-purpose, polyester resin based, double component chemical anchoring adhesive in cartridge. Cures fast and has high strength. Product Code: F.33355 Consumption: Varies with the volume of the application area. Color / Color Options: Light Grey After Homogeneous Mixing Package Contents: 345 ml cartridge Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Mounting machines on vertical and horizontal surfaces, - Fixing the irons, - Reinforcing the buildings, - Mounting of radiators and pipes, - Mounting of awning, shutter systems, canopy and signboards, - Mounting of billboards and lighting systems, - Fixing of bolts, large size screws, studs, satellite antennas, banisters and similar materials to the concrete or stone surfaces.	Cartridge	3,011 FCFA	3,417 FCFA



2026 Retail Price List - Flooring Systems

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Monofix 100 Quartz Aggregated Surface Hardener Abrasion resistant powder surface hardener consisting of a mixture of special type cement, high quality quartz aggregate and performance-enhancing chemical additives, applied monolithically on fresh concrete surfaces. It provides wear, impact, dust and abrasion resistance against light and medium loads on concrete surfaces. Product Code: F.51125 Consumption: Light and medium loads: 4 - 5 kg/m². Color / Color Options: Grey Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Factories, business centers, • Garages, parking lots and basement floors, • Hangars and mechanical workshops, • Loading and unloading areas, • Subway stations and underground passages, • Parks and gardens, pedestrian ways and pavements.	Package	8,067 FCFA	16,739 FCFA
Monofix 100 Quartz Aggregated Surface Hardener Abrasion resistant powder surface hardener consisting of a mixture of special type cement, high quality quartz aggregate and performance-enhancing chemical additives, applied monolithically on fresh concrete surfaces. It provides wear, impact, dust and abrasion resistance against light and medium loads on concrete surfaces. Product Code: F.51125.43 Consumption: Light and medium loads: 4 - 5 kg/m². Color / Color Options: Red Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Factories, business centers, • Garages, parking lots and basement floors, • Hangars and mechanical workshops, • Loading and unloading areas, • Subway stations and underground passages, • Parks and gardens, pedestrian ways and pavements.	Package	9,200 FCFA	17,872 FCFA
Monofix 100 Quartz Aggregated Surface Hardener Abrasion resistant powder surface hardener consisting of a mixture of special type cement, high quality quartz aggregate and performance-enhancing chemical additives, applied monolithically on fresh concrete surfaces. It provides wear, impact, dust and abrasion resistance against light and medium loads on concrete surfaces. Product Code: F.51125.55 Consumption: Light and medium loads: 4 - 5 kg/m². Color / Color Options: Green Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Factories, business centers, • Garages, parking lots and basement floors, • Hangars and mechanical workshops, • Loading and unloading areas, • Subway stations and underground passages, • Parks and gardens, pedestrian ways and pavements.	Package	10,862 FCFA	19,534 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Monofix 200 Mineral and Corundum Aggregated Surface Hardener Abrasion resistant powder surface hardener consisting of a mixture of special type cement, high quality mineral and corundum aggregate and performance-enhancing chemical additives, applied monolithically on fresh concrete surfaces. It provides wear, impact, dust and abrasion resistance against light, medium and heavy loads on concrete surfaces. Product Code: F.51225 Consumption: Light and medium loads: 5 - 5.5 kg/m². Heavy loads: 7 - 8 kg/m². Color / Color Options: Grey Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Factories, business centers, commercial storages, • Garages, parking lots and basement floors, • Mechanical workshops, • Power stations, • Shipyards and loading docks, • Subway stations and underground passages, • Parks and gardens, pedestrian ways and pavements, • Heliports and airfields.	Package	9,351 FCFA	18,023 FCFA
Monofix 200 Mineral and Corundum Aggregated Surface Hardener Abrasion resistant powder surface hardener consisting of a mixture of special type cement, high quality mineral and corundum aggregate and performance-enhancing chemical additives, applied monolithically on fresh concrete surfaces. It provides wear, impact, dust and abrasion resistance against light, medium and heavy loads on concrete surfaces. Product Code: F.51225.43 Consumption: Light and medium loads: 5 - 5.5 kg/m². Heavy loads: 7 - 8 kg/m². Color / Color Options: Red Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Factories, business centers, commercial storages, • Garages, parking lots and basement floors, • Mechanical workshops, • Power stations, • Shipyards and loading docks, • Subway stations and underground passages, • Parks and gardens, pedestrian ways and pavements, • Heliports and airfields.	Package	10,107 FCFA	18,779 FCFA
Monofix 200 Mineral and Corundum Aggregated Surface Hardener Abrasion resistant powder surface hardener consisting of a mixture of special type cement, high quality mineral and corundum aggregate and performance-enhancing chemical additives, applied monolithically on fresh concrete surfaces. It provides wear, impact, dust and abrasion resistance against light, medium and heavy loads on concrete surfaces. Product Code: F.51225.55 Consumption: Light and medium loads: 5 - 5.5 kg/m². Heavy loads: 7 - 8 kg/m². Color / Color Options: Green Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Factories, business centers, commercial storages, • Garages, parking lots and basement floors, • Mechanical workshops, • Power stations, • Shipyards and loading docks, • Subway stations and underground passages, • Parks and gardens, pedestrian ways and pavements, • Heliports and airfields.	Package	11,467 FCFA	20,139 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Monofix 300 Corundum Aggregated Surface Hardener Abrasion resistant powder surface hardener consisting of a mixture of special type cement, high quality corundum aggregate and performance-enhancing chemical additives, applied monolithically on fresh concrete surfaces. It provides wear, impact, dust and abrasion resistance against light, medium and heavy loads on concrete surfaces. Product Code: F.51325 Consumption: Light and medium loads: 5 - 6 kg/m². Heavy loads: 7 - 9 kg/m². Color / Color Options: Grey Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Factories, business centers, commercial storages, • Garages, parking lots and basement floors, • Mechanical workshops, • Power stations, • Shipyards and loading docks, • Subway stations and underground passages, • Parks and gardens, pedestrian ways and pavements, • Heliports and airfields.	Package	11,769 FCFA	20,441 FCFA
Monofix 300 Corundum Aggregated Surface Hardener Abrasion resistant powder surface hardener consisting of a mixture of special type cement, high quality corundum aggregate and performance-enhancing chemical additives, applied monolithically on fresh concrete surfaces. It provides wear, impact, dust and abrasion resistance against light, medium and heavy loads on concrete surfaces. Product Code: F.51325.43 Consumption: Light and medium loads: 5 - 6 kg/m². Heavy loads: 7 - 9 kg/m². Color / Color Options: Red Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Factories, business centers, commercial storages, • Garages, parking lots and basement floors, • Mechanical workshops, • Power stations, • Shipyards and loading docks, • Subway stations and underground passages, • Parks and gardens, pedestrian ways and pavements, • Heliports and airfields.	Package	12,373 FCFA	21,045 FCFA
Monofix 300 Corundum Aggregated Surface Hardener Abrasion resistant powder surface hardener consisting of a mixture of special type cement, high quality corundum aggregate and performance-enhancing chemical additives, applied monolithically on fresh concrete surfaces. It provides wear, impact, dust and abrasion resistance against light, medium and heavy loads on concrete surfaces. Product Code: F.51325.55 Consumption: Light and medium loads: 5 - 6 kg/m². Heavy loads: 7 - 9 kg/m². Color / Color Options: Green Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Factories, business centers, commercial storages, • Garages, parking lots and basement floors, • Mechanical workshops, • Power stations, • Shipyards and loading docks, • Subway stations and underground passages, • Parks and gardens, pedestrian ways and pavements, • Heliports and airfields.	Package	13,582 FCFA	22,254 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Monofix Liquid Dusting Preventive Liquid Surface Hardener Low viscosity, colorless liquid surface hardener that protects the surface from dusting and abrasion. Increases the resistance of the surface against water. Enhances chemical and mechanical resistance. Product Code: F.52030 Consumption: Approximately 200 - 250 g/m² per coat. Consumption varies with concrete absorption and porosity. Color / Color Options: Transparent Liquid Package Contents: 30 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • All horizontal and vertical surfaces, • Concrete floors, cement based screeds, tile and stone covered floors that are required to be hardened and dust free, • Natural stones and pressed brick covered floors, • Factories, industrial fields and mechanical workshops, • Storages and garages, • Basement floors and pedestrian ways.	Package	18,112 FCFA	37,768 FCFA
Monofix Liquid Dusting Preventive Liquid Surface Hardener Low viscosity, colorless liquid surface hardener that protects the surface from dusting and abrasion. Increases the resistance of the surface against water. Enhances chemical and mechanical resistance. Product Code: F.52180 Consumption: Approximately 200 - 250 g/m² per coat. Consumption varies with concrete absorption and porosity. Color / Color Options: Transparent Liquid Package Contents: 180 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • All horizontal and vertical surfaces, • Concrete floors, cement based screeds, tile and stone covered floors that are required to be hardened and dust free, • Natural stones and pressed brick covered floors, • Factories, industrial fields and mechanical workshops, • Storages and garages, • Basement floors and pedestrian ways.	Package	107,579 FCFA	225,517 FCFA
Monoprimer Primer for Floor Acrylic based, ready-to-use, single component primer, used on absorbent surfaces and on surfaces that are likely to dust. Product Code: F.31220 Consumption: 100 - 200 g/m². Consumption varies with concrete absorption and roughness. Color / Color Options: White Liquid Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Highly absorbent surfaces, • Increase adherence and prevent dusting, prior to applications of floor materials such as leveling screed, • As a primer prior to ceramics application, • For increasing adherence before ceiling plastering applications, • For increasing adherence against dusting on concrete surfaces that will be subject to pedestrian traffic.	Package	34,558 FCFA	47,663 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Monofloor 100 C35 Ready to Use Self-levelling Compound (2 - 10 mm) C35 class, cement based self-levelling floor screed which can be applied up to 10 mm thickness, to eliminate defects and roughnesses on the surface. Product Code: F.54025 Consumption: 1.60 - 1.80 kg/m² for 1 mm thickness. Color / Color Options: Grey Fine Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and dry environments, • Residential buildings, • Hospitals, • Education facilities, • Shopping malls, stores and markets, • Levelling the surface in 2 - 10 mm thickness before laying ceramics, granites, marble, wood, parquet, laminate, carpet, linolium and PVC coverings.	Package	14,625 FCFA	23,297 FCFA
Monofloor 100 C25 Ready to Use Self-levelling Compound (2 - 10 mm) C25 class, cement based self-levelling floor screed which can be applied up to 10 mm thickness, to eliminate defects and roughnesses on the surface. Product Code: F.53025 Consumption: 1.60 - 1.80 kg/m² for 1 mm thickness. Color / Color Options: Grey Fine Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and dry environments, • Residential buildings, • Hospitals, • Education facilities, • Shopping malls, stores and markets, • Levelling the surface in 2 - 10 mm thickness before laying ceramics, granites, marble, wood, parquet, laminate, carpet, linolium and PVC coverings.	Package	13,461 FCFA	22,133 FCFA
Monofloor 100 C25E Ready to Use Self-levelling Compound (2 - 10 mm) C25 class, cement based self-levelling floor screed which can be applied up to 10 mm thickness, to eliminate defects and roughnesses on the surface. Product Code: F.52025 Consumption: 1.60 - 1.80 kg/m² for 1 mm thickness. Color / Color Options: Grey Fine Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and dry environments, • Residential buildings, • Hospitals, • Education facilities, • Shopping malls, stores and markets, • Levelling the surface in 2 - 10 mm thickness before laying ceramics, granites, marble, wood, parquet, laminate, carpet, linolium and PVC coverings.	Package	10,636 FCFA	19,307 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Maxifloor Gypsum Based Ready-mixed Floor Mortar Gypsum (calcium sulphate) based floor mortar that dries quickly and allows thick application (2 - 10 cm), used for the purpose of eliminating and correcting surface defects on slab concrete. Product Code: F.50035 Consumption: 16 - 17 kg/m² for 1 cm thickness. Color / Color Options: Off-White Fine Powder Package Contents: 35 kg Certification: CE, ISO Warranty: According to System		- Indoor and in dry environments, - Residential buildings, - Hospitals, - Education facilities, - Shopping malls, stores and markets, - On slab concrete, - Floors with heating systems, - Levelling the surface 2 - 10 cm before laying ceramics, granites, marble, natural stone, hardwood, parquet, laminate, epoxy, carpet and PVC coverings.	Package	10,299 FCFA	22,440 FCFA
Topfloor Gypsum Based Self-levelling Floor Mortar (2 - 10 mm) Gypsum (calcium sulphate) based self-levelling floor mortar applied 2 - 10 mm, used for the purpose of eliminating and correcting surface defects on slab concrete. Product Code: F.50125 Consumption: 1.50 - 1.60 kg/m² for 1 mm thickness. Color / Color Options: White Fine Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and in dry environments, - Residential buildings, - Hospitals, - Education facilities, - Shopping malls, stores and markets, - Concrete floors or floors covered with MAXIFLOOR, - Floors with heating systems, - Levelling the surface in 2 - 10 mm before laying ceramics, granites, marble, hardwood, parquet, laminate, epoxy, carpet, PVC and linoleum coverings.	Package	9,895 FCFA	18,567 FCFA
Floorfix Rapid 10 Acrylic Based High Performance PVC Floor Covering Adhesive Acrylic based, solvent-free, single component, multipurpose dispersion floor covering adhesive for bonding PVC and linoleum floor coverings to pre-leveled surfaces. Adheres fast and strongly. Product Code: F.41320 Consumption: 250 - 350 g/m². Consumption varies with trowel type, applied thickness, surface absorption and smoothness, covering type and ambient conditions. Color / Color Options: Grey Flowable Dispersion Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		- Indoor and dry areas, - Horizontal surfaces, - Residential buildings, - Hospitals, - Educational facilities, - Shopping malls, stores and markets, - Bonding homogenous and heterogenous PVC floor coverings, - Bonding linoleum based floor coverings, - Bonding PVC, foam, latex-based carpets, acoustic vinyl and textile insulation mats to leveled surfaces.	Package	59,702 FCFA	71,264 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Floorfix Flex 30 Acrylic Based Flexible PVC Floor Covering Adhesive Acrylic based, solvent-free, single component, multipurpose dispersion floor covering adhesive for bonding PVC and linoleum floor coverings to pre-leveled surfaces. Adheres fast and strongly. Product Code: F.41220 Consumption: 250 - 350 g/m². Consumption varies with trowel type, applied thickness, surface absorption and smoothness, covering type and ambient conditions. Color / Color Options: Grey Flowable Dispersion Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and dry areas, • Horizontal surfaces, • Residential buildings, • Hospitals, • Educational facilities, • Shopping malls, stores and markets, • Bonding homogenous and heterogenous PVC floor coverings, • Bonding linolium based floor coverings, • Bonding PVC, foam, latex-based carpets, acoustic vinyl and textile insulation mats to leveled surfaces.	Package	58,372 FCFA	69,934 FCFA
Floorfix Tacky 25 Acrylic Based Flexible PVC Floor Covering Adhesive Acrylic based, solvent-free, single component, flexible dispersion floor covering adhesive with improved stickiness for bonding PVC and linoleum floor coverings to pre-leveled surfaces. Offers long workability. Product Code: F.41120 Consumption: 250 - 350 g/m². Consumption varies with trowel type, applied thickness, surface absorption and smoothness, covering type and ambient conditions. Color / Color Options: Grey Flowable Dispersion Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and dry areas, • Horizontal surfaces, • Residential buildings, • Hospitals, • Educational facilities, • Shopping malls, stores and markets, • Bonding homogenous and heterogenous PVC floor coverings, • Bonding linolium based floor coverings, • Bonding rubber based roll coverings.	Package	51,723 FCFA	63,286 FCFA
Floorfix Eco 20 Acrylic Based PVC Floor Covering Adhesive Acrylic based, solvent-free, single component, dispersion floor covering adhesive for bonding PVC and linoleum floor coverings to pre-leveled surfaces. Product Code: F.41020 Consumption: 250 - 350 g/m². Consumption varies with trowel type, applied thickness, surface absorption and smoothness, covering type and ambient conditions. Color / Color Options: Grey Flowable Dispersion Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and dry areas, • Horizontal surfaces, • Residential buildings, • Hospitals, • Educational facilities, • Shopping malls, stores and markets, • Bonding homogenous and heterogenous PVC floor coverings, • Bonding linolium based floor coverings, • Bonding rubber based roll coverings.	Package	46,405 FCFA	57,967 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
RepoX A Solvent-free Epoxy Surface Primer Epoxy resin based; solvent free, double component epoxy floor primer. Forms a film layer on cement based mineral surfaces. Can be used as primer under epoxy and polyurethane based coatings and paints. Product Code: F.90020 Consumption: 150 - 400 g/m² for 140 - 370 µm thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Component A: Transparent Liquid Component B: Yellow Liquid Package Contents: 20 kg (A+B) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - As a primer under the coatings in hygienic environments such as hospitals and laboratories, in food, medicine, dyestuff industries, printing houses, industrial kitchens, airplane maintenance hangars, factories, places where heavy forklift trucks are used, water purification facilities, places exposed to chemical corrosion, warehouses, terminals, shopping malls, schools and parking garages, - As filler and repair mortar when mixed with appropriate aggregate, - Under REPOX epoxy based floor coatings, - As a primer under POLAN polyurethane based floor coatings.	Set	163,417 FCFA	176,521 FCFA
RepoX AD Solvent-free Epoxy Surface Primer with Filler Epoxy resin based; solvent free, double component, epoxy floor primer with low quantity of filler for concrete and cement based mineral surfaces. Can be used as primer under epoxy and polyurethane based floor coatings. Product Code: F.90125 Consumption: 250 - 500 g/m² for 185 - 370 µm thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Component A: Brown Liquid Component B: Yellow Liquid Package Contents: 25 kg (A+B) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - As a primer under the coatings in hygienic environments such as hospitals and laboratories, in food, medicine, dyestuff industries, printing houses, industrial kitchens, airplane maintenance hangars, factories, places where heavy forklift trucks are used, water purification facilities, places exposed to chemical corrosion, warehouses, terminals, shopping malls, schools and parking garages, - As a skimming layer with 1/1 aggregate addition, - As filler and repair mortar when mixed with appropriate aggregate, - Under REPOX epoxy based floor coatings, - As a primer under POLAN polyurethane based floor coatings.	Set	121,166 FCFA	137,546 FCFA
RepoX AH Solvent-free Moisture Tolerant Epoxy Surface Primer Epoxy resin based, solvent free, double component, low viscosity, moisture tolerant epoxy primer, penetration and impregnation material for concrete and cement based mineral surfaces. Product Code: F.90420 Consumption: 150 - 400 g/m² for 140 - 370 µm thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Component A: Transparent Liquid Component B: Brown Liquid Package Contents: 20 kg (A+B) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Places where the surface moisture is maximum 6%, - As a primer under the coatings in hygienic environments such as hospitals and laboratories, in food, medicine, dyestuff industries, printing houses, industrial kitchens, airplane maintenance hangars, factories, places where heavy forklift trucks are used, water purification facilities, places exposed to chemical corrosion, warehouses, terminals, shopping malls, schools and parking garages, - As a primer under REPOX epoxy based floor coatings.	Set	229,902 FCFA	243,006 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
RepoX CAP Solvent-free Epoxy Ceramic Bonding Primer Epoxy resin based, solvent free, double component, nonabsorbent ceramic bonding primer which contains silica sand. Used on ceramics and functions as a bonding bridge for epoxy and polyurethane coatings and paints which will be applied on it. Product Code: F.90620 Consumption: 50 - 100 g/m² for 50 - 100 µm thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Component A: Transparent Liquid Component B: Light Yellow Liquid Package Contents: 20 kg (A+B) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - As a bonding primer under the epoxy coatings in places with ceramic surfaces like hygienic environments such as hospitals and laboratories, in food, medicine, dyestuff industries, industrial kitchens, factories, warehouses, terminals, shopping malls, schools.	Set	150,120 FCFA	163,224 FCFA
RepoX AW Waterborne Epoxy Surface Primer Epoxy resin based, double component, waterborne surface primer for concrete and cement based mineral surfaces. Product Code: F.90820 Consumption: 100 - 200 g/m² for 90 - 180 µm thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Component A: Transparent Liquid Component B: Transparent Liquid Package Contents: 20 kg (A+B) set Certification: CE, ISO Warranty: According to System		- Indoor, - As a primer under the coatings in hygienic environments such as hospitals (especially operation room walls) and laboratories, in food and chemical industries, potable water tanks, terminals, shopping malls, schools, tunnels and parking garages, - Under REPOX epoxy based floor coatings, - As a primer under POLAN polyurethane based floor coatings.	Set	176,714 FCFA	189,818 FCFA
RepoX AC Solvent-free Epoxy Colored Primer and Mid-coat Epoxy resin based, solvent free, double component, colored epoxy surface primer and mid-coat material. Product Code: F.90725 Consumption: 500 - 700 g/m² for 320 - 450 µm thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Component A: RAL K7 Colors. Component B: Yellow or Light Yellow Liquid. Standard RAL K7 range excludes metallic and fluorescent colors and colors beginning with 4000. Package Contents: 25 kg (A+B) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - As mid-coat layer under the coatings in hygienic environments such as hospitals and laboratories, in food, medicine, dyestuff industries, printing houses, industrial kitchens, airplane maintenance hangars, factories, places where heavy forklift trucks are used, water purification facilities, places exposed to chemical corrosion, warehouses, shopping malls, schools and parking garages, - To thicken the primer and give strength by sprinkling aggregate on it, - Under REPOX epoxy based floor coatings, - As mid-coat under POLAN polyurethane based floor coatings.	Set	127,814 FCFA	144,195 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
RepoX 510 Solvent-free Epoxy Coating for Floors Epoxy resin based, double component, self-levelling, solvent free floor coating material with high chemical resistance and mechanical strength and finishes in a flat surface. Product Code: F.91125 Consumption: 1.50 kg/m² for 1 mm thickness. For self-levelling applications, the coating must be at least 1.25 mm thick. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Component A: RAL K7 Colors. Component B: Yellow or Light Yellow Liquid. Standard RAL K7 range excludes metallic and fluorescent colors and colors beginning with 4000. Package Contents: 25 kg (A+B) set Certification: CE, ISO Warranty: According to System		• Indoor, • Horizontal applications, • Hygienic environments, such as hospitals and laboratories, • Wine, beverage (except concentrated fruit syrup), meat, fish and similar food industries, • Medicine, dyestuff, paper, accumulator and fertilizer industries, • Laundries, industrial kitchens and dining halls, • Places exposed to heavy pedestrian traffic, such as shopping malls, terminals, • Places exposed to heavy vehicle traffic such as factories, warehouses and parkings, • Data processing and control centers.	Set	132,801 FCFA	149,181 FCFA
RepoX 520 Textured Epoxy Coating for Floors Epoxy resin based, double component, solvent-free, thixotropic floor coating material with an orange peel appearance (textured). Product Code: F.91225 Consumption: 450 - 600 g/m² in 1 coat for 280 - 375 µm dry-film thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Component A: RAL K7 Colors. Component B: Yellow or Light Yellow Liquid. Standard RAL K7 range excludes metallic and fluorescent colors and colors beginning with 4000. Package Contents: 25 kg (A+B) set Certification: CE, ISO Warranty: According to System		• Indoor, • Horizontal applications, in places where anti-slipness is required, • As a nonslip floor coating on ramps, • Places exposed to heavy vehicle traffic, such as factories, warehouses and parking garages, • Wine, beverage (except concentrated fruit syrup), meat, fish and similar food industries, • Medicine, dyestuff, paper, accumulator and fertilizer industries, • Laundries, industrial kitchens and dining halls, • Places exposed to heavy pedestrian traffic, such as shopping malls or terminals, • Data processing and control centers, • Airplane maintenance hangars.	Set	119,504 FCFA	135,884 FCFA
RepoX 550 Epoxy Paint and Coating Epoxy resin based, double component, solvent-free, durable and easy-to-clean paint and coating material with high surface hardness and high chemical, water and mechanical resistance. Product Code: F.91325 Consumption: 300 - 500 g/m² in 1 coat for 125 - 250 µm dry-film thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Component A: RAL K7 Colors. Component B: Yellow or Light Yellow Liquid. Standard RAL K7 range excludes metallic and fluorescent colors and colors beginning with 4000. Package Contents: 25 kg (A+B) set Certification: CE, ISO Warranty: According to System		• Indoor, • Concrete and metal surfaces, • As a paint on machinery, buildings and building parts made of metal, • Hygienic places such as hospitals and laboratories, • Water tanks, • Wine, beverage (except concentrated fruit syrup), meat, fish and similar food industries, • Laundries, industrial kitchens and dining halls, • Factories, warehouses and parking garages, • Data processing and control centers.	Set	146,098 FCFA	162,478 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
RepoX 552 Epoxy-based Paint and Coating Suitable for Potable Water Contact Epoxy resin based, double component, solvent-free, colored, easy to clean paint and coating material, highly resistant to chemical and mechanical effects, durable and suitable for contact with drinking water. Product Code: F.91725 Consumption: 300 - 500 g/m² in 1 coat for 125 - 250 µm dry-film thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Grey Package Contents: 25 kg (A+B) set Certification: CE, ISO Warranty: According to System		• Indoor, • Concrete and metal tanks, • Water tanks, • As a paint on metal machinery, buildings and buildings components, • Hygienic environments such as hospitals and laboratories, • Pharmaceutical, paint, paper and food industries, • Laundries, industrial kitchens and dining halls,	Set	129,476 FCFA	145,857 FCFA
RepoX 560WB Waterborne Epoxy Paint and Coating Epoxy resin based, double component, durable and easy-to-clean, waterborne paint and coating material with high chemical, moisture, water and mechanical resistance. Product Code: F.91625 Consumption: 150 - 250 g/m² per coat for 115 - 195 µm dry-film thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Limited RAL K7 color options. Component B: Transparent Liquid Package Contents: 25 kg (A+B) set Certification: CE, ISO Warranty: According to System		• Indoor, • In hygienic places such as hospitals and laboratories, • Water tanks, • Food industries, • Shopping malls, terminals and schools, • Factories, warehouses, tunnels and parking garages, • As a paint on walls with smooth surfaces.	Set	154,408 FCFA	170,788 FCFA
Polan 590 Polyurethane Flexible Self-levelling Coating Polyurethane based, double component, solvent-free, flexible, self-levelling floor coating material with mechanical strength. Product Code: F.96025 Consumption: 1.45 kg/m² for 1 mm dry-film thickness. Do not use less than 0.70 kg/m². Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Standard RAL colors, excluding metallic and fluorescent colors and colors beginning with 4000. Package Contents: 25 kg (A+B) set Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal applications, • Hygienic places such as hospitals and laboratories, • Food and medicine industries, • Swimming and decorative pools, • Places exposed to heavy vehicle and pedestrian traffic, such as shopping malls, factories, ateliers, warehouses, cold storage rooms.	Set	179,340 FCFA	195,720 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polan AF Polyurethane Aliphatic Top Coat Paint (UV Resistant) Polyurethane/aliphatic isocyanate based, double component, solventborne, UV resistant, glossy top coating which is resistant to scratching with high color stability and mechanical resistance. Product Code: F.96120 Consumption: 80 - 150 g/m² per coat for a maximum thickness of 80 µm. Apply at least 2 coats. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Standard glossy RAL colors, excluding metallic and fluorescent colors. Package Contents: 20 kg (A+B) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Concrete, steel and wooden surfaces, - Epoxy and polyurethane coverings, - Outer surfaces of vehicles such as tanks, tankers and concrete mixers, - As last coating in places open to atmospheric conditions where high UV resistance, color permanency and glossiness is required.	Set	190,011 FCFA	203,115 FCFA
Polan AFM Polyurethane Aliphatic Top Coat Paint Semi-matte Finish (UV Resistant) Polyurethane/aliphatic isocyanate based, double component, solventborne, mechanically resistant, UV resistant, semi-matte top coating with high color stability and resistance to scratching. Product Code: F.96224 Consumption: 90 - 150 g/m² per coat for a maximum thickness of 80 µm. Apply at least 2 coats. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Standard semi-matte RAL colors, excluding metallic and fluorescent colors. Package Contents: 24 kg (A+B) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Concrete, steel and wooden surfaces, - Epoxy and polyurethane coverings, - Floor coatings of sports fields, - Outer surfaces of vehicles such as tanks, tankers and concrete mixers, - Applications where glossiness is not required, - As last coating in places open to atmospheric conditions where high UV resistance, color permanency and semimatte finish looking is required.	Set	215,248 FCFA	230,973 FCFA
Duropaint Floor Paint Chlorine-rubber resin based, thixotropic, cold and thick applied marking and floor paint. Product Code: F.59025 Consumption: Approximately 250 g/m² per coat. Apply at least 2 coats. Consumption varies with surface absorption and roughness. Color / Color Options: Ral 9010 White, Ral 6002 Green, Ral 1023 Yellow, Ral 7001 Grey, Ral 5012 Blue and Ral 9005 Black Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Painting and marking parking garages, motorways (light traffic), pedestrian ways and curbsides, - Factory floors where chemical resistance is not required extensively, - Sport areas and playgrounds, - Hotels, laundries and service areas.	Package	149,349 FCFA	165,730 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Polyethylene Backer Rod Closed cell structured, polyethylene (PE) based backer rod, used in adjusting joint depth. Product Code: F.55006 Consumption: Varies with joint width. Select the rod diameter according to the required joint geometry. Color / Color Options: Grey Package Contents: 2,000 m per bag (Ø 6 mm) Certification: CE, ISO Warranty: According to System		• Supporting the filler chemical used in joint and dilatation isolation, • As joint filler in junctions of structural members such as doors and windows with the wall, • To provide proper movements of joints by adjusting the joint depth, • To prevent the filler chemical used in joints to bond to the floor and to offset the structure floor movement better.	Meter	20 FCFA	35 FCFA
FIXA Polyethylene Backer Rod Closed cell structured, polyethylene (PE) based backer rod, used in adjusting joint depth. Product Code: F.55008 Consumption: Varies with joint width. Select the rod diameter according to the required joint geometry. Color / Color Options: Grey Package Contents: 1,200 m per bag (Ø 8 mm) Certification: CE, ISO Warranty: According to System		• Supporting the filler chemical used in joint and dilatation isolation, • As joint filler in junctions of structural members such as doors and windows with the wall, • To provide proper movements of joints by adjusting the joint depth, • To prevent the filler chemical used in joints to bond to the floor and to offset the structure floor movement better.	Meter	34 FCFA	59 FCFA
FIXA Polyethylene Backer Rod Closed cell structured, polyethylene (PE) based backer rod, used in adjusting joint depth. Product Code: F.55010 Consumption: Varies with joint width. Select the rod diameter according to the required joint geometry. Color / Color Options: Grey Package Contents: 1,000 m per bag (Ø 10 mm) Certification: CE, ISO Warranty: According to System		• Supporting the filler chemical used in joint and dilatation isolation, • As joint filler in junctions of structural members such as doors and windows with the wall, • To provide proper movements of joints by adjusting the joint depth, • To prevent the filler chemical used in joints to bond to the floor and to offset the structure floor movement better.	Meter	41 FCFA	81 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Polyethylene Backer Rod Closed cell structured, polyethylene (PE) based backer rod, used in adjusting joint depth. Product Code: F.55020 Consumption: Varies with joint width. Select the rod diameter according to the required joint geometry. Color / Color Options: Grey Package Contents: 270 m per bag (Ø 20 mm) Certification: CE, ISO Warranty: According to System		• Supporting the filler chemical used in joint and dilatation isolation, • As joint filler in junctions of structural members such as doors and windows with the wall, • To provide proper movements of joints by adjusting the joint depth, • To prevent the filler chemical used in joints to bond to the floor and to offset the structure floor movement better.	Meter	155 FCFA	323 FCFA
FIXA Polyethylene Backer Rod Closed cell structured, polyethylene (PE) based backer rod, used in adjusting joint depth. Product Code: F.55030 Consumption: Varies with joint width. Select the rod diameter according to the required joint geometry. Color / Color Options: Grey Package Contents: 120 m per bag (Ø 30 mm) Certification: CE, ISO Warranty: According to System		• Supporting the filler chemical used in joint and dilatation isolation, • As joint filler in junctions of structural members such as doors and windows with the wall, • To provide proper movements of joints by adjusting the joint depth, • To prevent the filler chemical used in joints to bond to the floor and to offset the structure floor movement better.	Meter	347 FCFA	726 FCFA
Polimix Polypropylene Fiber Polypropylene based fiber, resistant to acids and alkaline, produced especially for concrete and mortars to reduce the cracking of concrete. Product Code: F.55106 Consumption: 600 - 900 g per m³ of concrete, depending on the application. Color / Color Options: Transparent White Fibre Package Contents: 600 g water-soluble bag Certification: CE, ISO Warranty: According to System		Field Concrete: • Industrial floors, parking garages, hangar floors, airports, • Machinery foundations exposed to abrasion, • Water tanks, swimming pool concrete, • Thin floorings. Mortars: • All types of plaster, repair and isolation purposed mortars. Precast Elements: • Concrete pipe manufacturing, • All types of precast elements. Shotcrete: • All types of spray concrete applications.	Package	5,030 FCFA	5,423 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polimix Polypropylene Fiber Polypropylene based fiber, resistant to acids and alkaline, produced especially for concrete and mortars to reduce the cracking of concrete. Product Code: F.55109 Consumption: 600 - 900 g per m³ of concrete, depending on the application. Color / Color Options: Transparent White Fibre Package Contents: 900 g water-soluble bag Certification: CE, ISO Warranty: According to System		Field Concrete: • Industrial floors, parking garages, hangar floors, airports, • Machinery foundations exposed to abrasion, • Water tanks, swimming pool concrete, • Thin floorings. Mortars: • All types of plaster, repair and isolation purposed mortars. Precast Elements: • Concrete pipe manufacturing, • All types of precast elements. Shotcrete: • All types of spray concrete applications.	Package	8,484 FCFA	9,074 FCFA
Steelmix Steel Wire for Concrete Reinforcement Low-carbon steel wire, produced by cold drawing method, especially for concrete, which provides high flexural and impact strength in concrete. Product Code: F.55225 Consumption: 10 - 45 kg per m³ of concrete, depending on the application. Color / Color Options: Grey Steel Wire Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• All types of open and closed field floor concrete, • Prefabricated elements, concrete pipes, • Shotcrete applications, • Anti-seismic structures.	Package	62,992 FCFA	79,372 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



2026 Retail Price List - Concrete & Mortar Additives

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Aquaplug Waterproofing Mortar and Screed Admixture Mortar and screed admixture that allows ease of application by increasing waterproofing and workability of plaster and floor screeds. Product Code: F.40130 Consumption: 0.50 - 1.00 kg per 50 kg of cement. Color / Color Options: Yellow Liquid Package Contents: 30 kg Certification: CE, ISO Warranty: According to System		• Tunnels and channels, • Water tanks, • Indoor and outdoor plaster, • Concrete blocks, • Swimming pools, • Floor screeds.	Package	26,991 FCFA	61,679 FCFA
Aquaplug Waterproofing Mortar and Screed Admixture Mortar and screed admixture that allows ease of application by increasing waterproofing and workability of plaster and floor screeds. Product Code: F.40180 Consumption: 0.50 - 1.00 kg per 50 kg of cement. Color / Color Options: Yellow Liquid Package Contents: 180 kg Certification: CE, ISO Warranty: According to System		• Tunnels and channels, • Water tanks, • Indoor and outdoor plaster, • Concrete blocks, • Swimming pools, • Floor screeds.	Package	160,856 FCFA	368,981 FCFA
Aqualatex Mortar and Screed Admixture with Waterproofing and Bonding Properties Multi-purpose, liquid synthetic rubber emulsion which increase the adherence and waterproofing properties of the cement based mortars. Product Code: F.40330 Consumption: Consumption: Application-dependent; Aqualatex/water ratio: 1:1 to 1:4; cement/sand ratio: 1:1 to 1:3. See the technical data sheet for the exact mixing ratio. Color / Color Options: White Liquid Package Contents: 30 kg Certification: CE, ISO Warranty: According to System		• Concrete repairs, • Plasters, • Coverings resistant to abrasion, • Increase adherence between old and new concrete, • Ceramic adhesive mortars, • Places that require waterproofing, • To prevent reinforcement corrosion, • Sheet iron, zinc and PVC eaves, chimney flashings for waterproofing.	Package	81,569 FCFA	116,256 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Aqualatex Mortar and Screed Admixture with Waterproofing and Bonding Properties Multi-purpose, liquid synthetic rubber emulsion which increase the adherence and waterproofing properties of the cement based mortars. Product Code: F.40380 Consumption: Consumption: Application-dependent; Aqualatex/water ratio: 1:1 to 1:4; cement/sand ratio: 1:1 to 1:3. See the technical data sheet for the exact mixing ratio. Color / Color Options: White Liquid Package Contents: 180 kg Certification: CE, ISO Warranty: According to System		• Concrete repairs, • Plasters, • Coverings resistant to abrasion, • Increase adherence between old and new concrete, • Ceramic adhesive mortars, • Places that require waterproofing, • To prevent reinforcement corrosion, • Sheet iron, zinc and PVC eaves, chimney flashings for waterproofing.	Package	485,058 FCFA	693,183 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



2026 Retail Price List - Mould & Curing

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polyform 100 Wooden Mold Release Agent High quality, ready-to-use mold release agent that allows the mold to be separated easily from the concrete. Contains a special emulsifier blend and provides a smooth and a spotless surface. Product Code: F.56130 Consumption: Depending on the mould type, 1 L covers approximately 19 - 29 m² by roller or 38 - 58 m² by pressurized spray. Color / Color Options: Cream-White Emulsion Package Contents: 30 L Certification: CE, ISO Warranty: According to System		• Conventional wooden mold systems, • All kinds of mold surfaces, especially absorbent ones.	Package	40,588 FCFA	75,275 FCFA
Polyform 100 Wooden Mold Release Agent High quality, ready-to-use mold release agent that allows the mold to be separated easily from the concrete. Contains a special emulsifier blend and provides a smooth and a spotless surface. Product Code: F.56180 Consumption: Depending on the mould type, 1 L covers approximately 19 - 29 m² by roller or 38 - 58 m² by pressurized spray. Color / Color Options: Cream-White Emulsion Package Contents: 210 L Certification: CE, ISO Warranty: According to System		• Conventional wooden mold systems, • All kinds of mold surfaces, especially absorbent ones.	Package	281,571 FCFA	524,384 FCFA
Polyform 300 General Purpose Plywood, Wooden Mold Release Agent Chemical emulsion based, high quality, ready-to-use, general purpose mold release agent that allows the mold to be separated easily from the concrete. Contains a special emulsifier blend and provides a smooth and spotless surface. Product Code: F.56230 Consumption: Depending on the mould type, 1 L covers approximately 19 - 28 m² by roller or 37 - 56 m² by pressurized spray. Color / Color Options: Cream-White Emulsion Package Contents: 30 L Certification: CE, ISO Warranty: According to System		All kinds of plywood, plastic and similar molds, • Conventional wooden mold systems, • Wooden mold systems with metal accessories, • All kinds of mold surfaces, especially absorbent ones, • Detailed concrete molds systems, with low temperature curing and large surface areas.	Package	49,584 FCFA	80,803 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polyform 300 General Purpose Plywood, Wooden Mold Release Agent Chemical emulsion based, high quality, ready-to-use, general purpose mold release agent that allows the mold to be separated easily from the concrete. Contains a special emulsifier blend and provides a smooth and spotless surface. Product Code: F.56280 Consumption: Depending on the mould type, 1 L covers approximately 19 - 28 m² by roller or 37 - 56 m² by pressurized spray. Color / Color Options: Cream-White Emulsion Package Contents: 210 L Certification: CE, ISO Warranty: According to System		All kinds of plywood, plastic and similar molds, • Conventional wooden mold systems, • Wooden mold systems with metal accessories, • All kinds of mold surfaces, especially absorbent ones, • Detailed concrete molds systems, with low temperature curing and large surface areas.	Package	345,815 FCFA	564,346 FCFA
Polyform Steel Steel, Tunnel Mold Release Agent High quality, ready-to-use mold release agent that allows the mold to be separated easily from the concrete by preventing the adhesion between the fresh concrete and the mold. Resistant to steam cure. Provides a smooth and spotless surface. Especially developed for effective results in large surface concrete molds. Product Code: F.56430 Consumption: Depending on the mould type, 1 L covers approximately 17 - 26 m² by roller or 35 - 43 m² by pressurized spray. Color / Color Options: Dark Brown Liquid Package Contents: 30 L Certification: CE, ISO Warranty: According to System		• Especially for tunnel-steel mold systems which are heated and applied steam curing, • Smooth molds with low absorption, • Plywood mold systems, • Polyester mold systems, • Precast and sliding mold surfaces, • Large surface concrete molds with details.	Package	83,310 FCFA	114,528 FCFA
Polyform Steel Steel, Tunnel Mold Release Agent High quality, ready-to-use mold release agent that allows the mold to be separated easily from the concrete by preventing the adhesion between the fresh concrete and the mold. Resistant to steam cure. Provides a smooth and spotless surface. Especially developed for effective results in large surface concrete molds. Product Code: F.56480 Consumption: Depending on the mould type, 1 L covers approximately 17 - 26 m² by roller or 35 - 43 m² by pressurized spray. Color / Color Options: Dark Brown Liquid Package Contents: 210 L Certification: CE, ISO Warranty: According to System		• Especially for tunnel-steel mold systems which are heated and applied steam curing, • Smooth molds with low absorption, • Plywood mold systems, • Polyester mold systems, • Precast and sliding mold surfaces, • Large surface concrete molds with details.	Package	580,626 FCFA	799,157 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Kurfix 200 Acrylic Based, Waterborne Curing Compound Acrylic emulsion based, white colored and waterborne liquid curing compound that prevents quick loss of water from the concrete. Product Code: F.53230 Consumption: 200 - 300 g/m². Consumption varies with concrete absorption and roughness. Color / Color Options: White Liquid Package Contents: 30 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • All vertical and horizontal concrete surfaces, • Right after fresh concrete and surface hardener applications, • Concrete applications where the air flow and evaporation is high and the moisture is low, • Airport and field concrete, • Concrete roads and bridges, • Canals.	Package	35,148 FCFA	69,835 FCFA
Kurfix 200 Acrylic Based, Waterborne Curing Compound Acrylic emulsion based, white colored and waterborne liquid curing compound that prevents quick loss of water from the concrete. Product Code: F.53280 Consumption: 200 - 300 g/m². Consumption varies with concrete absorption and roughness. Color / Color Options: White Liquid Package Contents: 180 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • All vertical and horizontal concrete surfaces, • Right after fresh concrete and surface hardener applications, • Concrete applications where the air flow and evaporation is high and the moisture is low, • Airport and field concrete, • Concrete roads and bridges, • Canals.	Package	208,709 FCFA	416,834 FCFA
Kurfix 300 Solvent Based Curing Compound Transparent amber-yellow, hydrocarbon resin based, solventborne liquid curing compound that prevents quick loss of water from the concrete. Forms a film layer which reduces shrinkage cracks on the surface by preventing the water inside the fresh concrete from evaporating. Product Code: F.53330 Consumption: 150 - 180 g/m². Consumption varies with concrete absorption and roughness. Color / Color Options: Transparent Amber-Yellow Liquid Package Contents: 30 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • All vertical and horizontal concrete surfaces, • Right after fresh concrete and surface hardener applications, • Concrete applications where the air flow and evaporation is high and the moisture is low, • Surfaces which will later be covered with paint, ceramics, epoxy etc. • Airport and field concrete, • Concrete roads and bridges, • Canals and dams, • Retaining walls.	Package	142,364 FCFA	177,051 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Kurfix 300 Solvent Based Curing Compound Transparent amber-yellow, hydrocarbon resin based, solventborne liquid curing compound that prevents quick loss of water from the concrete. Forms a film layer which reduces shrinkage cracks on the surface by preventing the water inside the fresh concrete from evaporating. Product Code: F.53380 Consumption: 150 - 180 g/m². Consumption varies with concrete absorption and roughness. Color / Color Options: Transparent Amber-Yellow Liquid Package Contents: 180 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • All vertical and horizontal concrete surfaces, • Right after fresh concrete and surface hardener applications, • Concrete applications where the air flow and evaporation is high and the moisture is low, • Surfaces which will later be covered with paint, ceramics, epoxy etc. • Airport and field concrete, • Concrete roads and bridges, • Canals and dams, • Retaining walls.	Package	843,774 FCFA	1,051,899 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



2026 Retail Price List - Plaster & Masonry Mortars

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Betoprimer Primer for Exposed Concrete Surfaces Acrylic polymer based, single component plaster primer with quartz granular for exposed concrete surfaces to increase the adherence of the surface and workability time, applied before cement or gypsum based plasters. Product Code: F.31112.60 Consumption: 150 - 250 g/m². Consumption varies with surface absorption and roughness. Color / Color Options: Green Acrylic Dispersion Package Contents: 12 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal - vertical applications and ceilings, - To increase adherence on exposed concrete surfaces, prior to application of cement or gypsum based plaster mortars, - To protect water absorbent surfaces such as gypsumplaster, gypsum-plywood, gas concrete, chipboard, briquette from moisture, - To increase adherence prior to plaster application on ceilings, - To increase adherence before applications on old surfaces.	Package	14,785 FCFA	28,660 FCFA
Primex Primer for Exposed Concrete and Gypsum Based Plaster Acrylic polymer based, single component economical plaster primer with quartz granular for exposed concrete surfaces to increase the adherence of the surface and workability time, applied before cement or gypsum based plasters. Product Code: F.31515.43 Consumption: 150 - 250 g/m². Consumption varies with surface absorption and roughness. Color / Color Options: Dusty Rose-Pink Acrylic Dispersion Package Contents: 15 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal - vertical applications and ceilings, - To increase adherence on concrete surfaces, prior to application of cement or gypsum based plaster mortars, - To protect water absorbent surfaces such as gypsumplaster, gypsum-plywood, gas concrete, chipboard, briquette from moisture, - To increase adherence prior to plaster application on ceilings, - To increase adherence before applications on old surfaces.	Package	15,217 FCFA	32,561 FCFA
Perfix Insulation Plaster with Perlite (White) White cement based insulation plaster with perlite with increased thermal and sound insulation properties, made with special particle-sized fillers and performance increasing chemicals. Product Code: F.73035.01 Consumption: 13 kg/m² for 1 cm thickness. Consumption varies with the application surface. Color / Color Options: White Powder Package Contents: 35 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Ceilings and vertical surfaces, - Surfaces such as coarse plaster, gas concrete, brick, pumice and briquette, - Plastering the load bearing system components such as columns, beams, shear walls.	Package	11,103 FCFA	21,895 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Ready-Mixed Hand Plaster (Coarse) White White cement based, single component, ready-mixed coarse plaster with chemical and fiber additives, applied manually. Product Code: F.73140.01 Consumption: 14 - 16 kg/m² for 1 cm thickness. Color / Color Options: White Powder Package Contents: 40 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Wall and ceiling, - Surfaces such as brick, gas concrete, concrete, exposed concrete, pumice and briquette.	Package	12,085 FCFA	24,418 FCFA
FIXA Ready-Mixed Machine Applied Fiber Supported Plaster (Coarse) White White cement based, single component, ready-to-use coarse plaster with chemical and fiber additives, applied with machine or manually. Product Code: F.73540.01 Consumption: 13 - 15 kg/m² for 1 cm thickness. Color / Color Options: White Powder Package Contents: 40 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Wall and ceiling, - Surfaces such as brick, gas concrete, concrete, exposed concrete, pumice and briquette.	Package	12,109 FCFA	24,442 FCFA
FIXA Ready-Mixed Hand Plaster (Fine) - White White cement based, single component, ready-mixed fine plaster with chemical additives, applied manually or by machine. Product Code: F.73240.01 Consumption: 1.40 - 1.70 kg/m² for 1 mm thickness. Color / Color Options: White Powder Package Contents: 40 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Wall and ceiling, - To obtain a flat surface prior to paint and decorative coverings on surfaces such as coarse plaster, concrete and exposed concrete.	Package	12,544 FCFA	24,877 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Cement Based Thin Satin Putty White White cement based, single component, thin satin putty with chemical additives which covers all surface imperfections and prepares the surface to paint. Product Code: F.73320.01 Consumption: Approximately 1.00 kg/m² for 1 mm thickness. Color / Color Options: White Powder Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Wall and ceiling, • Coarse plaster, fine plaster and concrete surfaces, • Repairing fine cracks on the surface, • As the top coat fine finishing plaster in order to have a smooth surface before painting.	Package	7,904 FCFA	14,071 FCFA
FIXA Pumice - Brick Bonding Mortar Cement based, single component, polymer added adhesive mortar with high adhesion properties for pumice and brick. Product Code: F.11425 Consumption: Consumption: Min. 4.5 kg/m²; Max. 13.5 kg/m². See the technical data sheet for exact consumption. Color / Color Options: Grey Granules Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Masonry works with pumice blocks, concrete blocks, and bricks.	Package	6,888 FCFA	14,597 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



2026 Retail Price List - Ceramic Adhesives

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Tile and Ceramic Adhesive Mortar C1T Cement based, single component powder mortar with reduced slip, used for bonding tiles and ceramics. Product Code: F.10125 Consumption: 3.5 - 4.0 kg/m². Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor, - Horizontal and vertical surfaces, - Bonding small and medium size floor and wall ceramics with more than 3% water absorption rate, - Covering materials with a maximum size of 33 x 33 cm.	Package	7,178 FCFA	10,985 FCFA
FIXA Tile and Ceramic Adhesive Mortar (White) C1T White cement based, single component powder mortar with reduced slip, used for bonding tiles and ceramics. Product Code: F.10125.01 Consumption: 3.5 - 4.0 kg/m². Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor, - Horizontal and vertical surfaces, - Bonding small and medium size floor and wall ceramics with more than 3% water absorption rate, - Covering materials with a maximum size of 33 x 33 cm.	Package	8,205 FCFA	13,344 FCFA
FIXA Extra Tile and Ceramic Adhesive Mortar C1TE Cement based, single component, polymer added, extra featured powder mortar with reduced slip and long working time, used for bonding tiles and ceramics. Product Code: F.10225 Consumption: 3.5 - 4.0 kg/m². Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Bonding small and medium size floor and wall ceramics and similar materials with more than 3% water absorption rate.	Package	7,601 FCFA	11,362 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Extra Tile and Ceramic Adhesive Mortar (White) C1TE (White) White cement based, single component, polymer added, extra featured powder mortar with reduced slip and long working time, used for bonding tiles and ceramics. Product Code: F.10225.01 Consumption: 3.5 - 4.0 kg/m². Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor • Horizontal and vertical surfaces • Bonding small and medium size floor and wall ceramics, mosaic and similar materials with more than 3% water absorption rate.	Package	8,749 FCFA	13,888 FCFA
FIXA Flexup Tile and Ceramic Adhesive Mortar C1TE Cement based, single component, polymer added, high performance powder mortar with reduced slip and long working time, used for bonding covering materials such as granite and ceramics. Product Code: F.10325 Consumption: 3.0 - 4.0 kg/m². Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical surfaces, • Bonding covering materials such as medium and large size floor and wall ceramics, granite, granite ceramics, marble, clinker, mosaics, decorative brick, natural stone, travertine on concrete, plaster and screed surfaces in wet areas such as bathrooms and kitchens.	Package	7,842 FCFA	11,578 FCFA
FIXA Flexup Tile and Ceramic Adhesive Mortar (White) C1TE White cement based, single component, polymer added, high performance powder mortar with reduced slip and long working time, used for bonding covering materials such as granite and ceramics. Product Code: F.10325.01 Consumption: 3.0 - 4.0 kg/m². Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical surfaces, • Bonding covering materials such as medium and large size floor and wall ceramics, granite, granite ceramics, marble, clinker, mosaics, decorative brick, natural stone, travertine on concrete, plaster and screed surfaces in wet areas such as bathrooms and kitchens.	Package	9,505 FCFA	14,643 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Fast Setting Tile and Ceramic Adhesive Mortar C1FT Cement based, single component, polymer added, fast setting, high performance and stability powder adhesive mortar with reduced slip (C1FT). Product Code: F.11825 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical surfaces, • Places required to be ready for use within 24 hours, • Bonding small and medium size floor and wall ceramics and all kinds of natural stone coverings, • Places exposed to heavy pedestrian traffic such as work places, shopping malls, schools and hospitals, • Floor heating systems, • Bonding ceramics on old granite and marble surfaces.	Package	10,260 FCFA	13,734 FCFA
FIXA Fast Setting Tile and Ceramic Adhesive Mortar (White) C1FT White cement based, single component, polymer added, fast setting, high performance and stability powder adhesive mortar with reduced slip (C1FT). Product Code: F.11825.01 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical surfaces, • Places required to be ready for use within 24 hours, • Bonding small and medium size floor and wall ceramics and all kinds of natural stone coverings, • Places exposed to heavy pedestrian traffic such as work places, shopping malls, schools and hospitals, • Floor heating systems, • Bonding ceramics on old granite and marble surfaces.	Package	12,073 FCFA	17,212 FCFA
FIXA Granite Ceramic Adhesive Mortar C2T Cement based, single component, polymer added, flexible, high performance and stability powder adhesive mortar with reduced slip. Product Code: F.10425 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical surfaces, • Bonding large size floor and wall ceramic, granite, granite ceramic, marble, clinker and all kinds of natural stone coverings, • Places exposed to heavy pedestrian traffic such as work places, shopping malls, schools and hospitals, • Bonding ceramics on old granite and marble surfaces.	Package	8,447 FCFA	12,117 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Granite Ceramic Adhesive Mortar (White) C2T White cement based, single component, polymer added, flexible, high performance and stability powder adhesive mortar with reduced slip. Product Code: F.10425.01 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Bonding large size floor and wall ceramic, granite, granite ceramic, marble, clinker and all kinds of natural stone coverings, - Places exposed to heavy pedestrian traffic such as work places, shopping malls, schools and hospitals, - Bonding ceramics on old granite and marble surfaces.	Package	9,505 FCFA	14,643 FCFA
FIXA Flex Granite Ceramic Adhesive Mortar C2TE Cement based, single component, polymer added, very flexible high performance and stability powder mortar with reduced slip and long working time. Product Code: F.10525 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Bonding large size floor and wall ceramics, granite, granite ceramic, marble, clinker and all kinds of natural stone coverings, - Places exposed to heavy pedestrian traffic, such as work places, shopping malls, schools and hospitals, - Floor heating systems, - Bonding ceramics on old granite and marble surfaces.	Package	8,749 FCFA	12,387 FCFA
FIXA Flex Granite Ceramic Adhesive Mortar (White) C2TE White cement based, single component, polymer added, very flexible high performance and stability powder mortar with reduced slip and long working time. Product Code: F.10525.01 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Bonding large size floor and wall ceramics, granite, granite ceramic, marble, clinker and all kinds of natural stone coverings, - Places exposed to heavy pedestrian traffic, such as work places, shopping malls, schools and hospitals, - Floor heating systems, - Bonding ceramics on old granite and marble surfaces, - Bonding glass mosaics.	Package	9,882 FCFA	15,021 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Highflex Granite Ceramic Adhesive Mortar C2TES1 Cement based, single component, polymer added, S1 class very flexible high performance and stability powder mortar with reduced slip and long working time. Product Code: F.10625 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Bonding large size floor and wall ceramics, granite, granite ceramic, marble, clinker and all kinds of natural stone coverings, - Places exposed to heavy pedestrian traffic, such as work places, shopping malls, schools and hospitals, - Places exposed to temperature changes, such as cold storage depots, flash freezing facilities and floor heating systems, - Places exposed to water and outdoor weather conditions, such as pools, water tanks, terraces and balconies, - Bonding ceramics on old granite and marble surfaces.	Package	10,487 FCFA	13,936 FCFA
Highflex Granite Ceramic Adhesive Mortar (White) C2TES1 White cement based, single component, polymer added, S1 class very flexible high performance and stability powder mortar with reduced slip and long working time. Product Code: F.10625.01 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Bonding large size floor and wall ceramics, granite, granite ceramic, marble, clinker, glass mosaic and all kinds of natural stone coverings, - Places exposed to heavy pedestrian traffic, such as work places, shopping malls, schools and hospitals, - Places exposed to temperature changes, such as cold storage depots, flash freezing facilities and floor heating systems, - Places exposed to water and outdoor weather conditions, such as pools, water tanks, terraces and balconies, - Bonding ceramics on old granite and marble surfaces.	Package	11,922 FCFA	17,061 FCFA
Highflex Pro Granite Ceramic Adhesive Mortar C2TES2 Cement based, single component, polymer added, S2 class very flexible high performance and stability powder mortar with reduced slip and long working time, with superior qualities. Product Code: F.11325 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Bonding large size floor and wall ceramics, granite, granite ceramic, marble, clinker and all kinds of natural stone coverings, - Places exposed to heavy pedestrian traffic, such as work places, shopping malls, schools and hospitals, - Places exposed to temperature changes, such as cold storage depots, flash freezing facilities and floor heating systems, - Places exposed to water and outdoor weather conditions, such as pools, water tanks, terraces and balconies, - Bonding ceramics on old granite and marble surfaces.	Package	13,131 FCFA	16,295 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Highflex Pro Granite Ceramic Adhesive Mortar (White) C2TES2 White cement based, single component, polymer added, S2 class very flexible high performance and stability powder mortar with reduced slip and long working time, with superior qualities. Product Code: F.11325.01 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Bonding large size floor and wall ceramics, granite, granite ceramic, marble, clinker, glass mosaic and all kinds of natural stone coverings, - Places exposed to heavy pedestrian traffic, such as work places, shopping malls, schools and hospitals, - Places exposed to temperature changes, such as cold storage depots, flash freezing facilities and floor heating systems, - Places exposed to water and outdoor weather conditions, such as pools, water tanks, terraces and balconies, - Bonding ceramics on old granite and marble surfaces.	Package	13,962 FCFA	19,101 FCFA
Highflex Fluid Granite Ceramic Adhesive Mortar C2ES1 Cement based, single component, polymer added, S1 class very flexible, high performance and stability powder mortar with reduced slip and long working time which is easy to apply thanks to its fluidity. Product Code: F.11225 Consumption: 2.0 - 4.0 kg/m². Consumption varies with the application surface and trowel notch size. Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal surfaces; concrete, screed or cement-bonded particle boards and insulation panels such as stone wool, expanded and extruded, - Bonding large size floor tiles, granite, granite ceramic, marble, clinker, decorative bricks, glass mosaics, terra cotta and all kinds of natural stone coverings, - Places exposed to heavy pedestrian traffic, such as work places, shopping malls, schools and hospitals, - Industrial places exposed to heavy loads such as factories or plants, - Places exposed to temperature changes, such as cold storage depots, flash freezing facilities and floor heating systems, - Places exposed to water and outdoor weather conditions, such as pools, water tanks, terraces and balconies, - Bonding ceramics on old granite and marble surfaces.	Package	13,282 FCFA	16,430 FCFA
FIXA Flex Granite Ceramic Adhesive Mortar (Double Component) C2TES1 Double component, very strong and flexible adhesive with reduced slip and long working time. Component A is a cement based, polymer added powder mortar, component B is a very flexible polymer emulsion. Product Code: F.10525 + 10606 Consumption: 5.5 - 6.5 kg/m². Color / Color Options: Component A: Grey Powder Component B: White Liquid Package Contents: 31 kg (25 kg + 6 kg) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Bonding large size floor and wall ceramic, granite, granite ceramic, marble, clinker and all kinds of natural stone coverings, - Places exposed to heavy pedestrian traffic such as work places, shopping malls, schools and hospitals, - Floor heating systems, - Bonding ceramics on old granite and marble surfaces, - Bonding ceramics on gypsumboard, - Bonding covering materials such as ceramics, granite ceramic, marble up to 30 m height on facades of buildings. Mechanical fixing should be done if necessary.	Set	25,862 FCFA	32,234 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Fast Setting Granite Ceramic Adhesive Mortar C2FT Cement based, single component, polymer added, fast setting, high performance and stability powder adhesive mortar with reduced slip (C2FT). Product Code: F.10725 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical surfaces, • Places required to be ready for use within 24 hours, • Bonding small and medium size floor and wall ceramics and all kinds of natural stone coverings, • Places exposed to heavy pedestrian traffic such as work places, shopping malls, schools and hospitals, • Floor heating systems, • Bonding ceramics on old granite and marble surfaces.	Package	11,167 FCFA	14,543 FCFA
FIXA Fast Setting Granite Ceramic Adhesive Mortar (White) C2FT White cement based, single component, polymer added, fast setting, high performance and stability powder adhesive mortar with reduced slip (C2FT). Product Code: F.10725.01 Consumption: 4.0 - 6.0 kg/m². Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical surfaces, • Places required to be ready for use within 24 hours, • Bonding small and medium size floor and wall ceramics and all kinds of natural stone coverings, • Places exposed to heavy pedestrian traffic such as work places, shopping malls, schools and hospitals, • Floor heating systems, • Bonding ceramics on old granite and marble surfaces.	Package	12,300 FCFA	17,439 FCFA
FIXA Pool and Wet Floor Adhesive Mortar C2TES1 Cement based, single component, polymer added, S1 class, very flexible, high performance adhesive mortar with extended open time, reduced slip and very long working time. Product Code: F.11125 Consumption: 3.5 - 4.0 kg/m². Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical surfaces, • Wet areas such as pools, water tanks, sauna, Turkish baths, • Bonding covering materials such as ceramics and glass mosaic on surfaces such as concrete, plaster and screed.	Package	10,184 FCFA	15,323 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Pool and Wet Floor Adhesive Mortar (White) C2TES1 White cement based, single component, polymer added, S1 class, very flexible, high performance adhesive mortar with extended open time, reduced slip and very long working time. Product Code: F.11125.01 Consumption: 3.5 - 4.0 kg/m². Color / Color Options: White Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Wet areas such as pools, water tanks, sauna, Turkish baths, - Bonding covering materials such as ceramics and glass mosaic on surfaces such as concrete, plaster and screed.	Package	11,771 FCFA	16,910 FCFA
FIXA Natural Stone and Brick Adhesive Mortar Cement based, single component, polymer added, flexible, thick bed adhesive mortar with reduced slip and high performance and stability. Product Code: F.11025 Consumption: Varies with the application surface. Color / Color Options: Grey Powder Package Contents: 25 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical surfaces, - Bonding covering materials such as natural stone, granite, marble, brick or bigger sized ceramics, - Bonding floor coverings on imperfect surfaces without combing.	Package	8,447 FCFA	13,586 FCFA
Akrilan 200 Ready to Use Paste Type Tile Adhesive D2TE Acrylic dispersion based, ready-to-use, high performance paste type tile adhesive with extended open time and reduced slip. Product Code: F.12015 Consumption: 1.70 kg/m² for 1 mm thickness. Color / Color Options: White Acrylic Dispersion Package Contents: 15 kg Certification: CE, ISO Warranty: According to System		- Indoor, - Vertical surfaces, - Bonding ceramic, tiles and glass mosaics, - Bonding ceramic on painted surfaces, gypsum board, gypsum-plaster, cement-bonded particle boards, hardwood, - Bonding ceramic on old coverings.	Package	14,134 FCFA	31,478 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
RepoX 100 Epoxy Based Marble and Granite Adhesive R2TE Epoxy resin based, double component, easy-to-apply, ready-to-use epoxy adhesive mortar with extended open time and reduced slip, and high bonding strength. Resistant to chemicals and bacteria, can be cleaned with water. Product Code: F.13005 Consumption: 1.70 kg/m² for 1 mm thickness. Consumption varies with surface absorption and roughness and the application method. Color / Color Options: Component A: Grey Thixotropic Liquid Component B: Yellow Liquid Package Contents: 5.4 kg (A+B) set Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Hospitals and all kinds of hygienic environments, - Swimming pools, thermal pools and wet areas, - Cheese, milk, wine, meat, fish and similar food industries, - Medicine, dyestuff, paper, accumulator and fertilizer industries, - Printing house, laundries, industrial kitchens and dining halls, - Places exposed to heavy pedestrian traffic such as shopping malls, terminals, - Floor heating systems, - Waste water and treatment facilities, - Bonding materials such as ceramic, tiles, marble, granite, ceramic resistant to acids, porcelain ceramic, glass mosaic and glass brick to be used in places listed above, on surfaces such as concrete, plaster and metals.	Set	27,837 FCFA	34,081 FCFA
Adhera Adherence Improving Primer Acrylic dispersion based, single component, viscous primer with high adhesive properties for increasing adherence and balancing the absorption of the surface before covering ceramics on vertical and glassy surfaces or on ceramics. Product Code: F.31305 Consumption: 300 - 500 g/m². Consumption varies with surface absorption and roughness. Color / Color Options: Dusty Rose Acrylic Dispersion Package Contents: 5 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Before bonding ceramic on ceramics, - On sound and painted (polyurethane, epoxy and acrylic) surfaces with cement based plasters and screeds, - To increase adherence and balance water requirements of the surface before covering wooden and parquet surfaces.	Package	6,767 FCFA	12,548 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



2026 Retail Price List - Ceramic Grouts

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Tile Grout CG1 (1 - 6 mm) Cement based, high performance, single component, easy-to-apply tile grout which forms smooth surface for 1 - 6 mm joints. Product Code: F.20120 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: White Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		- Indoor, - Horizontal and vertical surfaces, - Tile grouting 1 - 6 mm joints of ceramic, tiles and similar covering materials.	Package	9,355 FCFA	17,063 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: White Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Places such as pools, water tanks, sauna and Turkish baths, - Floor heating systems, - Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	9,778 FCFA	17,486 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.10 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Light Grey Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Places such as pools, water tanks, sauna and Turkish baths, - Floor heating systems, - Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	11,591 FCFA	19,299 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.40 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Bahama Beige Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	11,591 FCFA	19,299 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.70 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Ivory Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	11,591 FCFA	19,299 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.11 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Grey Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	12,510 FCFA	20,218 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.41 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Light Brown Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	12,510 FCFA	20,218 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.12 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Dark Grey Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	13,694 FCFA	21,403 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.42 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Chocolate Brown Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	13,694 FCFA	21,403 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.45 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Troy Beige Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Places such as pools, water tanks, sauna and Turkish baths, - Floor heating systems, - Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	13,694 FCFA	21,403 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.46 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Seljuk Beige Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Places such as pools, water tanks, sauna and Turkish baths, - Floor heating systems, - Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	13,694 FCFA	21,403 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.47 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Ottoman Beige Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Places such as pools, water tanks, sauna and Turkish baths, - Floor heating systems, - Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	13,694 FCFA	21,403 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.48 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Sandy Beige Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	13,694 FCFA	21,403 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.44 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Dark Brown Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	16,245 FCFA	23,953 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.74 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Hornbeam Brown Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	16,245 FCFA	23,953 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.75 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Maroon Brown Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	16,245 FCFA	23,953 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.99 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Black Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	16,245 FCFA	23,953 FCFA
FIXA Flex Tile Grout CG2WA (1 - 6 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout which forms smooth surfaces for 1 - 6 mm joints with reduced water absorption and high abrasion resistance. Product Code: F.20220.95 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Anthracite Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 1 - 6 mm joints of coverings such as granite ceramic, bigger sized ceramic, tile, natural granite, marble, clinker and glass mosaic.	Package	21,080 FCFA	28,788 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: White Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	9,778 FCFA	17,486 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.10 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Light Grey Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	11,591 FCFA	19,299 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.40 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Bahama Beige Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	11,591 FCFA	19,299 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.70 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Ivory Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	11,591 FCFA	19,299 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.11 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Grey Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	12,510 FCFA	20,218 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.41 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Light Brown Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	12,510 FCFA	20,218 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.12 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Dark Grey Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	13,694 FCFA	21,403 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.42 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Chocolate Brown Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	13,694 FCFA	21,403 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.45 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Troy Beige Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	13,694 FCFA	21,403 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.46 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Seljuk Beige Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	13,694 FCFA	21,403 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.47 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Ottoman Beige Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	13,694 FCFA	21,403 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.48 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Sandy Beige Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	13,694 FCFA	21,403 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.44 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Dark Brown Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	16,245 FCFA	23,953 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.74 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Hornbeam Brown Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	16,245 FCFA	23,953 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.75 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Maroon Brown Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Horizontal and vertical applications, • Places exposed to heavy pedestrian traffic, • Places such as pools, water tanks, sauna and Turkish baths, • Floor heating systems, • Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, • As glass brick adhesive.	Package	16,245 FCFA	23,953 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.99 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Black Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Places exposed to heavy pedestrian traffic, - Places such as pools, water tanks, sauna and Turkish baths, - Floor heating systems, - Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, - As glass brick adhesive.	Package	16,245 FCFA	23,953 FCFA
FIXA Flex Tile Grout CG2WA (6 - 20 mm) Cement based, high performance, single component, easy-to-apply, flexible tile grout for 6 - 20 mm joints with reduced water absorption and high abrasion resistance. Resistant to cracking. Product Code: F.20320.95 Consumption: Min. 130 g/m²; Max. 1,361 g/m². See the technical data sheet for exact consumption. Color / Color Options: Anthracite Package Contents: 20 kg Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Places exposed to heavy pedestrian traffic, - Places such as pools, water tanks, sauna and Turkish baths, - Floor heating systems, - Grouting 6 - 20 mm joints of coverings such as granite ceramic, bigger sized ceramic, natural granite, marble, terra cotta, clinker, pressed brick, natural stone, slate stone and glass mosaic, - As glass brick adhesive.	Package	21,080 FCFA	28,788 FCFA
RepoX 200 Epoxy Based Tile Grout Epoxy resin based, double component, easy-to-apply, ready-to-use, hygienic epoxy tile grout which is resistant to chemicals and bacteria. Has high bonding strength and can be wiped with water. Product Code: F.22005 Consumption: Min. 122 g/m²; Max. 1,285 g/m². See the technical data sheet for exact consumption. Color / Color Options: Available Epoxy Colors: White, Grey, Bahama Beige and Black Package Contents: 5.4 kg (A+B) kit Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Horizontal and vertical applications, - Hospitals and all kinds of hygienic environments, - Swimming pools, thermal pools and wet areas, - Cheese, milk, wine, beverage, meat, fish and similar food industries, - Medicine, dyestuff, paper, accumulator and fertilizer industries, - Printing houses, laundries, industrial kitchens and dining halls, - Places exposed to heavy pedestrian traffic, such as shopping malls, terminals, - Waste water and purification facilities, - Grouting joints of materials such as ceramic, tile, marble, granite, ceramic resistant to acids, porcelain ceramic, glass mosaic and glass brick to be used in places listed above.	Set	28,227 FCFA	34,471 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngoussou, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



2026 Retail Price List - Technical Adhesives

Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polymera MS 950 MS Polymer Based Multi-purpose Elastic Adhesive MS Polymer based, single component, elastic, solvent and isocyanate free, hybrid construction sealant and adhesive. Product Code: F.80950 Adhesive use: varies with the application surface and load. Sealant use per 1 running metre: 6 × 6 mm joint = 36 ml / 55.8 g; 10 × 10 mm = 100 ml / 155 g; 20 × 12 mm = 240 ml / 372 g. Color / Color Options: Standard: Black, Grey and Off-White. Additional Colors Shown in the Official Color Chart: Anthracite, Glittered Copper and Dark Brown Package Contents: 290 ml cartridge Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Joint combinations and adhesion of aluminum, wood, metal and glass, • All kinds of cladding facade joints, • Intersection and adhesion details of prefabricated elements, • Filling joints and adhesion of natural materials such as marble, natural stone and granite, • Joint combinations and adhesion of glass, ceramic, tiles and glazed surfaces, • Joints of sheet and metal for adhesion, isolation and the absorption of the vibrations in the production of automotive, container, vehicle body and caravan, • Joints and adhesion of stainless, galvanized or black steels, • Production and installation of ventilation ducts and air conditioners.	Cartridge	3,248 FCFA	3,606 FCFA
Polymera MS 950 MS Polymer Based Multi-purpose Elastic Adhesive MS Polymer based, single component, elastic, solvent and isocyanate free, hybrid construction sealant and adhesive. Product Code: F.81950 Adhesive use: varies with the application surface and load. Sealant use per 1 running metre: 6 × 6 mm joint = 36 ml / 55.8 g; 10 × 10 mm = 100 ml / 155 g; 20 × 12 mm = 240 ml / 372 g. Color / Color Options: Standard: Black, Grey and Off-White. Additional Colors Shown in the Official Color Chart: Anthracite, Glittered Copper and Dark Brown Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Joint combinations and adhesion of aluminum, wood, metal and glass, • All kinds of cladding facade joints, • Intersection and adhesion details of prefabricated elements, • Filling joints and adhesion of natural materials such as marble, natural stone and granite, • Joint combinations and adhesion of glass, ceramic, tiles and glazed surfaces, • Joints of sheet and metal for adhesion, isolation and the absorption of the vibrations in the production of automotive, container, vehicle body and caravan, • Joints and adhesion of stainless, galvanized or black steels, • Production and installation of ventilation ducts and air conditioners.	Sausage	5,175 FCFA	5,915 FCFA
Polymera MS 960 MS Polymer Based Auto Glass (Windshield) Adhesive MS Polymer based, single component, elastic, solvent and isocyanate free, hybrid, auto glass adhesive. Product Code: F.81982 Varies with the application surface and load. Color / Color Options: Black Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		• Elastic bonding of vehicle windows, • Bonding, isolation and absorption of vibration at sheet metal and metal joints in automotive, container, body and caravan manufacturing.	Sausage	6,223 FCFA	6,916 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Polymera MS 965 MS Polymer Based Industrial Adhesive MS Polymer based, single component, elastic, solvent and isocyanate free, hybrid, industrial adhesive. Product Code: F.81995 Varies with the application surface and load. Color / Color Options: Black and White Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		• Bonding and sealing in automotive, container, bodywork, and caravan manufacturing, particularly at sheet and metal joint areas to ensure sealing and absorb vibrations during use, • Bonding and sealing of sunroof systems, • Bonding the roofs of automobiles, trains, and trucks, • Bonding aluminum or polyester corner profiles to trailers, • Bonding automotive flooring systems, • Sealing welding seams.	Sausage	7,320 FCFA	8,013 FCFA
Polymera MS 953 MS Polymer Based Transparent Adhesive MS polymer based, single component, elastic, solvent and isocyanate free, transparent sealant and adhesive. Product Code: F.80983 Adhesive use: varies with the application surface and load. Sealant use per 1 running metre: 6 × 6 mm joint = 36 ml / 37.8 g; 10 × 10 mm = 100 ml / 105 g; 20 × 12 mm = 240 ml / 252 g. Color / Color Options: Transparent Package Contents: 290 ml cartridge Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Applications where transparent adhesives and sealing materials are required, • Installation and isolation of glass, mirror and glazed surfaces, • Joint combinations and adhesion of aluminum, wood, metal and glass, • Joints of sheet and metal for adhesion, isolation and the absorption of the vibrations in the production of automotive, container, vehicle body and caravan, • Filling joints and adhesion of natural materials such as marble, natural stone and granite.	Cartridge	4,872 FCFA	5,118 FCFA
Polymera MS 953 MS Polymer Based Transparent Adhesive MS polymer based, single component, elastic, solvent and isocyanate free, transparent sealant and adhesive. Product Code: F.81983 Adhesive use: varies with the application surface and load. Sealant use per 1 running metre: 6 × 6 mm joint = 36 ml / 37.8 g; 10 × 10 mm = 100 ml / 105 g; 20 × 12 mm = 240 ml / 252 g. Color / Color Options: Transparent Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		• Indoor and outdoor, • Applications where transparent adhesives and sealing materials are required, • Installation and isolation of glass, mirror and glazed surfaces, • Joint combinations and adhesion of aluminum, wood, metal and glass, • Joints of sheet and metal for adhesion, isolation and the absorption of the vibrations in the production of automotive, container, vehicle body and caravan, • Filling joints and adhesion of natural materials such as marble, natural stone and granite.	Sausage	7,389 FCFA	7,898 FCFA



Description Description	Photo Photo	Application Area Domaines d'Application	Unit Unité	CFR Kribi Price CFR Kribi Prix	Yaounde Price Yaoundé Prix
Rapido High Tack MS Polymer Based Fast Adhesive MS polymer based, single component, hard-elastic, solvent and isocyanate free, fast curing, strong adhesive with high initial tack. Product Code: F.80951 Varies with the application surface and load. Color / Color Options: Black, White and Grey Package Contents: 290 ml cartridge Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Installation of curtain tracks and roller blinds, - Fast installation and bonding of almost all kinds of materials, - Installation of wood and composite materials, - Elastic bonding of metals (aluminum, steel and stainless steel, anodized aluminum, brass, copper etc.), - Installation and bonding of ventilation systems, - Fast installation in bath, kitchen and sanitary areas, - Fast installation and bonding of natural materials such as marble, natural stone, granite.	Cartridge	4,275 FCFA	4,621 FCFA
Rapido High Tack MS Polymer Based Fast Adhesive MS polymer based, single component, hard-elastic, solvent and isocyanate free, fast curing, strong adhesive with high initial tack. Product Code: F.81951 Varies with the application surface and load. Color / Color Options: Black, White and Grey Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Installation of curtain tracks and roller blinds, - Fast installation and bonding of almost all kinds of materials, - Installation of wood and composite materials, - Elastic bonding of metals (aluminum, steel and stainless steel, anodized aluminum, brass, copper etc.), - Installation and bonding of ventilation systems, - Fast installation in bath, kitchen and sanitary areas, - Fast installation and bonding of natural materials such as marble, natural stone, granite.	Sausage	7,361 FCFA	8,078 FCFA
EPDM Bond Neutral Silicone Based EPDM Adhesive Neutral silicone based, single component, solvent or isocyanate free elastic adhesive for bonding EPDM membranes and coverings. Product Code: F.81952 Varies with the application surface. Color / Color Options: Black Package Contents: 600 ml sausage Certification: CE, ISO Warranty: According to System		- Indoor and outdoor, - Bonding and fixing of EPDM membranes and coverings.	Sausage	4,013 FCFA	4,660 FCFA

COFIWO SARL

Opposite of the General Hospital, Ngousso, Yaoundé / Cameroon

NIU: M012618319923Z Tel: +237 697 94 95 20 E-mail: cameroon@cofiwo.com