

Catalogue
#1325

Tile Catalogue

COFIWO
Construction Finishing Works



Cofiwo Inc.

Build Excellence Together

Cofiwo Construction and Technology Inc. provides integrated product systems and service solutions to the construction industry to assist in the seamless planning, management, and completion of construction projects. Our team of experts produces integrated product systems on a marginal benefit basis to meet all the construction finishing needs of projects.

We are not limited to the supply of products and systems but also offer a wide range of services to support the entire finishing process of projects. Our team provides services such as architectural project design, brand and corporate identity design, logistics, warehousing, storage, packaging, loading, fixing, inventory management, assembly and installation services.

As a Cofiwo, we are proud to be recognized as a trusted partner in the industry.

Website





INHALT

Concept Index

Marble Collections

Astoria 30x90 45x45 cm	7
Cleopatra 60x120 60x60 cm	9
Lusso 120x180 cm	11
Bianca 60x120 cm	13
Gordion 100x100 40x120 cm	15
Luca 60x60 cm	17
Mia 100x100 60x120 cm	19
Himalaya 60x120 cm	21
Maxi 30x60 60x60 61x61 40x40 cm	23
Darwin 60x120 cm	25
Charlotte 60x120 cm	27

Stone / Concerate Collections

Arcides 60x120 61x61 60x60 30x60 cm	31
Concept 120x180 60x120 61x61 60x60 30x60 cm	33
Bona Dea 100x100 60x120 61x61 60x60 30x60 cm	39
Sempre 61x61 60x60 19.7x19.7 cm	43
Dora 61x61 60x60 cm	45
Pera 30x90 45x45 cm	47
Salt Cave 60x120 cm	49
Tuana 60x60 cm	51
Belgium Stone 60x60 30x60 cm	53
Chester 61x61 50x50 cm	55
Quartz 60x60 30x60 cm	57
Boho 60x120 cm	59

Wood Collections

Albero 60x60 cm	63
Palmer 61x61 cm	65
Cadore 50x50 cm	67
Catalpa 50x50 cm	69
Goblin 50x50 cm	71
Herringwood 50x50 cm	73
Modellato 50x50 cm	75
Iroko 20x120 cm	77
Eleganza 20x120 cm	79
Fenix 20x120 cm	81

Mix Collections

Alba 19.7x19.7 cm	85
Pastel 19.7x19.7 cm	87
Juno 30x90 45x45 cm	89
Dove 30x90 30x60 cm	91
Guandi 30x90 cm	93

20 mm Collections

Manhattan 60x60x2 45x90x2 cm	97
Belgium Stone 60x60x2 cm	99
Quartz 60x60x2 45x90x2 cm	101

Tiling Solutions

Profiles External Corner Profiles, Internal Corner Profiles, Stair Step Noising Profiles, Finishing Profiles	105
Adhesives and Grout Fillers	113
Tile Leveling	115
Installation Materials	117

Technical Specifications

125




Marble Collections

Inspired by the timeless beauty of natural marble, this collection combines elegance and durability. With intricate veining and luxurious textures, these tiles bring a sophisticated touch to both modern and classic designs.


Lusso | Gold



//// Astoria



30x90 cm
Crema



30x90 cm
Crema Decofon




30x90 cm
Crema Decor



30x90 cm
Turquoise



30x90 cm
Turquoise Decofon



30x90 cm
Turquoise Decor



30x90 cm
Grey



30x90 cm
Grey Decofon



30x90 cm
Grey Decor



30x90 cm
Brown




30x90 cm
Brown Decofon



30x90 cm
Brown Decor



45x45 cm
Crema



45x45 cm
Turquoise



45x45 cm
Grey

30x90 cm
12x36"

👉 G R V^s

45x45 cm
18x18"

👉 G R V^s 📦






Cleopatra




120x180 cm
Face A



120x180 cm
Face B



60x120 cm
Classic



60x60 cm
Classic

120x180 cm 48x71"	TP FL R V' MOHS 5.5
----------------------	---------------------

60x120 cm 24x48"	TP FL R V ^s MOHS 5.5
---------------------	---------------------------------

60x60 cm 24x24"	TP FL R V ^s MOHS 5.5
--------------------	---------------------------------






//// Lusso



120x180 cm
Sky



120x180 cm
Ash

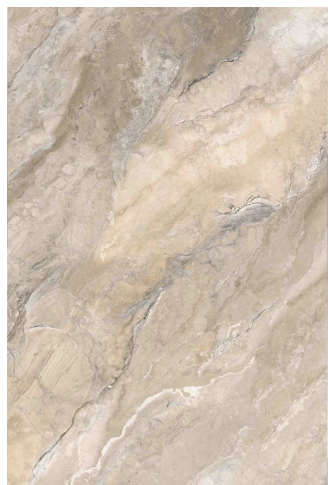

120x180 cm
Gold


120x180 cm
48x71"

TP FL R V³ MOHS 5.5





//// Bianca



60x120 cm
Crema

60x120 cm
24x48"

TP FL R V³ MOHS 5.5





//// Gordion



100x100 cm
Bone



100x100 cm
Mink



100x100 cm
Mid Grey



40x120 cm
White



40x120 cm
White Decofon



40x120 cm
Taupe



40x120 cm
Dark Grey

100x100 cm
40x40"

TP M R V³

40x120 cm
16x48"

TP M R V³






Luca



60x60 cm
Bone



60x60 cm
Taupe



60x60 cm
Light Grey

60x60 cm
24x24"

TP M R V³





Mia



100x100 cm
Classic



60x120 cm
Classic

100x100 cm 40x40"	TP FL R V ³ MOHS 5.5
60x120 cm 24x48"	TP FL R V ³ MOHS 5.5





//// Himalaya



60x120 cm
Ice


60x120 cm
24x48"

TP FL R V³ MOHS 5.5





////// **Maxi**




30x60 cm
White




30x60 cm
White Decofon



30x60 cm
White Decor



61x61 cm
White



60x60 cm
White



40x40 cm
White


30x60 cm 12x24"		G	V ³
60x60 cm 24x24"		G	R
		M	V ³

61x61 cm 24x24"		G	V ³
		M	V ³
40x40 cm 16x16"		M	V ³





//// Darwin



60x120 cm
Anthracite



60x120 cm
Grey



60x120 cm
Taupe



60x120 cm
Mink

60x120 cm
24x48"

TP FL R V³ MOHS 5.0





Charlotte



60x120 cm
Classic

60x120 cm
24x48"

TP FL R V³ MOHS 5.5





Arcides | Latte

Stone / Concerate Collections

Merging the raw beauty of stone with the industrial appeal of concrete, this collection delivers a bold yet versatile aesthetic. Ideal for contemporary spaces, it offers durability, texture, and a sense of urban refinement.



Arcides



60x120 cm
Bone



60x120 cm
Latte



60x120 cm
Smoke



60x120 cm
Grey



60x120 cm
Antracite



61x61 cm
Bone



61x61 cm
Latte



61x61 cm
Smoke



61x61 cm
Grey



61x61 cm
Antracite



60x60 cm
Bone



60x60 cm
Latte




60x60 cm
Smoke




60x60 cm
Grey



60x60 cm
Antracite




30x60 cm
Bone



30x60 cm
Latte



30x60 cm
Smoke



30x60 cm
Grey



30x60 cm
Antracite

60x120 cm
24x48"

TP M R V³
TP SL R V³

60x60 cm
24x24"

G R V³
 M R V³
 SL R V³

61x61 cm
24x24"

G V³
 M V³


30x60 cm
12x24"

G R V³
 SL R V³
 M R V³





Concept Page 1

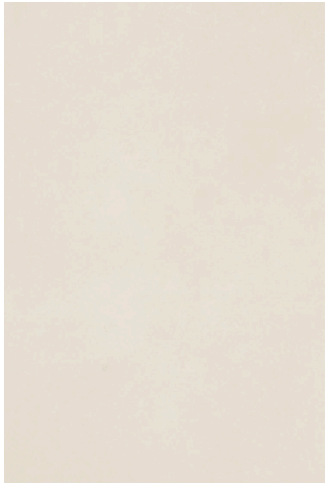

120x180 cm
White



120x180 cm
Light Grey



120x180 cm
Grey



120x180 cm
Mink



120x180 cm
Beige



120x180 cm
Taupe



120x180 cm
Anthracite



120x180 cm
Black

120x180 cm	TP	FL	R	V ²	MOHS	5.5
48x71"			TP	SL	R	V ² 
			TP	M	R	V ² 
61x61 cm		TP	FL	V ²	MOHS	5.5
24x24"				TP	M	V ² 
60x60 cm	TP	FL	R	V ²	MOHS	5.5
24x24"			TP	M	R	V ² 

60x120 cm 24x48"	TP	FL	R	V²	MOHS 5.5
	TP	SL	R	V²	
	TP	M	R	V²	
30x60 cm 12x24"	TP	FL	R	V²	MOHS 5.5
	TP	M	R	V²	





60x120 cm
White

60x120 cm
Light Grey

60x120 cm
Grey

60x120 cm
Mink

60x120 cm
Beige

60x120 cm
Taupe

60x120 cm
Anthracite

60x120 cm
Black

60x60 cm
White

60x60 cm
Light Grey

60x60 cm
Grey

60x60 cm
Mink

60x60 cm
Beige

60x60 cm
Taupe

60x60 cm
Anthracite

60x60 cm
Black

120x180 cm 48x71"	TP	FL	R	V ²	MOHS	5.5
			TP	SL	R	V ² 
			TP	M	R	V ² 
61x61 cm 24x24"		TP	FL	V ²	MOHS	5.5
				TP	M	V ² 
60x60 cm 24x24"	TP	FL	R	V ²	MOHS	5.5
			TP	M	R	V ² 

60x120 cm 24x48"	TP	FL	R	V²	MOHS 5.5
		TP	SL	R	V²
		TP	M	R	V²
30x60 cm 12x24"	TP	FL	R	V²	MOHS 5.5
		TP	M	R	V²





Concept Page 3



61x61 cm
White



61x61 cm
Light Grey



61x61 cm
Grey



61x61 cm
Mink




61x61 cm
Beige



61x61 cm
Taupe



61x61 cm
Anthracite



61x61 cm
Black



30x60 cm
White



30x60 cm
Light Grey



30x60 cm
Grey




30x60 cm
Mink



30x60 cm
Beige



30x60 cm
Taupe



30x60 cm
Anthracite



30x60 cm
Black

120x180 cm
48x71"

TP FL R V² MOHS 5.5
TP SL R V² 
TP M R V² 

61x61 cm
24x24"

TP FL V² MOHS 5.5
TP M V² 

60x60 cm
24x24"

TP FL R V² MOHS 5.5
TP M R V² 

60x120 cm
24x48"

TP FL R V² MOHS 5.5
TP SL R V² 
TP M R V² 


30x60 cm
12x24"

TP FL R V² MOHS 5.5
TP M R V² 





//// Bona Dea Page 1

				
100x100 cm Light Grey	100x100 cm Dark Grey	100x100 cm Ivory	100x100 cm Crema	100x100 cm Bianco
				
60x120 cm Light Grey	60x120 cm Dark Grey	60x120 cm Ivory	60x120 cm Crema	60x120 cm Bianco
				
60x60 cm Light Grey	60x60 cm Dark Grey	60x60 cm Ivory	60x60 cm Crema	60x60 cm Bianco
				
60x60 cm Light Grey Decofon	60x60 cm Dark Grey Decofon	60x60 cm Ivory Decofon		



100x100 cm 40x40"	TP SL R V² 
	TP M R V² 
60x60 cm 24x24"	TP SL R M V² 
30x60 cm 12x24"	TP SL M V² 

60x120 cm 24x48"	TP SL R V² 
	TP M R V² 
61x61 cm 24x24"	TP SL M V² 





//// Bona Dea Page 2

				
61x61 cm Light Grey	61x61 cm Dark Grey	61x61 cm Ivory	61x61 cm Crema	61x61 cm Bianco
				
30x60 cm Light Grey	30x60 cm Dark Grey	30x60 cm Ivory	30x60 cm Crema	30x60 cm Bianco

100x100 cm 40x40"	TP SL R V² 
	TP M R V² 
60x60 cm 24x24"	TP SL R M V² 
30x60 cm 12x24"	TP SL M V² 

60x120 cm 24x48"	TP SL R V² 
	TP M R V² 
61x61 cm 24x24"	TP SL M V² 






Sempre




61x61 cm
Bianca




61x61 cm
Rosa




61x61 cm
Grigio




61x61 cm
Nero




61x61 cm
Junior Bianca



61x61 cm
Junior Rosa



61x61 cm
Junior Grigio




61x61 cm
Junior Nero




60x60 cm
Bianca



60x60 cm
Rosa



60x60 cm
Grigio




60x60 cm
Nero




60x60 cm
Junior Bianca



60x60 cm
Junior Rosa



60x60 cm
Junior Grigio



60x60 cm
Junior Nero



19.7x19.7 cm
Junior Bianca



19.7x19.7 cm
Junior Rosa




19.7x19.7 cm
Junior Grigio



19.7x19.7 cm
Junior Nero

61x61 cm
24x24"



19.7x19x7 cm
8x8"



60x60 cm
24x24"





//// Dora



61x61 cm
Classic



60x60 cm
Classic

61x61 cm
24x24"




60x60 cm
24x24"






Pera




30x90 cm
White



30x90 cm
Light Grey




30x90 cm
Grey



30x90 cm
White Decofon



30x90 cm
Light Grey Decofon



30x90 cm
Grey Decofon



45x45 cm
White



45x45 cm
Light Grey



45x45 cm
Grey

30x90 cm 12x36"	M R V²
45x45 cm 18x18"	M R V²





//// Salt Cave



60x120 cm
Ice



60x120 cm
Almond



60x120 cm
Taupe


60x120 cm
24x48"

TP M R V³





//// Tuana



60x60 cm
Light Grey



60x60 cm
Grey

60x60 cm
24x24"

TP M R V³





Belgium Stone



60x60 cm
Grey



60x60 cm
Black




30x60 cm
Grey



30x60 cm
Black



60x60x2 cm
Grey R-11



60x60x2 cm
Black R-11

60x60 cm 24x24"	TP M R V² 
30x60 cm 12x24"	TP M R V² 
60x60x2 cm 24x24"	TP M R V² 






Chester



61x61 cm
Beige



61x61 cm
Grey



50x50 cm
Brown



50x50 cm
Anthracite



50x50 cm
Beige Patch



50x50 cm
Mix Patch

61x61 cm
24x24"




50x50 cm
24x24"






Quartz




60x60 cm
Beige



60x60 cm
Grey



60x60 cm
Anthracite




30x60 cm
Beige




30x60 cm
Grey



30x60 cm
Anthracite



60x60x2 cm
Beige R-11



60x60x2 cm
Grey R-11



60x60x2 cm
Anthracite R-11



60x60x2 cm
Bone R-11




45x90x2 cm
Beige R-11



45x90x2 cm
Grey R-11



45x90x2 cm
Anthracite R-11



45x90x2 cm
Bone R-11

60x60 cm 24x24"	TP M R V²
60x60x2 cm 24x24"	TP M R V²

30x60 cm 12x24"	TP M R V²
45x90x2 cm 24x24"	TP M R V²





Boho



60x120 cm
Dark Grey



60x120 cm
Light Grey

60x120 cm
24x48"

TP	M	R	V²	
TP	M	R	V²	





Fenix | Cherry

Wood Collections

Embodying the warmth and authenticity of natural wood, these tiles provide the charm of wooden surfaces with the durability of porcelain. Perfect for creating cozy, inviting interiors with a touch of nature.



Albero



60x60 cm
Oak R-11




60x60 cm
Grey R-11




60x60 cm
Ebony R-11

60x60 cm
24x24"

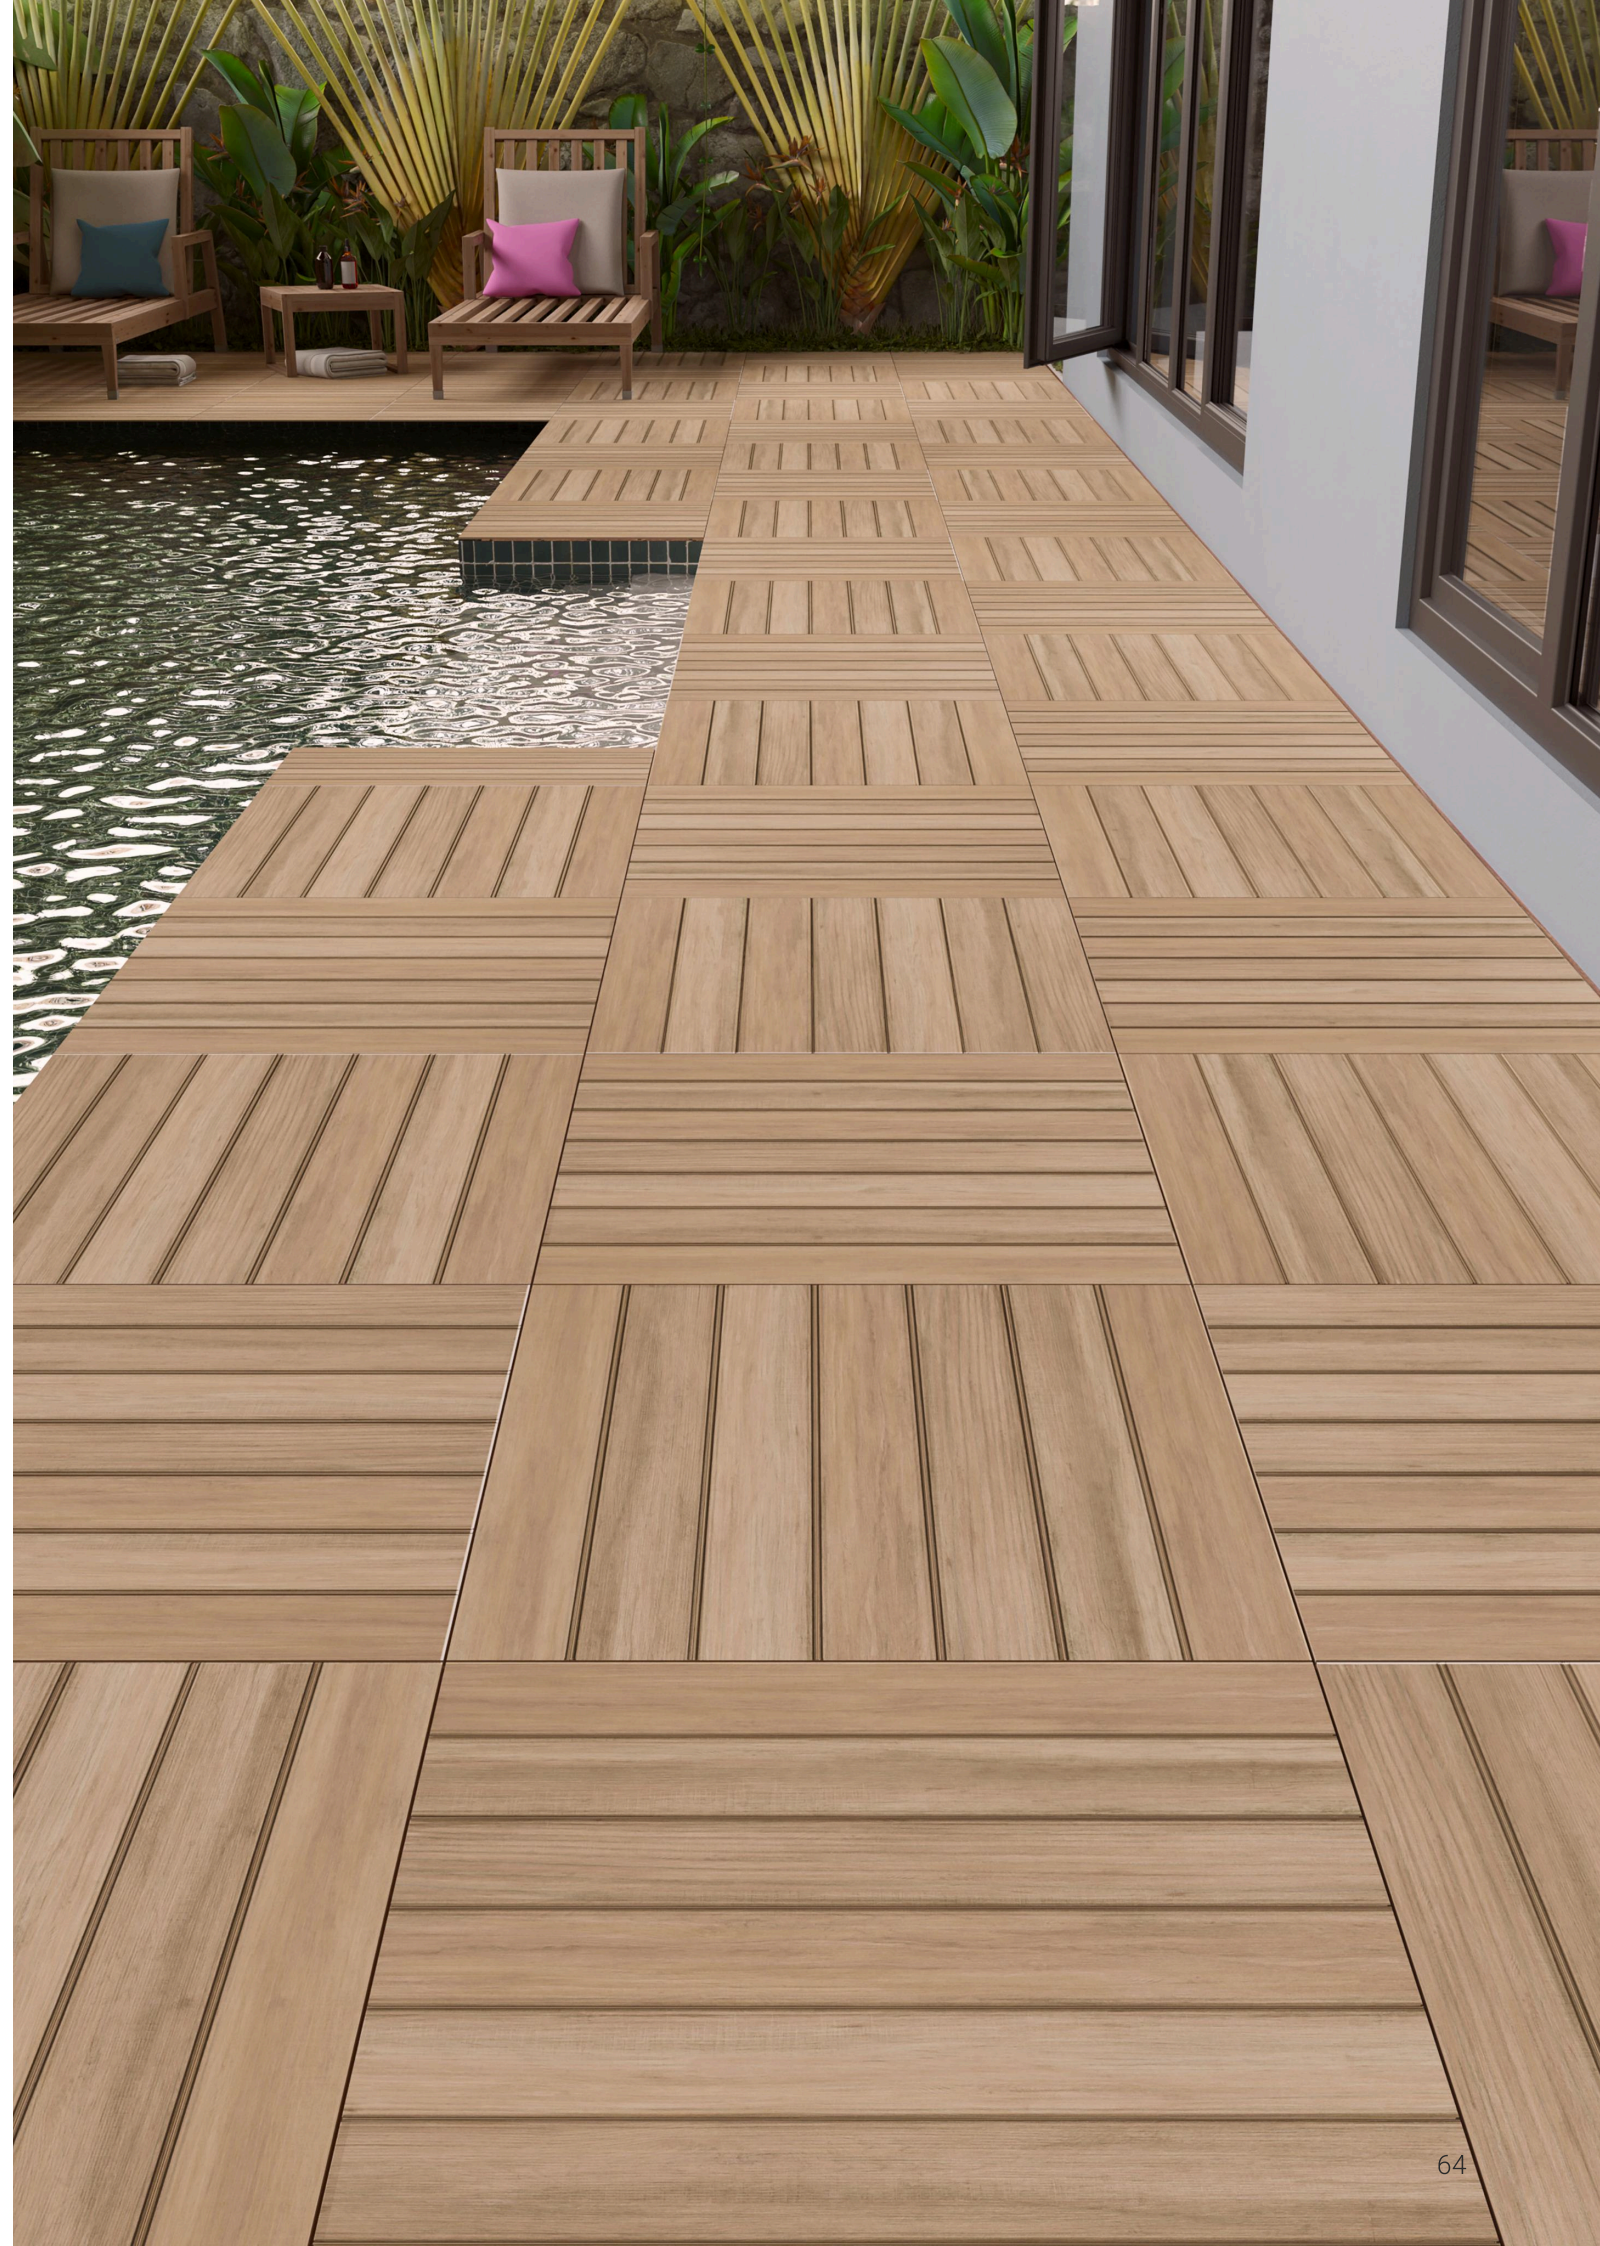



Palmer



61x61 cm
Classic

61x61 cm
24x24"

TP M V³





//// Cadore



50x50 cm
Classic

50x50 cm
24x24"





//// Catalpa



50x50 cm
Classic

50x50 cm
24x24"





//// Goblin



50x50 cm
Classic

50x50 cm
24x24"





//// Herringwood



50x50 cm
Classic

50x50 cm
24x24"





Modellato



50x50 cm
Classic

50x50 cm
24x24"





//// Iroko



20x120 cm
Pearl



20x120 cm
Warm Grey



20x120 cm
Brown

20x120 cm
8x48"





//// Eleganza



20x120 cm
Maple



20x120 cm
Walnut



20x120 cm
Oak

20x120 cm
8x48"





//// Fenix



20x120 cm
Maple



20x120 cm
Cherry



20x120 cm
Teak



20x120 cm
Grey

20x120 cm
8x48"





Juno | Emerald Decofon

Juno | Ruby Decofon

Juno | Diamond

Mix Collections


A creative fusion of materials, colors, and textures, this collection offers limitless design possibilities. Blending elements of stone, wood, and modern finishes, it allows for unique and personalized spaces.



Alba




19.7x19.7 cm
Classic



19.7x19.7 cm
Autumn



19.7x19.7 cm
Spring



19.7x19.7 cm
Winter



19.7x19.7 cm
Summer

19.7x19x7 cm
8x8"





//// Pastel



19.7x19.7 cm
Red



19.7x19.7 cm
Black

19.7x19x7 cm
8x8"





Juno



30x90 cm
Diamond



30x90 cm
Diamond Decofon



30x90 cm
Ruby




30x90 cm
Ruby Decofon



30x90 cm
Emerald




30x90 cm
Emerald Decofon



30x90 cm
Sapphire



30x90 cm
Sapphire Decofon



30x90 cm
Floral Decofon




45x45 cm
Diamond

30x90 cm
12x36"

G R V^s


45x45 cm
18x18"

G R V^s

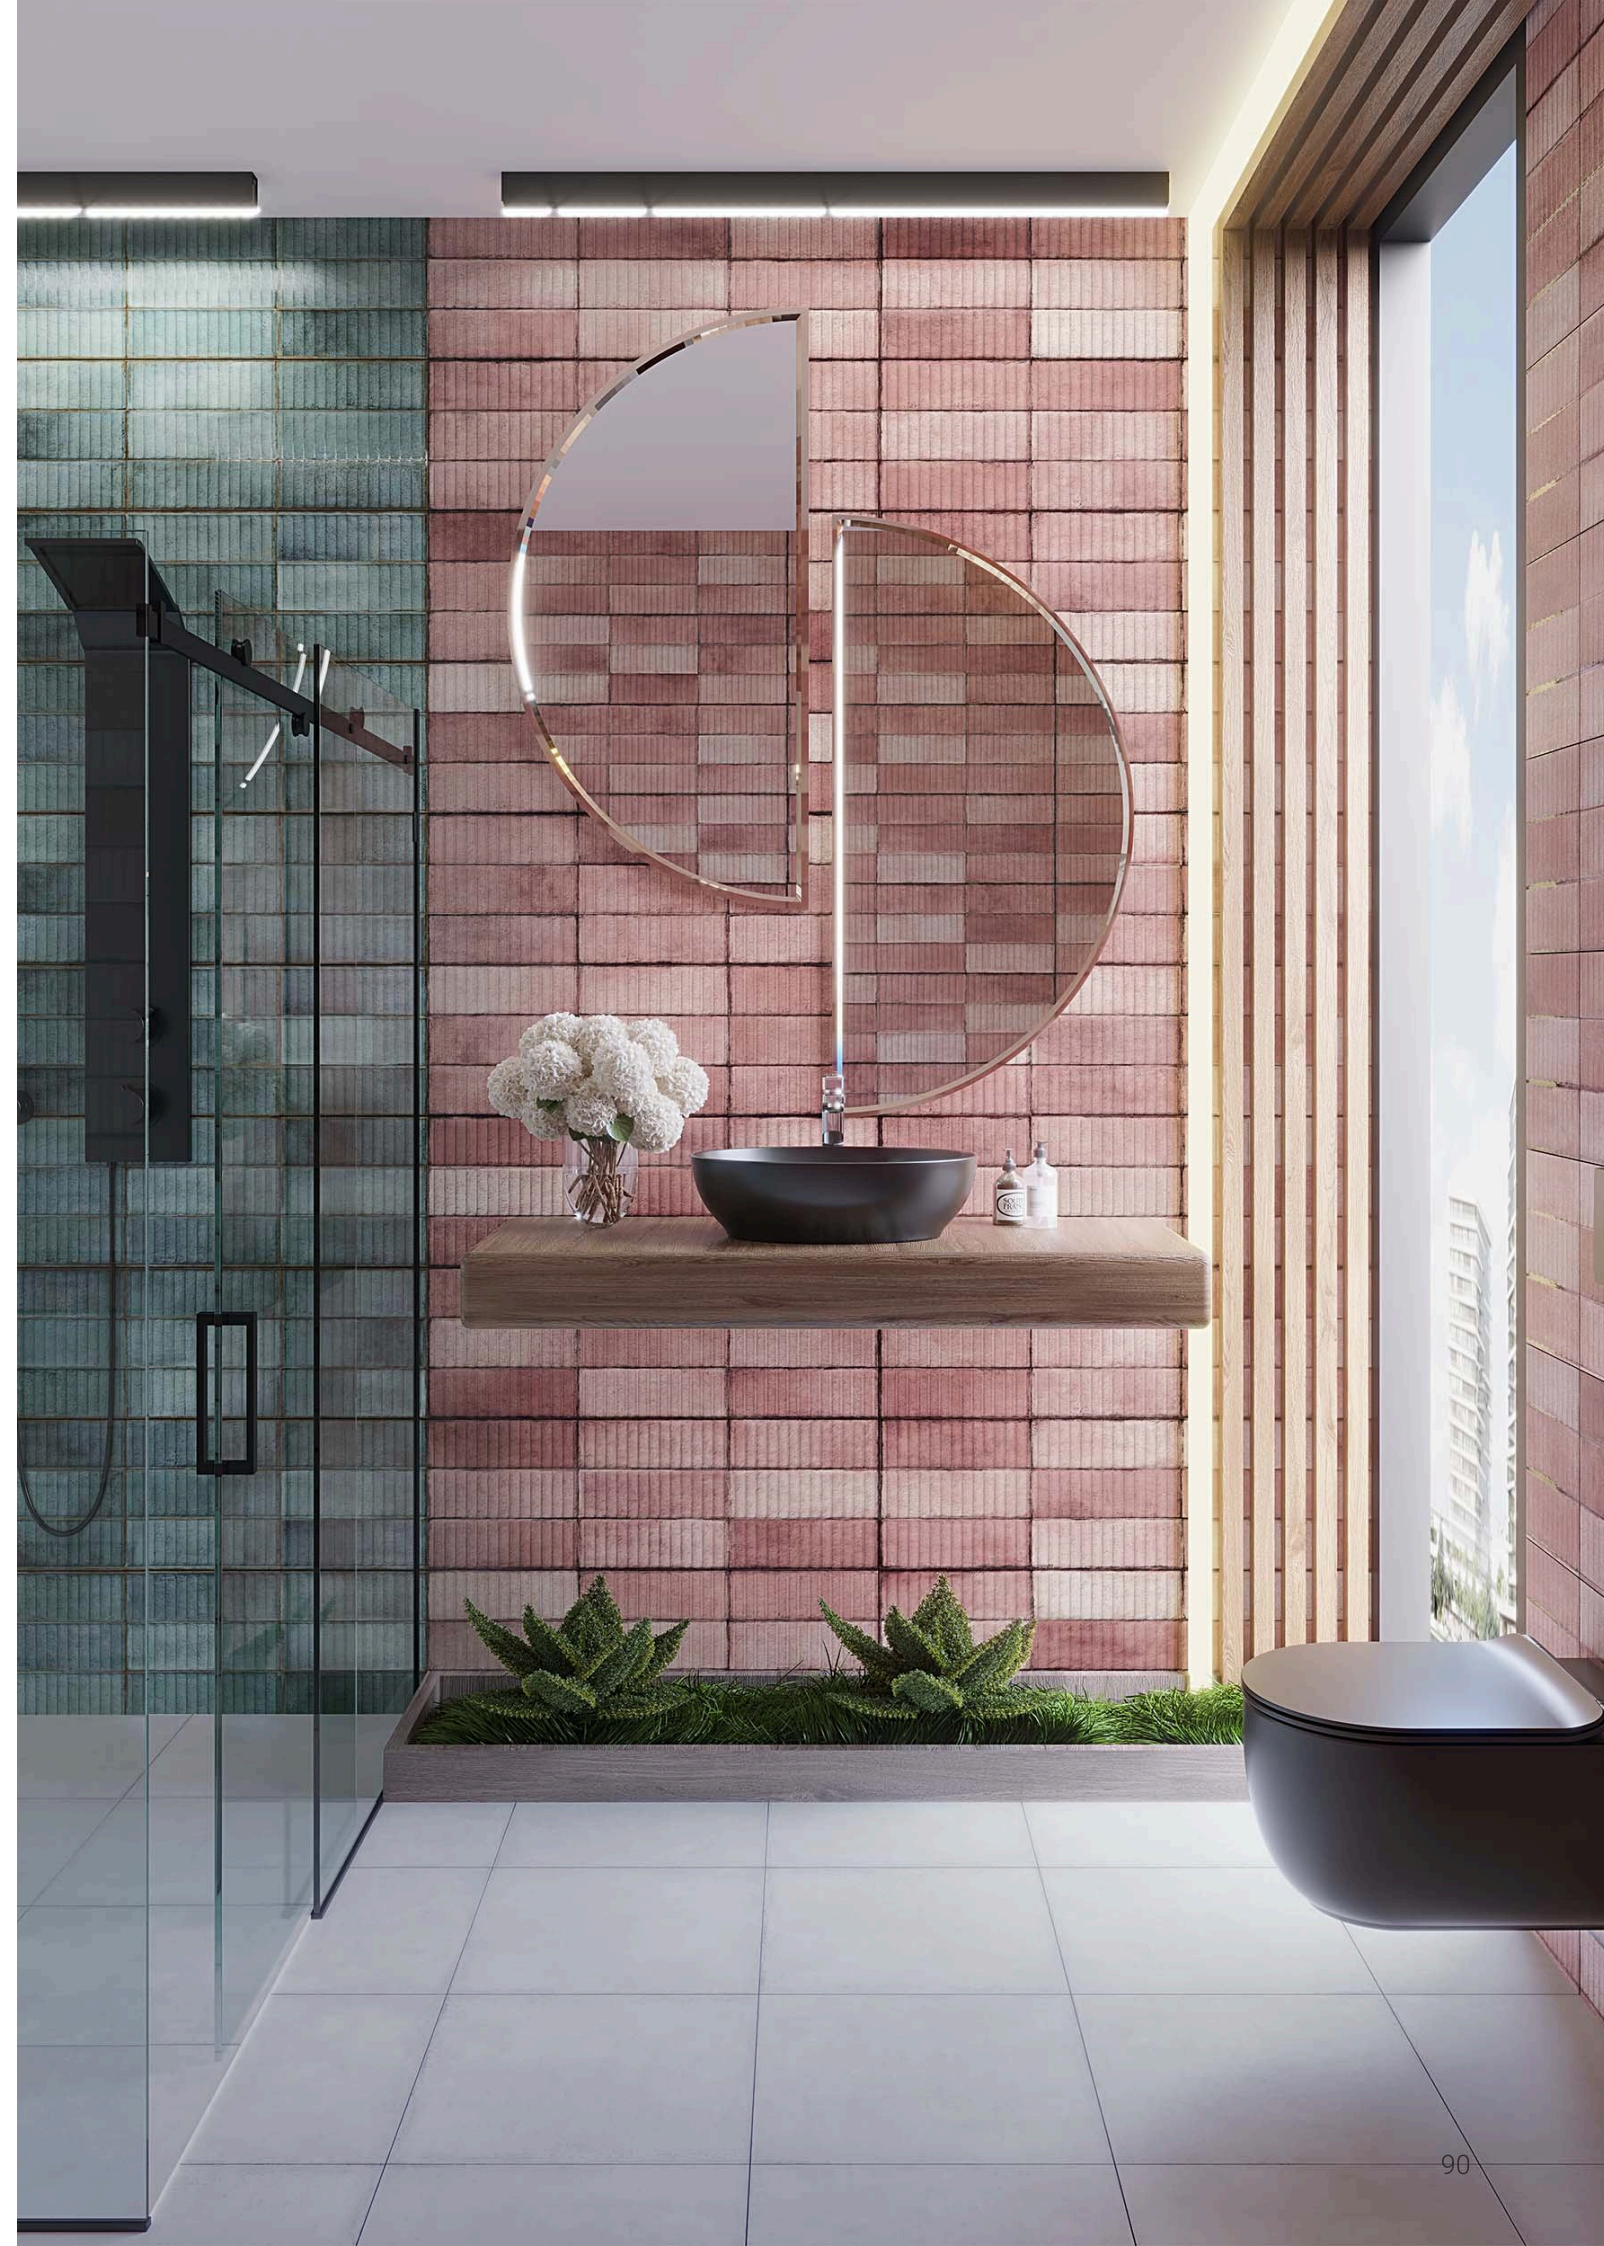





//// Dove




30x90 cm
White Matt



30x90 cm
White Glossy



30x60 cm
White Matt



30x60 cm
White Glossy

30x90 cm
12x36"

☞ M R V'

30x60 cm
12x24"

☞ G V'
☞ M V'





//// Gaudi




30x90 cm
Classic Decofon

30x90 cm
12x36"

👉 G R V^s



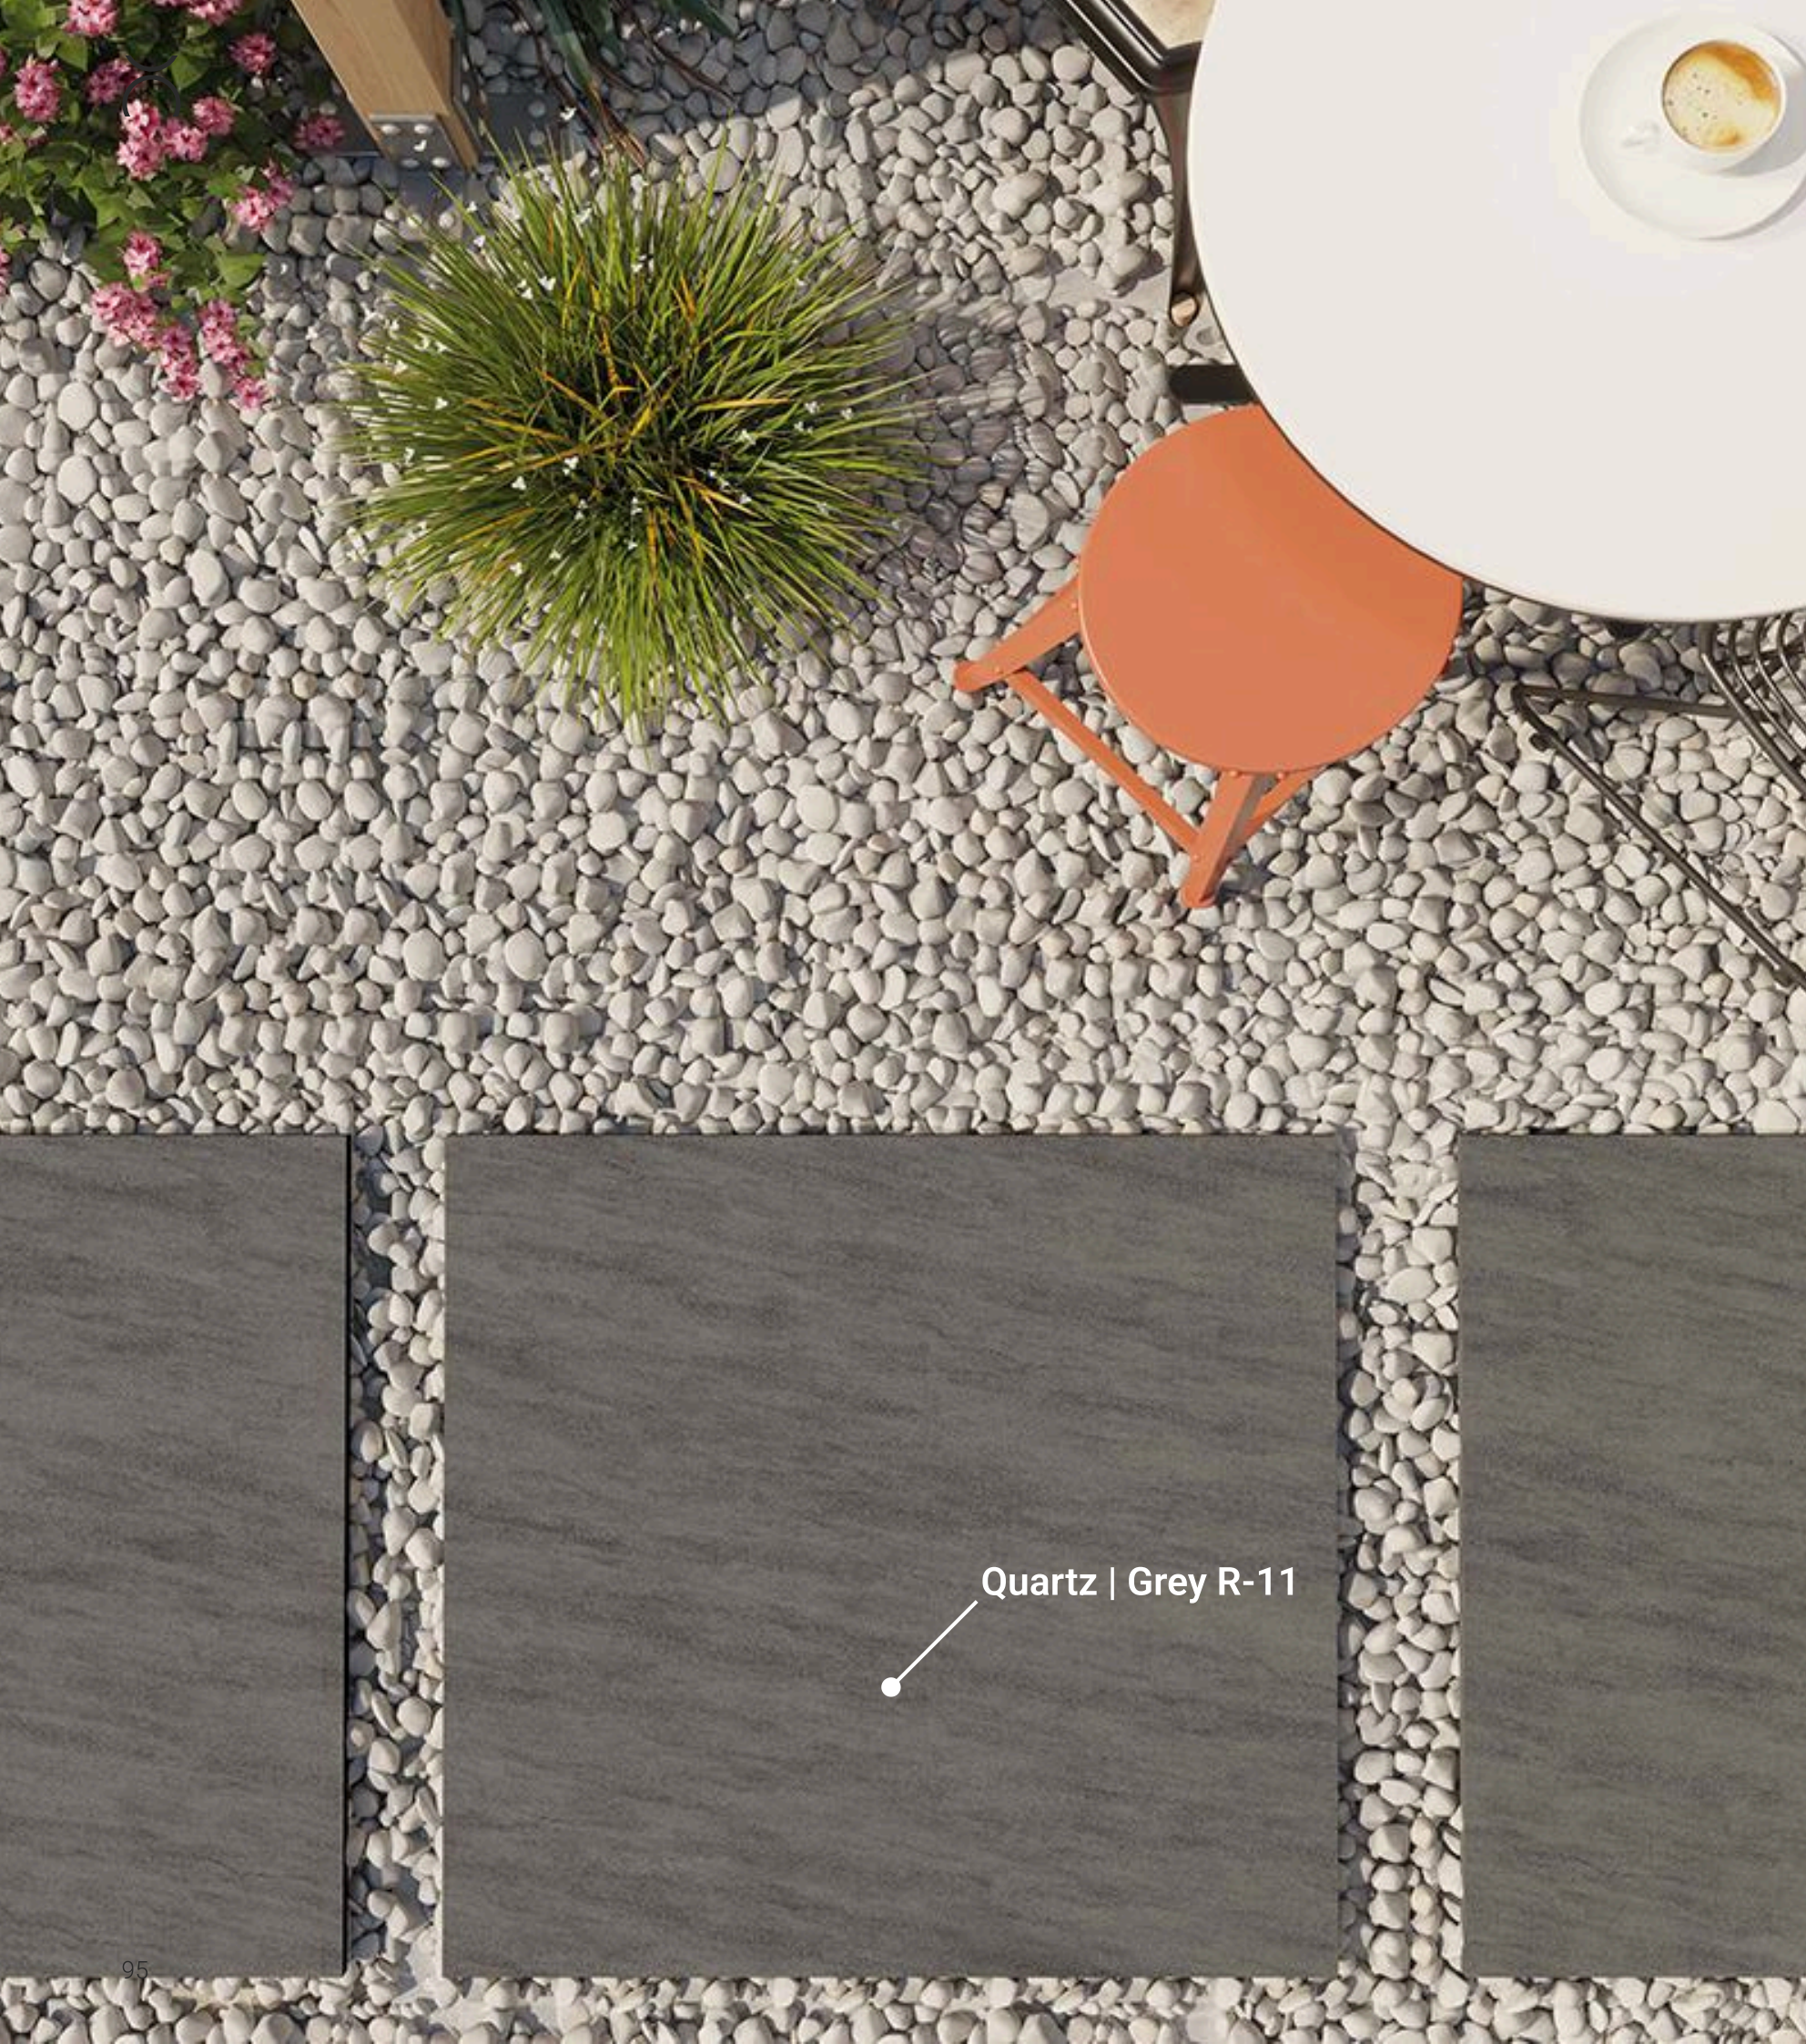


Quartz | Grey R-11

20 mm Collections

Designed for high-performance outdoor applications, the 20 mm collection combines strength, resistance, and style. Perfect for patios, terraces, and high-traffic areas, these tiles ensure longevity without compromising aesthetics.



//// Manhattan



60x60x2 cm
Beige R-11



60x60x2 cm
Grey R-11



45x90x2 cm
Beige R-11



45x90x2 cm
Grey R-11

60x60x2 cm 24x24"	TP M R V³ 
45x90x2 cm 24x24"	TP M R V³ 





Belgium Stone



60x60 cm
Grey



60x60 cm
Black




30x60 cm
Grey



30x60 cm
Black



60x60x2 cm
Grey R-11




60x60x2 cm
Black R-11

60x60 cm 24x24"	TP M R V² 
30x60 cm 12x24"	TP M R V² 
60x60x2 cm 24x24"	TP M R V² 







Quartz




60x60 cm
Beige



60x60 cm
Grey



60x60 cm
Anthracite




30x60 cm
Beige




30x60 cm
Grey



30x60 cm
Anthracite



60x60x2 cm
Beige R-11



60x60x2 cm
Grey R-11



60x60x2 cm
Anthracite R-11



60x60x2 cm
Bone R-11




45x90x2 cm
Beige R-11



45x90x2 cm
Grey R-11



45x90x2 cm
Anthracite R-11



45x90x2 cm
Bone R-11

60x60 cm
24x24" TP M R V² 

60x60x2 cm
24x24" TP M R V² 

30x60 cm
12x24" TP M R V² 

45x90x2 cm
24x24" TP M R V² 







Tiling Solutions

Achieving a flawless and durable tile installation requires the right materials and tools. Our tiling solutions include high-quality adhesives, grouts, profiles, and cutting tools designed to enhance both functionality and aesthetics. From strong bonding adhesives to precision-cutting machines, every product ensures a seamless finish, long-lasting performance, and effortless installation. Whether for residential or commercial spaces, our solutions provide the perfect support for every tiling project.





External Corner Profiles

External corner profile is designed for protecting and finishing tile edges at external corners. It enhances the durability of tile installations while providing a clean and aesthetic appearance. Ideal for use in tiled walls, bathrooms, and commercial applications.





External Corner Profile - Oval

Product Code	Material	Thickness	Height	Weight	Length
#153283	Aluminium	1.0 mm	10 mm	330 gr	270 cm
#473552	Aluminium	1.0 mm	12 mm	370 gr	270 cm
#151647	Aluminium	0.7 mm	8 mm	210 gr	270 cm
#417740	Aluminium	0.7 mm	10 mm	230 gr	270 cm
#923989	Aluminium	0.7 mm	12 mm	245 gr	270 cm
#860990	Aluminium	0.7 mm	14 mm	260 gr	270 cm
#734132	Aluminium	0.6 mm	10 mm	180 gr	270 cm
#458535	Aluminium	0.6 mm	12 mm	200 gr	270 cm





External Corner Profiles - Oval Without Teeth

Product Code	Material	Thickness	Height	Weight	Length
#224420	Aluminium	1.0 mm	10 mm	330 gr	270 cm
#820540	Aluminium	1.0 mm	12 mm	370 gr	270 cm
#462200	Aluminium	0.7 mm	10 mm	230 gr	270 cm
#328537	Aluminium	0.7 mm	12 mm	245 gr	270 cm
#155560	Aluminium	0.7 mm	14 mm	260 gr	270 cm
#145366	Aluminium	0.6 mm	6 mm	100 gr	270 cm
#260163	Aluminium	0.6 mm	8 mm	110 gr	270 cm
#447055	Aluminium	0.6 mm	10 mm	120 gr	270 cm
#377865	Aluminium	0.6 mm	12 mm	130 gr	270 cm
#821388	Aluminium	0.6 mm	14 mm	140 gr	270 cm




External Corner Profile - Square

Product Code	Material	Thickness	Height	Weight	Length
#174731	Aluminium	1.0 mm	10 mm	310 gr	270 cm
#386578	Aluminium	1.0 mm	12 mm	355 gr	270 cm
#474865	Aluminium	0.7 mm	10 mm	240 gr	270 cm
#730219	Aluminium	0.7 mm	12 mm	250 gr	270 cm
#948565	Aluminium	0.7 mm	14 mm	260 gr	270 cm




External Corner Profile - Round

Product Code	Material	Thickness	Height	Weight	Length
#538970	Aluminium	1.3 mm	10 mm	315 gr	270 cm
#546156	Aluminium	1.3 mm	12 mm	325 gr	270 cm
#530407	Aluminium	0.9 mm	10 mm	225 gr	270 cm
#942764	Aluminium	0.9 mm	12 mm	235 gr	270 cm
#302437	Aluminium	0.85 mm	10 mm	200 gr	270 cm
#712892	Aluminium	0.85 mm	12 mm	225 gr	270 cm





External Corner Profile - Quarter

Product Code	Material	Thickness	Height	Weight	Length
#145498	Aluminium	1.0 mm	10 mm	380 gr	270 cm
#348186	Aluminium	1.0 mm	12 mm	390 gr	270 cm
#937417	Aluminium	0.7 mm	8 mm	255 gr	270 cm
#883962	Aluminium	0.7 mm	10 mm	290 gr	270 cm
#136378	Aluminium	0.7 mm	12 mm	310 gr	270 cm





External Corner Profile - Two Side Round

Product Code	Material	Thickness	Height	Weight	Length
#374181	Aluminium	1.0 mm	10 mm	290 gr	270 cm
#580907	Aluminium	1.0 mm	12 mm	330 gr	270 cm
#424087	Aluminium	0.8 mm	10 mm	220 gr	270 cm
#662774	Aluminium	0.8 mm	12 mm	230 gr	270 cm





External Corner Profile - Two Side Round With Teeth

Product Code	Material	Thickness	Height	Weight	Length
#961410	Aluminium	0.85 mm	10 mm	295 gr	270 cm
#792165	Aluminium	0.85 mm	12 mm	330 gr	270 cm




External Corner Profile - Two Side Square

Product Code	Material	Thickness	Height	Weight	Length
#839108	Aluminium	1.0 mm	10 mm	380 gr	270 cm
#930757	Aluminium	1.0 mm	12 mm	430 gr	270 cm
#470440	Aluminium	1.0 mm	14 mm	450 gr	270 cm
#586340	Aluminium	0.7 mm	10 mm	235 gr	270 cm
#208735	Aluminium	0.7 mm	12 mm	255 gr	270 cm



External Corner Profile - Two Side Slope

Product Code	Material	Thickness	Height	Weight	Length
#818299	Aluminium	1.0 mm	10 mm	300 gr	270 cm
#319449	Aluminium	1.0 mm	12 mm	330 gr	270 cm




External Corner Profile - Invisible

Product Code	Material	Thickness	Height	Weight	Length
#257408	Aluminium	1.0 mm	10 mm	320 gr	270 cm
#259758	Aluminium	1.0 mm	12 mm	330 gr	270 cm

Internal Corner Profiles

An internal corner profile is used to create a seamless and durable transition in tiled interior corners. It enhances the aesthetic appeal while protecting tile edges from chipping and damage. Suitable for bathrooms, kitchens, and commercial tiling applications.



Internal Corner Profile - Invisible

Product Code	Material	Thickness	Height	Weight	Length
#965951	Aluminium	1.0 mm	10 mm	350 gr	270 cm
#239899	Aluminium	1.0 mm	12 mm	360 gr	270 cm




Internal Corner Profile - Round

Product Code	Material	Thickness	Height	Weight	Length
#790413	Aluminium	1.0 mm	10 mm	340 gr	270 cm
#291883	Aluminium	1.0 mm	12 mm	350 gr	270 cm
#725504	Aluminium	0.7 mm	8 mm	200 gr	270 cm
#327603	Aluminium	0.7 mm	10 mm	215 gr	270 cm
#819672	Aluminium	0.7 mm	12 mm	230 gr	270 cm
#572331	Aluminium	0.7 mm	14 mm	240 gr	270 cm
#383511	Aluminium	0.6 mm	6 mm	170 gr	270 cm
#295989	Aluminium	0.6 mm	8 mm	180 gr	270 cm
#774609	Aluminium	0.6 mm	10 mm	190 gr	270 cm
#586373	Aluminium	0.6 mm	12 mm	200 gr	270 cm
#754117	Aluminium	0.6 mm	14 mm	210 gr	270 cm




Stair Step Noising Profiles




Stair Step Noising Profile - PVC Gasketed Type 1

Product Code	Material	Thickness	Height	Weight	Length
#286333	Aluminium	0.7 mm	11 mm	905 gr	250 cm




Stair Step Noising Profile - PVC Gasketed Type 2

Product Code	Material	Thickness	Width	Weight	Length
#231084	Aluminium	1.0 mm	41 mm	1025 gr	250 cm




Stair Step Noising Profile - Wide

Product Code	Material	Thickness	Height	Weight	Length
#435093	Aluminium	1.0 mm	10 mm	545 gr	250 cm
#143200	Aluminium	1.0 mm	12 mm	570 gr	250 cm
#549377	Aluminium	0.7 mm	10 mm	300 gr	250 cm
#534099	Aluminium	0.7 mm	12 mm	320 gr	250 cm




Stair Step Noising Profile - Round

Product Code	Material	Thickness	Height	Weight	Length
#534602	Aluminium	1.0 mm	10 mm	360 gr	250 cm
#716166	Aluminium	1.0 mm	12 mm	380 gr	250 cm
#595719	Aluminium	0.7 mm	10 mm	195 gr	250 cm
#694062	Aluminium	0.7 mm	12 mm	210 gr	250 cm




Stair Step Noising Profile - Bullnose

Product Code	Material	Thickness	Height	Weight	Length
#211206	Aluminium	1.0 mm	10 mm	250 gr	250 cm
#230377	Aluminium	0.7 mm	10 mm	220 gr	250 cm
#861339	Aluminium	0.6 mm	10 mm	200 gr	250 cm



Stair Step Noising Profile - L Shape Type 1

Product Code	Material	Thickness	Size (h x w)	Weight	Length
#783281	Aluminium	0.7 mm	10x25 mm	275 gr	250 cm
#509558	Aluminium	0.7 mm	22x38 mm	510 gr	250 cm




Stair Step Noising Profile - L Shape Type 2

Product Code	Material	Thickness	Height	Weight	Length
#232396	Aluminium	1.0 mm	15 mm	300 gr	250 cm




Finishing Profiles





Finishing Profile - F Shape

Product Code	Material	Thickness	Height	Weight	Length
#422723	Aluminium	1.0 mm	4 mm	195 gr	270 cm
#213227	Aluminium	1.0 mm	6 mm	205 gr	270 cm
#232190	Aluminium	1.0 mm	8 mm	235 gr	270 cm
#414586	Aluminium	1.0 mm	10 mm	250 gr	270 cm
#134901	Aluminium	1.0 mm	12 mm	280 gr	270 cm




Finishing Profile - L Shape

Product Code	Material	Thickness	Height	Weight	Length
#487075	Aluminium	0.80 mm	10 mm	200 gr	270 cm
#816737	Aluminium	0.80 mm	12 mm	210 gr	270 cm
#751469	Aluminium	0.60 mm	8 mm	140 gr	270 cm
#112473	Aluminium	0.60 mm	10 mm	150 gr	270 cm
#664343	Aluminium	0.60 mm	12 mm	160 gr	270 cm



Finishing Profile - L Shape Bendable

Product Code	Material	Thickness	Height	Weight	Length
#368339	Aluminium	0.60 mm	8 mm	140 gr	270 cm
#431362	Aluminium	0.60 mm	10 mm	150 gr	270 cm
#297875	Aluminium	0.60 mm	12 mm	160 gr	270 cm



Finishing Profile - Wide

Product Code	Material	Thickness	Height	Width	Length
#307441	Aluminium	1.0 mm	10 mm	380 gr	270 cm
#328049	Aluminium	1.0 mm	12 mm	450 gr	270 cm



Adhesives and Grout Fillers



Tile Adhesive

Tile Adhesive is specifically designed for fixing ceramic tiles. It ensures strong adhesion and durability, suitable for both wall and floor applications. Ideal for interior installations, it provides a secure bond, preventing tile displacement and ensuring long-lasting performance.

Product Code	Class	Coverage	Pot Life	Color	Usage Area	Weight
#613591	C1TE	~3-5 Kg / m²	6 Hours	Grey Powder	Interior	25 Kg
#923653	C1TE	~3-5 Kg / m²	6 Hours	White Powder	Interior	25 Kg
#940440	C2TE S1	~3-5 Kg / m²	6 Hours	Grey Powder	Exterior Floor	25 Kg
#388215	C2TE S1	~3-5 Kg / m²	6 Hours	White Powder	Exterior Floor	25 Kg
#761640	C2TE S2	~5-7 Kg / m²	5 Hours	Grey Powder White Liquid	Exterior Wall	25 Kg 5.75 Lt



Grout Filler

Grout Filler is used for filling gaps between tiles, ensuring a seamless and durable finish. It is suitable for all types of ceramic tiles, natural stones, decorative bricks, and mosaics.

Product Code	Class	Coverage*	Pot Life	Color	Usage Area	Weight
#226304	CG2A	~0.1 Kg / m²	1 Hours	● Grey Powder	Interior	20 Kg
#492403	CG2A	~0.1 Kg / m²	1 Hours	○ White Powder	Interior	20 Kg
#581920	CG2WA	~0.1 Kg / m²	1 Hours	● Grey Powder	Exterior	20 Kg
#190961	CG2WA	~0.1 Kg / m²	1 Hours	○ White Powder	Exterior	20 Kg

* Coverage is calculated based on a 60x60 cm tile with a 3 mm joint width.
* For other color requests, please contact us.

Grout Filler Other Colors

 Uludag Grey	 Satin Grey	 Didim Beige	 Bahama Beige	 Ivory	 Milet Brown	 Brown
 Milky Brown	 Kotto	 Atlas Blue	 Mediterran Blue	 Bitter	 Pistachio Green	 Satin Yellow
 Powder	 Rose Dust	 Vanilla	 Black	 Pool Blue	 Avanos Beige	 Ürgüp Beige
 Nevşehir Beige	 Anthracite	 Cocoa	 Jasmine			



Tile Leveling

The tile leveling system consists of wedges, clips, and pliers designed to eliminate lippage and ensure uniform alignment of tiles during installation. By maintaining even spacing and preventing movement, this system guarantees a professional, flawless finish while the adhesive mortar sets. It is ideal for large-format tiles, porcelain, granite, and ceramic surfaces, reducing the risk of uneven surfaces and ensuring long-lasting durability.



Clips

Tile leveling clips act as spacers, securing tiles in place to prevent shifting and height variations. They ensure uniform joint widths and, when used with wedges, create a perfectly leveled surface.

Product Code	Joint Width
#298124	1.0 mm
#516736	1.5 mm
#994851	2.0 mm



Tile Spacer

Tile leveling pliers are specially designed to adjust the pressure applied to wedges and clips, ensuring proper tension for optimal alignment. It enhance the efficiency of the leveling system, making the installation process faster and more accurate.

Product Code	Joint Width
#329095	1.0 mm
#274970	2.0 mm
#682500	3.0 mm



Wedge

The leveling wedge is inserted into the clip to apply consistent pressure between tiles, ensuring a smooth and even surface.

Product Code	Tile Thickness
#903069	6 - 14 mm




Plier

Tile leveling pliers are specially designed to adjust the pressure applied to wedges and clips, ensuring proper tension for optimal alignment. It enhance the efficiency of the leveling system, making the installation process faster and more accurate.



Product Code	Material
#714342	Metal
#397664	Plastic

Application



Set the pliers to the appropriate scale based on the tile thickness.

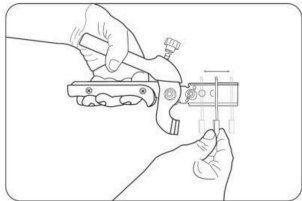


After putting tile on adhesive, the clips must be placed to the sides of the tile, making sure that their flat faces are placed on the base. After placing the clips, put the next tile.

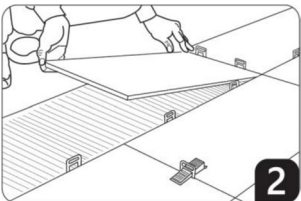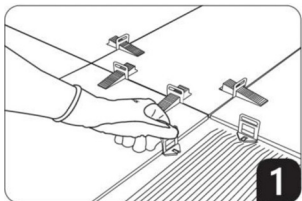


The wedges should be inserted into the clips manually. Wedges should be fixed to the clips socket by compressing manually.

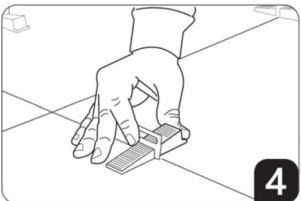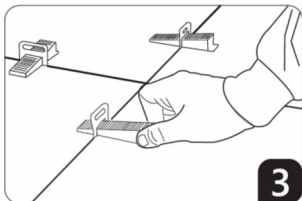



Levelling operation is completed after compressing the wedges with adjustable pliers.

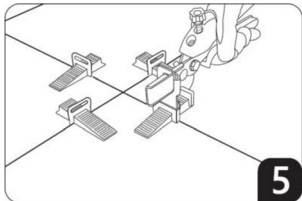

When the surface is finished, allow the adhesive to set for the time recommended.

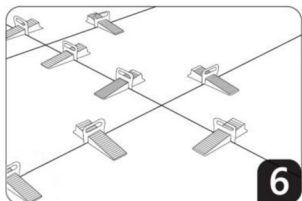

After the adequate time, remove the clips by hitting on them with a mallet or with your foot in the direction of the joint.

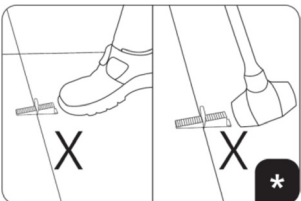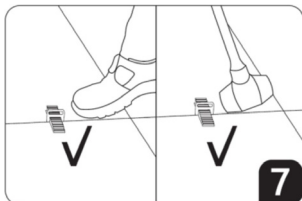



Installation Materials



Tile & Granite Cutting Machine - Pro

A tile & granite cutting machine is used for scoring and snapping ceramic, porcelain, and granite tiles with precision. Featuring a durable metal body and an adjustable guide system, it ensures clean and accurate cuts. Its strong diamond cutter blade provides long-lasting performance, making it ideal for professional tiling applications.

Product Code	Model	Cutting Length	Frame Material	Blade Type
#347761	Pro 60	600 mm	Metal	Diamond Cutter
#888065	Pro 90	900 mm	Metal	Diamond Cutter



Tile & Granite Cutting Machine - Plus

A tile & granite cutting machine with an aluminum body, designed for precise cutting of ceramic, porcelain, and granite tiles. Featuring a dual rail bearing system, it ensures smooth operation and accurate cuts. Equipped with a 10mm diamond cutter wheel, it provides durability and efficiency for professional tile installations.

Product Code	Model	Cutting Length	Frame Material	Blade Type
#701864	Plus 60	600 mm	Aluminum	10mm Diamond Cutter



Tile & Granite Cutting Machine - Dev

A tile & granite cutting machine with a reinforced metal body, designed for high-precision cutting of large ceramic, porcelain, and granite tiles. The bearing-guided cutting system ensures smooth operation, while the 22mm titanium-coated tungsten carbide cutter provides durability and efficiency. Equipped with a movable carrying handle and wheeled legs, it enhances portability and ease of use in professional tile installations.

Product Code	Model	Cutting Length	Frame Material	Blade Type
#849229	Dev 120	1200 mm	Metal	22mm Titanium-Coated Tungsten Carbide Cutter
#943027	Dev 135	1350 mm	Metal	22mm Titanium-Coated Tungsten Carbide Cutter
#304663	Dev 155	1550 mm	Metal	22mm Titanium-Coated Tungsten Carbide Cutter



Tile & Granite Cutting Machine - Long

A heavy-duty tile & granite cutting machine engineered for long-format tile cutting with high precision. The bearing-guided cutting system ensures smooth and accurate operation, while the 22mm titanium-coated tungsten carbide cutter provides durability and efficiency. Equipped with a laser guide for precise markings and wheeled legs for enhanced mobility, it is ideal for professional tile installation projects.

Product Code	Model	Cutting Length	Frame Material	Blade Type	Additional Features
#744406	Long 80	800 mm	Metal	22mm Titanium-Coated Tungsten Carbide Cutter	Laser Guide
#614916	Long 100	1000 mm	Metal	22mm Titanium-Coated Tungsten Carbide Cutter	Laser Guide
#605215	Long 120	1200 mm	Metal	22mm Titanium-Coated Tungsten Carbide Cutter	Laser Guide
#597344	Long 160	1600 mm	Metal	22mm Titanium-Coated Tungsten Carbide Cutter	Laser Guide



Diamond Cutter

A glass cutter pel is a precision tool used for scoring and cutting glass, ceramic, and porcelain tiles. It ensures clean, accurate cuts with minimal chipping. Ideal for manual tile cutting applications.

Product Code	Diameter	Material	Series
#561311	8 mm	Tungsten Carbide	Plus 60
#468357	10 mm	Tungsten Carbide	Plus 60
#692267	12 mm	Tungsten Carbide	Plus 60



Tile Cutting Disc

A tile cutting disc is used for cutting ceramic, porcelain, and granite tiles with precision. Available in titanium-coated and tungsten carbide options, it provides durability and sharpness for long-lasting performance.

Product Code	Diameter	Material	Series
#329815	22 mm	Titanium Coated	Pro / Mac Series
#323116	16 mm	Titanium Coated	Pro / Mac Series
#547841	22 mm	Tungsten Carbide	Pro / Mac Series
#646943	16 mm	Tungsten Carbide	Pro / Mac Series
#149946	22 mm	Titanium Coated	Dev / Long Series



Adjustable Rail Suction Cup

An adjustable rail suction cup is used in tiling applications to align and level large ceramic, granite, marble, and wall tiles. Its vacuum pump system provides a strong grip, ensuring precise positioning and minimizing height differences between tiles. Ideal for achieving seamless and professional tile installations.

Product Code	Cup Diameter	Max Adjustment Range	Max Load Capacity	Vacuum System
#927648	150 mm	0-40 mm (Width), 0-20 mm (Height)	120 kg	Air Pump Vacuum



Single Suction Cup

A single suction cup is designed for lifting and positioning smooth, non-porous surfaces such as glass, granite, ceramic, and laminate. Its strong vacuum grip ensures secure handling, reducing the risk of breakage during transportation and installation. Ideal for tile and glass applications.


Product Code	Cup Diameter	Max Load Capacity	Material	Vacuum System
#108138	120 mm	50 kg	Aluminum	Air Pump Vacuum



Double Suction Cup

A double suction cup is designed for securely lifting and transporting smooth, non-porous surfaces such as glass, granite, ceramic, and laminate. Its dual suction mechanism provides increased stability and weight distribution, making it ideal for handling larger and heavier materials with ease.

Product Code	Cup Diameter	Max Load Capacity	Material	Vacuum System
#875476	120 mm	100 kg	Aluminum	Air Pump Vacuum



Template Ruler

A template ruler is a foldable multi-angle measuring tool used for marking precise cutouts and angles in tile, flooring, wood, and metal applications. It helps professionals accurately measure and replicate complex shapes, ensuring perfect alignment during installations.

Product Code	Type	Material	Measurement Marking
#705571	6-Angle Foldable Ruler	Aluminum	Laser Engraved



Cordless Angle Grinder Set

A cordless angle grinder is a versatile power tool used for cutting, grinding, and polishing tiles, metals, and construction materials. Equipped with a brushless motor, it delivers high efficiency and longer runtime. Ideal for tiling and construction applications where mobility and precision are required.

Product Code	Disc Diameter	Connection Type	Voltage	Battery Capacity	Speed (RPM)	Charging Time
#384003	115 mm	M-14	20V	4.0 Ah	0-4500 / 7000 / 8500	90 min

* Battery and Charger is not included



Li-Ion Battery

Lithium-ion battery provides reliable and long-lasting power for cordless tools. It ensures high efficiency and extended runtime. Equipped with a battery level indicator, it allows users to monitor charge status easily.

Product Code	Voltage	Battery Capacity	Battery Type
#998014	20V	2.0 Ah	Li-Ion
#556932	20V	4.0 Ah	Li-Ion



Li-Ion Battery Charger

A 2.5A fast charger is designed for rapid and efficient charging of 20V lithium-ion batteries. It reduces downtime by fully charging a 2.0Ah battery in 45 minutes and a 4.0Ah battery in 90 minutes. Equipped with LED indicators, it provides real-time charging status updates.

Product Code	Charging Time (2.0Ah)	Charging Time (4.0Ah)	Compatibility
#419092	45 min	90 min	20V Li-Ion Batteries



Dual-Speed Mixer

A dual-speed mixer is designed for efficiently mixing paint, mortar, and adhesives in tiling and construction applications. Its adjustable speed settings allow precise control over mixing consistency, ensuring smooth and homogeneous blends.

Product Code	Power	Speed (RPM)	Connection Type	Paddle Size
#838928	1800W	180-400 / 300-700	M-14	120 mm



Mixing Paddle

A mixing paddle is used for blending tile adhesives, paints, plasters, and other construction materials to achieve a smooth and homogeneous mixture. Designed for use with electric drills or mixing machines, it ensures consistent blending without air bubbles. Ideal for professionals in tiling, construction, and painting applications.

Product Code	Length	Diameter	Connection Type
#510439	400 mm	80 mm	SDS Plus
#999390	450 mm	100 mm	SDS Plus
#870834	500 mm	120 mm	SDS Plus
#895046	600 mm	120 mm	SDS Plus
#152042	600 mm	120 mm	M14 Thread



Flexible Bucket

A flexible bucket is a multipurpose tool used in tiling and construction for carrying mortar, mixing materials, and cleaning surfaces. Its flexible plastic body allows easy handling and durability in demanding work environments.

Product Code	Capacity	Top Diameter	Bottom Diameter	Height	Material
#326232	16 L	Ø355 mm	Ø240 mm	245 mm	Extra Flexible Plastic



Notched Trowel

A notched trowel is used for applying tile adhesive evenly before tile installation. Its notched edges create uniform grooves, ensuring better adhesion and minimizing air pockets. Available with plastic or rubber handles for different grip preferences.

Product Code	Notch Size	Length	Handle Material	Blade Thickness
#697625	8x8 mm	40 cm	Rubber	0.7 mm
#168526	8x8 mm	50 cm	Rubber	0.7 mm
#609114	10x10 mm	40 cm	Rubber	0.7 mm
#386304	10x10 mm	50 cm	Rubber	0.7 mm
#656561	8x8 mm	30 cm	Plastic	0.7 mm
#307748	8x8 mm	35 cm	Plastic	0.7 mm
#917282	10x10 mm	30 cm	Plastic	0.7 mm
#671138	10x10 mm	35 cm	Plastic	0.7 mm



Sponge Float

A sponge float is used for cleaning excess grout and smoothing surfaces after tiling. Its absorbent sponge base helps remove residues without damaging tiles.

Product Code	Size	Base Material	Handle Material
#711843	175x245 mm	Sponge	Plastic



Rubber Float

A rubber float is designed for spreading and pressing grout into tile joints. Its soft rubber base ensures even filling without scratching tile surfaces.

Product Code	Size	Base Material	Handle Material
#191610	140x280 mm	Rubber	Plastic



Grout Float

A grout float is used to apply grout over tile surfaces, ensuring even coverage. It allows for efficient pressing and smoothing of grout into joints.

Product Code	Size	Base Material	Handle Material
#424013	115x280 mm	Rubber	Plastic
#122485	115x385 mm	Rubber	Plastic



Plastering Trowel

A plastering trowel is a hand tool used in tiling and construction for applying, spreading, and smoothing plaster, adhesive, or mortar onto surfaces. Its ergonomic design provides better control and precision, ensuring an even application.

Product Code	Length	Handle Material	Blade Thickness
#537631	16 cm	Wooden	1.2 mm
#370268	18 cm	Wooden	1.2 mm
#639666	20 cm	Wooden	1.2 mm
#892857	22 cm	Wooden	1.2 mm
#832001	24 cm	Wooden	1.2 mm
#952344	26 cm	Wooden	1.2 mm



Painter Spatula

A painter spatula is used for spreading and smoothing putty, plaster, or adhesive during surface preparation. It ensures a clean, even application, making it ideal for wall finishing, filling cracks, and removing excess materials. Frequently used in painting and renovation projects.

Product Code	Length	Handle Material	Blade Thickness
#518838	30 mm	Plastic	0.80 mm
#299444	40 mm	Plastic	0.80 mm
#799431	50 mm	Plastic	0.80 mm
#631024	60 mm	Plastic	0.80 mm
#379128	70 mm	Plastic	0.80 mm
#373341	80 mm	Plastic	0.80 mm
#104119	100 mm	Plastic	0.80 mm
#779091	120 mm	Plastic	0.80 mm



Scraper Spatula

A scraper spatula is designed for removing old coatings, scraping off excess materials, and smoothing surfaces before tiling or painting. Its sturdy blade allows efficient removal of plaster, adhesives, and paint residues. Essential for surface preparation in construction and renovation.

Product Code	Length	Handle Material	Blade Thickness
#207709	8 cm	Plastic	0.70 mm
#309043	10 cm	Plastic	0.70 mm
#349185	12 cm	Plastic	0.70 mm
#796333	14 cm	Plastic	0.70 mm



Grout Removal Tool

A grout removal tool is used for scraping out old, cracked, or damaged grout from tile joints before reapplying new grout. Its sharp metal blades ensure efficient grout removal without damaging surrounding tiles. Essential for tile maintenance and renovation projects.

Product Code	Blade Thickness	Blade Type	Head Material
#540610	1.5 mm	Dual Metal Blades	Plastic



Rubber Mallet

A rubber mallet is used in tiling and flooring applications to adjust and position tiles without causing damage. Its non-marring rubber head delivers controlled impact, ensuring tiles are properly set without cracks or displacement. Essential for achieving even and secure tile placement.

Product Code	Size	Handle Material	Head Material
#201138	No 50	Plastic	Rubber
#574544	No 60	Plastic	Rubber



Measuring Tape

Measuring tape is a precision tool used in tiling and construction to ensure accurate measurements for tile placement and alignment. It helps professionals maintain consistent spacing, cut tiles to the correct size, and achieve seamless installations. Essential for both layout planning and final adjustments, it improves efficiency and precision in tiling applications.

Product Code	Length	Width	Cover Material	Special Feature
#904905	3 m	16 mm	ABS Protection	Standard
#465052	5 m	19 mm	ABS Protection	Standard
#378973	5 m	25 mm	ABS Protection	Standard
#417532	10 m	25 mm	ABS Protection	Standard
#685147	3 m	16 mm	ABS Protection	Transparent Case
#564323	5 m	19 mm	ABS Protection	Transparent Case
#693476	5 m	25 mm	ABS Protection	Transparent Case
#115977	10 m	25 mm	ABS Protection	Transparent Case
#887887	3 m	16 mm	ABS Protection	Double Stop
#414718	5 m	19 mm	ABS Protection	Double Stop
#767047	5 m	25 mm	ABS Protection	Double Stop
#421228	10 m	25 mm	ABS Protection	Double Stop



Spirit Level

Spirit level is a precision tool used in construction, carpentry, and tiling to ensure surfaces are perfectly aligned. It helps professionals achieve accurate horizontal and vertical leveling by using built-in vials filled with liquid and an air bubble. The tool is essential for ensuring structural accuracy and proper installation in various applications.

Product Code	Length	Material	Coating	Magnetic Feature
#726008	40 cm	Aluminum	Electrostatic Powder	No
#743527	60 cm	Aluminum	Electrostatic Powder	No
#451536	80 cm	Aluminum	Electrostatic Powder	No
#693072	100 cm	Aluminum	Electrostatic Powder	No
#502350	40 cm	Aluminum	Anodized Coating	Yes
#562945	60 cm	Aluminum	Anodized Coating	Yes
#385596	80 cm	Aluminum	Anodized Coating	Yes
#545414	100 cm	Aluminum	Anodized Coating	Yes



Reel Extension Cable

A reel extension cable is designed for safe and organized power distribution in construction, workshops, and industrial applications. The retractable reel system allows for easy cable management, preventing tangling and ensuring efficient storage. With multiple socket outlets, it provides a reliable power source for various tools and equipment.

Product Code	Length	Reel Material	Socket Type
#727806	3x1.5 mm ² / 20m	Plastic	4-Socket Integrated
#601239	3x1.5 mm ² / 35m	Plastic	4-Socket Integrated
#482431	3x1.5 mm ² / 50m	Plastic	4-Socket Integrated
#592920	3x2.5 mm ² / 20m	Plastic	4-Socket Integrated
#730567	3x2.5 mm ² / 30m	Plastic	4-Socket Integrated
#934672	3x2.5 mm ² / 40m	Plastic	4-Socket Integrated
#700709	3x2.5 mm ² / 50m	Plastic	4-Socket Integrated
#638102	Empty Reel	Plastic	-
#280974	3x2.5 mm ² / 20m	Metal	4-Socket Integrated
#604267	3x2.5 mm ² / 30m	Metal	4-Socket Integrated
#593155	3x2.5 mm ² / 40m	Metal	4-Socket Integrated
#966329	3x2.5 mm ² / 50m	Metal	4-Socket Integrated
#140742	Empty Reel	Metal	-

Technical Specifications

Wall Tiles

Technical Specifications

Theme	Our Products	TS EN 14411 Annex-K		Tesh Method
Length and Width	± 0.4 %	± 0.5 %	± 2.0 mm	TS EN ISO 10545 - 2
Thickness	± 10 %	± 10 %	± 0.5 mm	TS EN ISO 10545 - 2
Straightness of Sides	± 0.2 %	± 0.3 %	± 1.5 mm	TS EN ISO 10545 - 2
Rectangularity	± 0.4 %	± 0.5 %	± 2.0 mm	TS EN ISO 10545 - 2
Center Curvature	+ 0.4 % - 0.2 %	+0.5 % - 0.3 %	+ 2.0 % - 1.5 %	TS EN ISO 10545 - 2
Edge Curvature	+ 0.4 % - 0.2 %	+0.5 % - 0.3 %	+ 2.0 % - 1.5 %	TS EN ISO 10545 - 2
Warpage	± 0.4 %	± 0.5 %	± 2.0 mm	TS EN ISO 10545 - 2
Surface Quality	5 % Defective	5 % Defective		TS EN ISO 10545 - 2
Water Absorption	% 10 - 20	% 10 - 20		TS EN ISO 10545 - 3
Breaking Strength (≥7.5 mm)	Min. 600 N	Min. 600 N		TS EN ISO 10545 - 4
Breaking Strength (<7.5 mm)	Min. 200 N	Min. 200 N		TS EN ISO 10545 - 4
Modulus of Rupture	Min. 15 N / mm²	Min. 15 N / mm²		TS EN ISO 10545 - 4
Thermal Shock Resistance	Resistant	Required		TS EN ISO 10545 - 9
Cracking Resistance	Resistant	Required		TS EN ISO 10545 - 11
Resistance to Acids / Alkalis	LB - HB	As Declared		TS EN ISO 10545 - 13
Resistance to Household Chem.	Min. Class B	Min. Class B		TS EN ISO 10545 - 13
Resistance to Staining	Min. Class 3	Min. Class 3		TS EN ISO 10545 - 14

Glossy Floor Tiles

Technical Specifications

Theme	Our Products	TS EN 14411 Ek-J		Tesh Method
Length and Width	± 0.5 %	± 0.6 %	± 2.0 mm	TS EN ISO 10545 - 2
Thickness	± 5 %	± 5 %	± 0.5 mm	TS EN ISO 10545 - 2
Straightness of Sides	± 0.3 %	± 0.5 %	± 1.5 mm	TS EN ISO 10545 - 2
Rectangularity	± 0.5 %	± 0.5 %	± 2.0 mm	TS EN ISO 10545 - 2
Center Curvature	± 0.3 %	+0.5 %	+ 2.0 mm	TS EN ISO 10545 - 2
Edge Curvature	± 0.3 %	+0.5 %	+ 2.0 mm	TS EN ISO 10545 - 2
Warpage	± 0.3 %	± 0.5 %	± 2.0 mm	TS EN ISO 10545 - 2
Surface Quality	5% Defective	5% Defective		TS EN ISO 10545 - 2
Water Absorption	Max 6.0 %	Max 6.0 %		TS EN ISO 10545 - 3
Breaking Strength (≥7.5 mm)	Min. 1000 N	Min. 1000 N		TS EN ISO 10545 - 4
Breaking Strength (<7.5 mm)	Min. 600 N	Min. 600 N		TS EN ISO 10545 - 4
Modulus of Rupture	Min. 22 N / mm²	Min. 22 N / mm²		TS EN ISO 10545 - 4
Impact Resistance	Resistant	Required		TS EN ISO 10545 - 5
Abrasion Class	Min. II	As Declared		TS EN ISO 10545 - 7
Thermal Shock Resistance	Resistant	Required		TS EN ISO 10545 - 9
Cracking Resistance	Resistant	Required		TS EN ISO 10545 - 11
Frost Resistance	Resistant	Required		TS EN ISO 10545 - 12
Resistance to Acids / Alkalis	LB-HB	As Declared		TS EN ISO 10545 - 13
Resistance to Household Chem.	Min. Class B	Min. Class B		TS EN ISO 10545 - 13
Resistance to Staining	Min. Class 3	Min. Class 3		TS EN ISO 10545 - 14

Matte Floor Tiles

Technical Specifications

Theme	Our Products	TS EN 14411 Ek-H		Tesh Method
Length and Width	± 0.5 %	± 0.6 %	± 2.0 mm	TS EN ISO 10545 - 2
Thickness	± 5 %	± 5 %	± 0.5 mm	TS EN ISO 10545 - 2
Straightness of Sides	± 0.3 %	± 0.5 %	± 1.5 mm	TS EN ISO 10545 - 2
Rectangularity	± 0.5 %	± 0.5 %	± 2.0 mm	TS EN ISO 10545 - 2
Center Curvature	± 0.3 %	+0.5 %	+ 2.0 mm	TS EN ISO 10545 - 2
Edge Curvature	± 0.3 %	+0.5 %	+ 2.0 mm	TS EN ISO 10545 - 2
Warpage	± 0.3 %	± 0.5 %	± 2.0 mm	TS EN ISO 10545 - 2
Surface Quality	5% Defective	5% Defective		TS EN ISO 10545 - 2
Water Absorption	Max 3.0 %	Max 3.0 %		TS EN ISO 10545 - 3
Breaking Strength (≥7.5 mm)	Min. 1100 N	Min. 1100 N		TS EN ISO 10545 - 4
Breaking Strength (<7.5 mm)	Min. 700 N	Min. 700 N		TS EN ISO 10545 - 4
Modulus of Rupture	Min. 30 N / mm²	Min. 30 N / mm²		TS EN ISO 10545 - 4
Impact Resistance	Resistant	Required		TS EN ISO 10545 - 5
Abrasion Class	Min. II	As Declared		TS EN ISO 10545 - 7
Thermal Shock Resistance	Resistant	Required		TS EN ISO 10545 - 9
Cracking Resistance	Resistant	Required		TS EN ISO 10545 - 11
Frost Resistance	Resistant	Required		TS EN ISO 10545 - 12
Resistance to Acids / Alkalis	LB-HB	As Declared		TS EN ISO 10545 - 13
Resistance to Household Chem.	Min. Class B	Min. Class B		TS EN ISO 10545 - 13
Resistance to Staining	Min. Class 3	Min. Class 3		TS EN ISO 10545 - 14

Tile Adhesive

Technical Specifications

Related Products: #613591, #923653

Theme	Performance	Tesh Method
Slip	≤ 0.5 mm	EN 12004-2
Open Time	After 30 Mins ≥ 0.5 N / mm²	EN 12004-2
Tensile Adhesion Strength		
• Initial	≥ 0.5 N / mm²	EN 12004-2
• After Heat Exposure	≥ 0.5 N / mm²	EN 12004-2
• After Immersion In Water	≥ 0.5 N / mm²	EN 12004-2
• After Freeze / Thaw Cycles	≥ 0.5 N / mm²	EN 12004-2
Service Temperature Range	(- 40 °C) - (+80 °C)	-
Reaction to Fire	A1	EN 13501-1

Related Products: #761640

Theme	Performance	Tesh Method
Slip	≤ 0.5 mm	EN 12004-2
Open Time	After 30 Mins ≥ 0.5 N / mm²	EN 12004-2
Tensile Adhesion Strength		
• Initial (After 28 Days)	≥ 1 N / mm²	EN 12004-2
• After Heat Exposure	≥ 1 N / mm²	EN 12004-2
• After Immersion In Water	≥ 1 N / mm²	EN 12004-2
• After Freeze / Thaw Cycles	≥ 1 N / mm²	EN 12004-2
Service Temperature Range	(- 40 °C) - (+80 °C)	-
Reaction to Fire	A2s1d0	EN 13501-1

Related Products: #940440, #388215

Theme	Performance	Tesh Method
Slip	≤ 0.5 mm	
Slip	≤ 0.5 mm	ANSI A118.4 6.0
Open Time Tensile Adhesion Strength	After 30 Mins ≥ 0.5 N / mm²	
Open Time	≥ 75 psi (0.5 MPa) at 30 Minutes	ANSI A118.4 5.3
Tensile Adhesion Strength		
• Initial (After 28 Days)	≥ 1 N / mm²	
• After Heat Exposure	≥ 1 N / mm²	
• After Immersion In Water	≥ 1 N / mm²	
• After Freeze / Thaw Cycles	≥ 1 N / mm²	
Shear Strength, Impervious Ceramic (After 28 Days)	> 200 psi (1.03 MPa)	ANSI A118.4 7.2.5
Shear Strength, Glazed Wall Tile (After 7 Days)	> 300 psi (1.03 MPa)	ANSI A118.4 7.1.2
Shear Strength, Quarry Tile (After 28 Days)	> 150 psi (1.03 MPa)	ANSI A118.4 7.3.2
Shear Strength, Quarry Tile to Plywood (After 28 Days)	> 150 psi (1.03 MPa)	ANSI A118.11 4.1.2
Deformability	≥ 2.5 mm - S1 Deformable	
Service Temperature Range (After Final Cure)	(- 40 °C) - (+80 °C)	
Reaction to Fire	A2	

Grout Filler

Technical Specifications

Related Products: #226304, #492403

Theme	Performance	Tesh Method
Flexural Strength	≥ 2.5 N / mm²	EN 12808-3
Compressive Strength	≥ 15 N / mm²	EN 12808-3
Flexural Strength (After Freeze / Thaw Cycles)	≥ 2.5 N / mm²	EN 12808-3
Compressive Strength (After Freeze / Thaw Cycles)	≥ 15 N / mm²	EN 12808-3
Abrasion Resistance	≤ 1000 mm³	EN 12808-2
Shrinkage	≤ 3 mm / m	EN 12808-4
Water Absorption After 30 mins / 4 hours	≤ 5 g. / ≤ 10 g.	EN 12808-5
Services Temperature Range (After Final Cure)	(- 30 °C) - (+80 °C)	

Related Products: #581920, #190961

Theme	Performance	Tesh Method
Flexural Strength (After 28 Days)	≥ 2.5 N / mm²	EN 12808-3
Compressive Strength (After 28 Days)	≥ 15 N / mm²	EN 12808-3
Flexural Strength (After Freeze / Thaw Cycles)	≥ 2.5 N / mm²	EN 12808-3
Compressive Strength (After Freeze / Thaw Cycles)	≥ 15 N / mm²	EN 12808-3
Abrasion Resistance	≤ 1000 mm³	EN 12808-2
Shrinkage	≤ 3 mm / m	EN 12808-4
Water Absorption After 30 mins / 4 hours	≤ 2 g. / ≤ 5 g.	EN 12808-5
Services Temperature Range (After Final Cure)	(- 30 °C) - (+80 °C)	

Legend Guide

Wall Tiles

Floor Tiles

Porcelain

Glossy

Matte

Rectified

Full Lappato

Semi Lappato

Technical Porcelain

MOHS Scratch Resistance

Uniform Appearance

Slight Variation

Moderate Variation

Substantial Variation


Low Traffic

Medium Traffic

Heavy Traffic


Extra Traffic

This guide provides an overview of the technical characteristics and classifications of tiles. Each symbol represents a specific feature, including surface finish, material composition, and performance properties. Understanding these symbols helps in selecting the most suitable tiles for different applications. For detailed specifications, refer to the product descriptions.

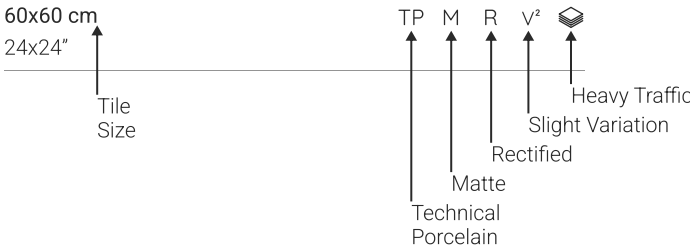

Shade Variation

Tile shades and tones may vary due to natural differences in raw materials, firing temperatures, and production processes. These variations enhance the unique character of each tile installation. To achieve a balanced look, it is recommended to inspect and arrange multiple tiles from the same batch before installation. If a specific level of uniformity or variation is desired, consult your supplier or installer beforehand, as shade differences are an inherent characteristic of tiles.

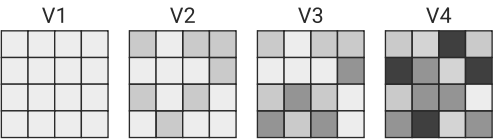

Abrasion Resistance of Floor Tiles

Floor tiles are subjected to different levels of wear depending on their usage area and foot traffic. Abrasion resistance measures a tile’s ability to withstand surface wear caused by foot traffic, dirt, and mechanical impact.

Low Traffic

Tiles suited for general residential traffic. For areas that are walked on by soft soled or normal footwear without any scratching dirt. Not suitable for kitchen, entrance halls, stairs and other areas subjected to medium traffic

Medium Traffic

Tiles suitable for areas subject to frequent foot traffic yet protected from abrasive agents such as sand, gravel and soil; for example corridors, private kitchens, balconies, terraces, hotel rooms.

Heavy Traffic

Tiles suitable for areas subject to frequent foot traffic and heavy abrasion, for example shops, hotels, restaurants, bars, schools, offices. Particularly suitable for areas in direct contact with outside.

Extra Traffic

Suitable for heavy traffic indoor and outdoor environments.

Contact Us

Türkiye Head Office

Soğanlık Yeni Mah. Baltacı Mehmet Paşa Sk. No: 4A/446 Zip: 34880

Kartal, İstanbul / Türkiye

info@cofiwo.com

0850 450 1954

Contact Offices

Cameroon Contact Office

Nfandena, 35141 Omnisport, Yaoundé / Cameroon

cameroon@cofiwo.com

+237 681 27 83 80

Netherlands Contact Office

Dromerdijk 25 , 1446BP Purmerend / Netherlands

netherlands@cofiwo.com

+31 687 312 596

Canada Contact Office

197 Deepsprings Crescent, ON L6A 3L3 Maple / Canada

canada@cofiwo.com

+1 647 612 62 26